
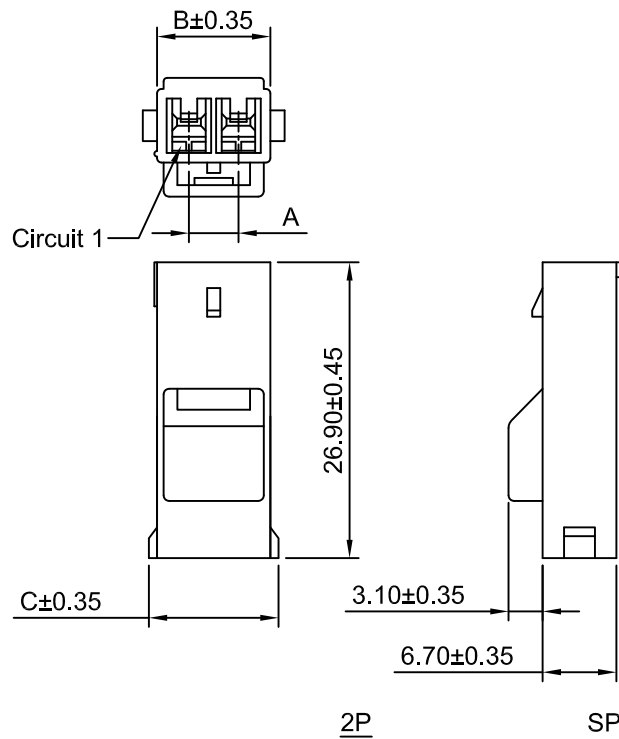
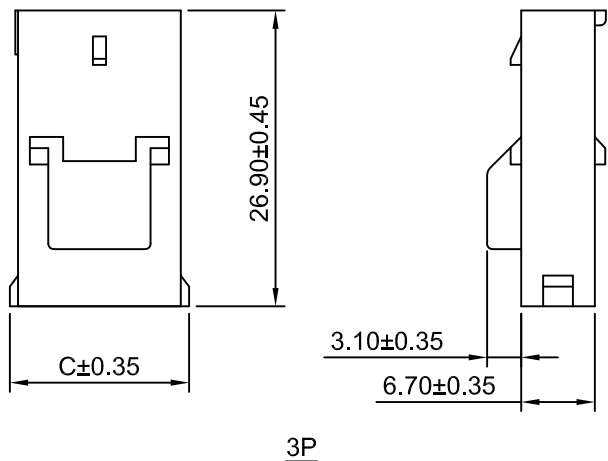


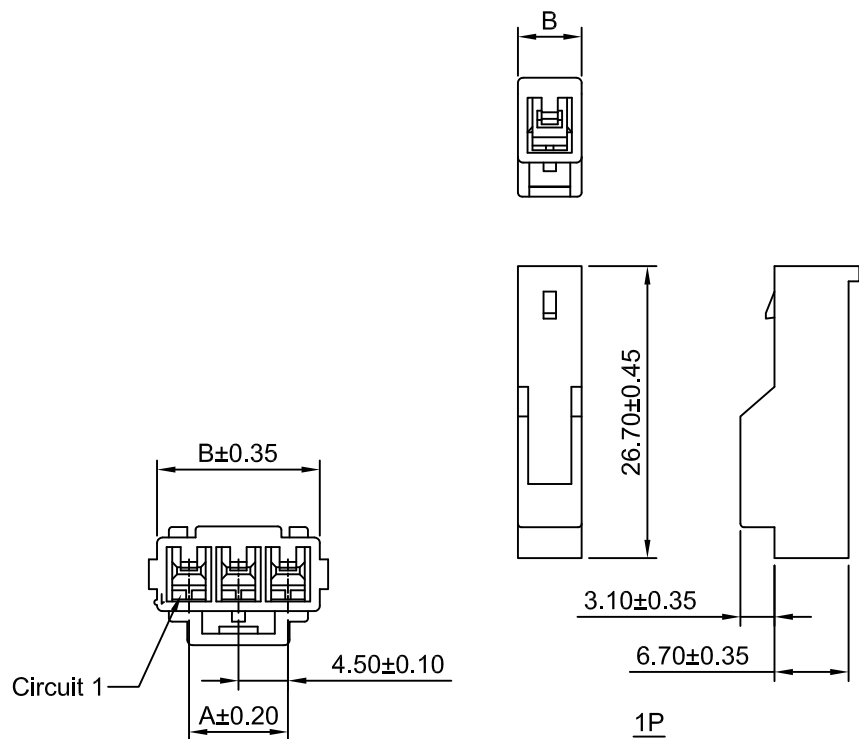

Ordering Information:

C4501HMA-XP - ***
1 2

1.Part NO.

2.Material:

(blank): Nylon 66,UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),IEC 60335-1,5th Edition
Glow Wire Capable.

SPECIFICATIONS:

Current Rating: 10A AC,DC

Voltage Rating: 300V AC,DC

Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Contact Resistance: $7\text{m}\Omega$ Max.

Insulation Resistance: $1000\text{M}\Omega$ Min.

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
C4501HMA-1P	---	5.80	---
C4501HMA-2P	4.50	10.30	11.80
C4501HMA-3P	9.00	14.80	16.30

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE 4.50mm PITCH HOUSING	
mm		1.5:1		1 of 1			
DRAWN		CHK'D		APPR			
Chengbiao Ye		Diankui Wan		Jack Yin		DRAWING NO. C4501HMA-XP	
General Tolerances				THIRD ANGLE PROJECTION 			
x,x±0.25							
x,x±0.20							
x,xxx±0.15							
ANGLES ±1°							
						REV A3	