
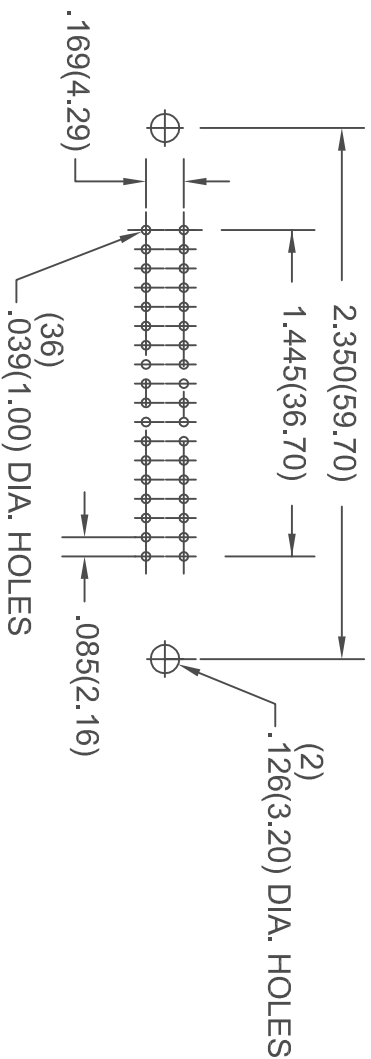
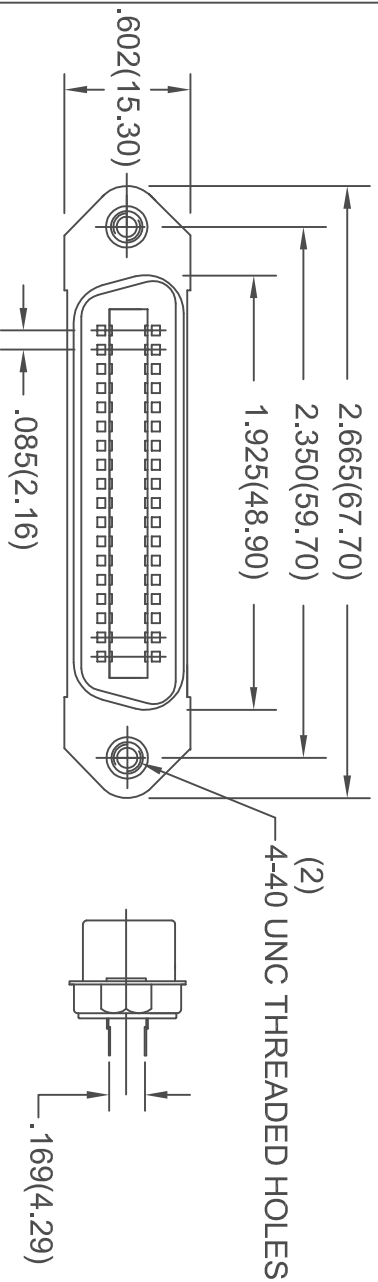
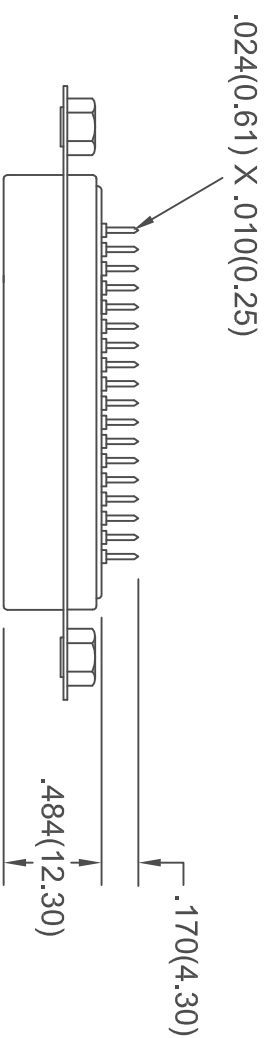




MATERIALS:

INSULATOR: THERMOPLASTIC P.B.T.
UL RATED 94V-0
CONTACTS: COPPER ALLOY
GOLD PLATED ON CONTACT AREA
TIN ON COMPLAINT SECTION OVER NICKEL
SHELL : STEEL NICKEL PLATED

ELECTRICALS:

CONTACT CURRENT RATING: 5 AMPS
DIELECTRIC WITHSTANDING VOLTAGE:
1000 VAC MIN.
INSULATION RESISTANCE: 1000 mohms
MIN. AT 500V DC
CONTACT RESISTANCE: 30 MOHMS MAXIMUM
OPERATING TEMPERATURE: -55°C TO +105°C



THIS SERIES FULLY CONFORMS TO THE
EUROPEAN UNION DIRECTIVES 2002/95/EC
AND 2002/96/EC FOR RoHS COMPLIANCY.

36 POSITION MINIATURE RIBBON RECEPTACLE			ACAD REFERENCE NO. B57-036-221-802
DRAWN: F BRIONES		DATE: JAN. 09/07	
PART NUMBER			B57-036-221-802
DRAWING NUMBER			B57-036-221-802
YOUR CONNECTION TO QUALITY & SERVICE			ISSUE 1



EDAC INC
TORONTO, ONTARIO
CANADA

THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF EDAC INC. AND
SHALL NOT BE REPRODUCED OR COPIED
OR USED AS THE BASIS FOR THE
MANUFACTURE OR SALE OF APPARATUS
WITHOUT WRITTEN PERMISSION.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[EDAC:](#)

[B57-036-221-802](#)