


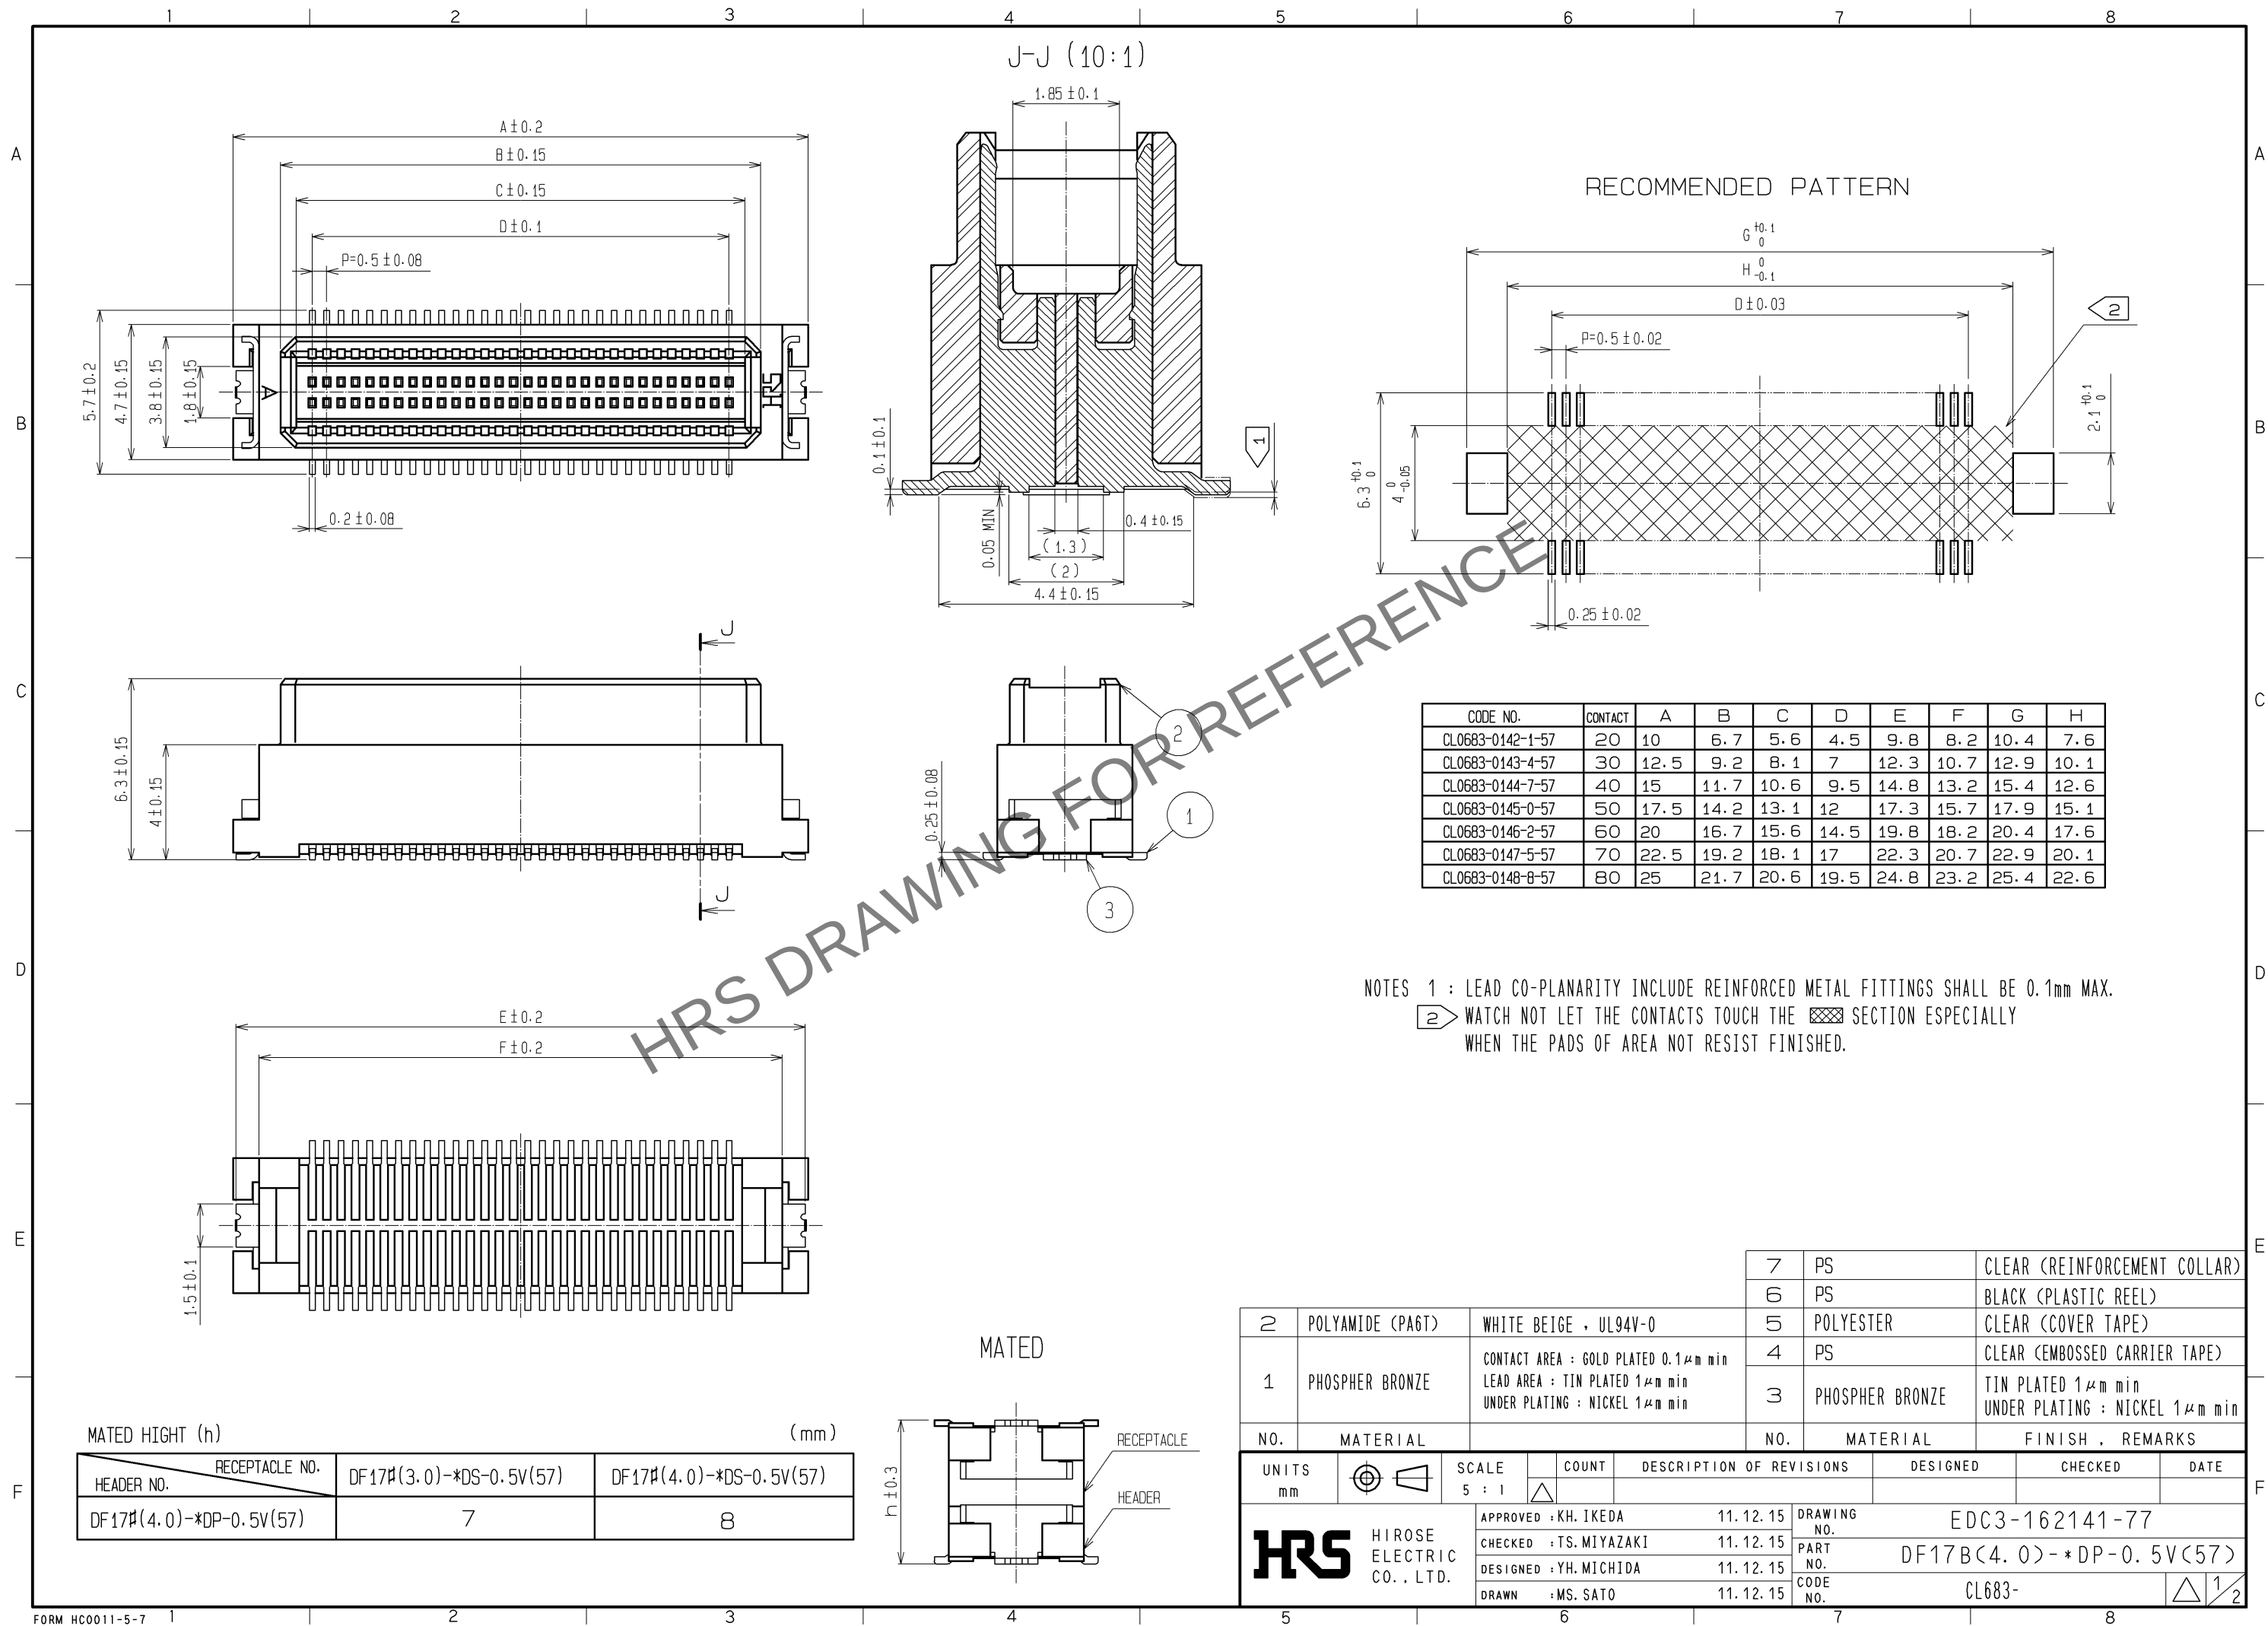


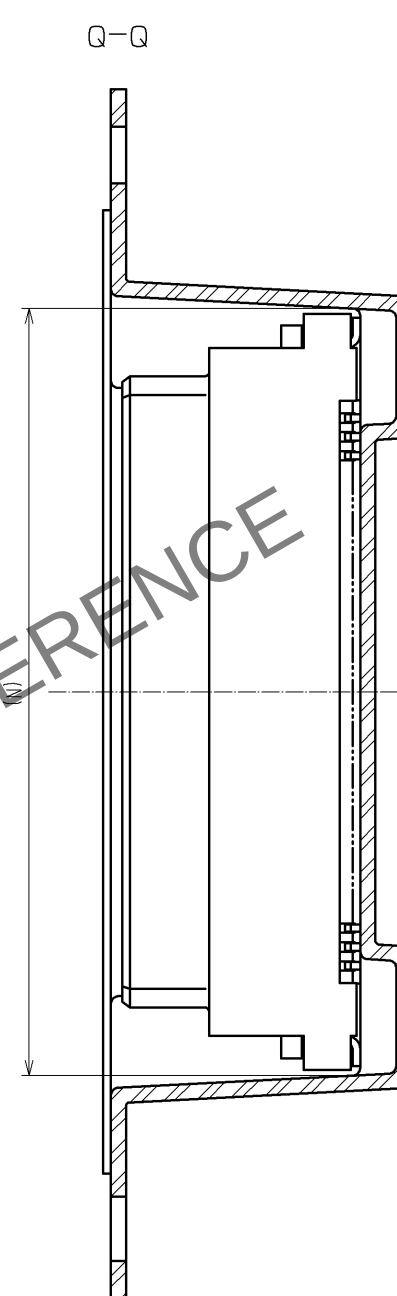

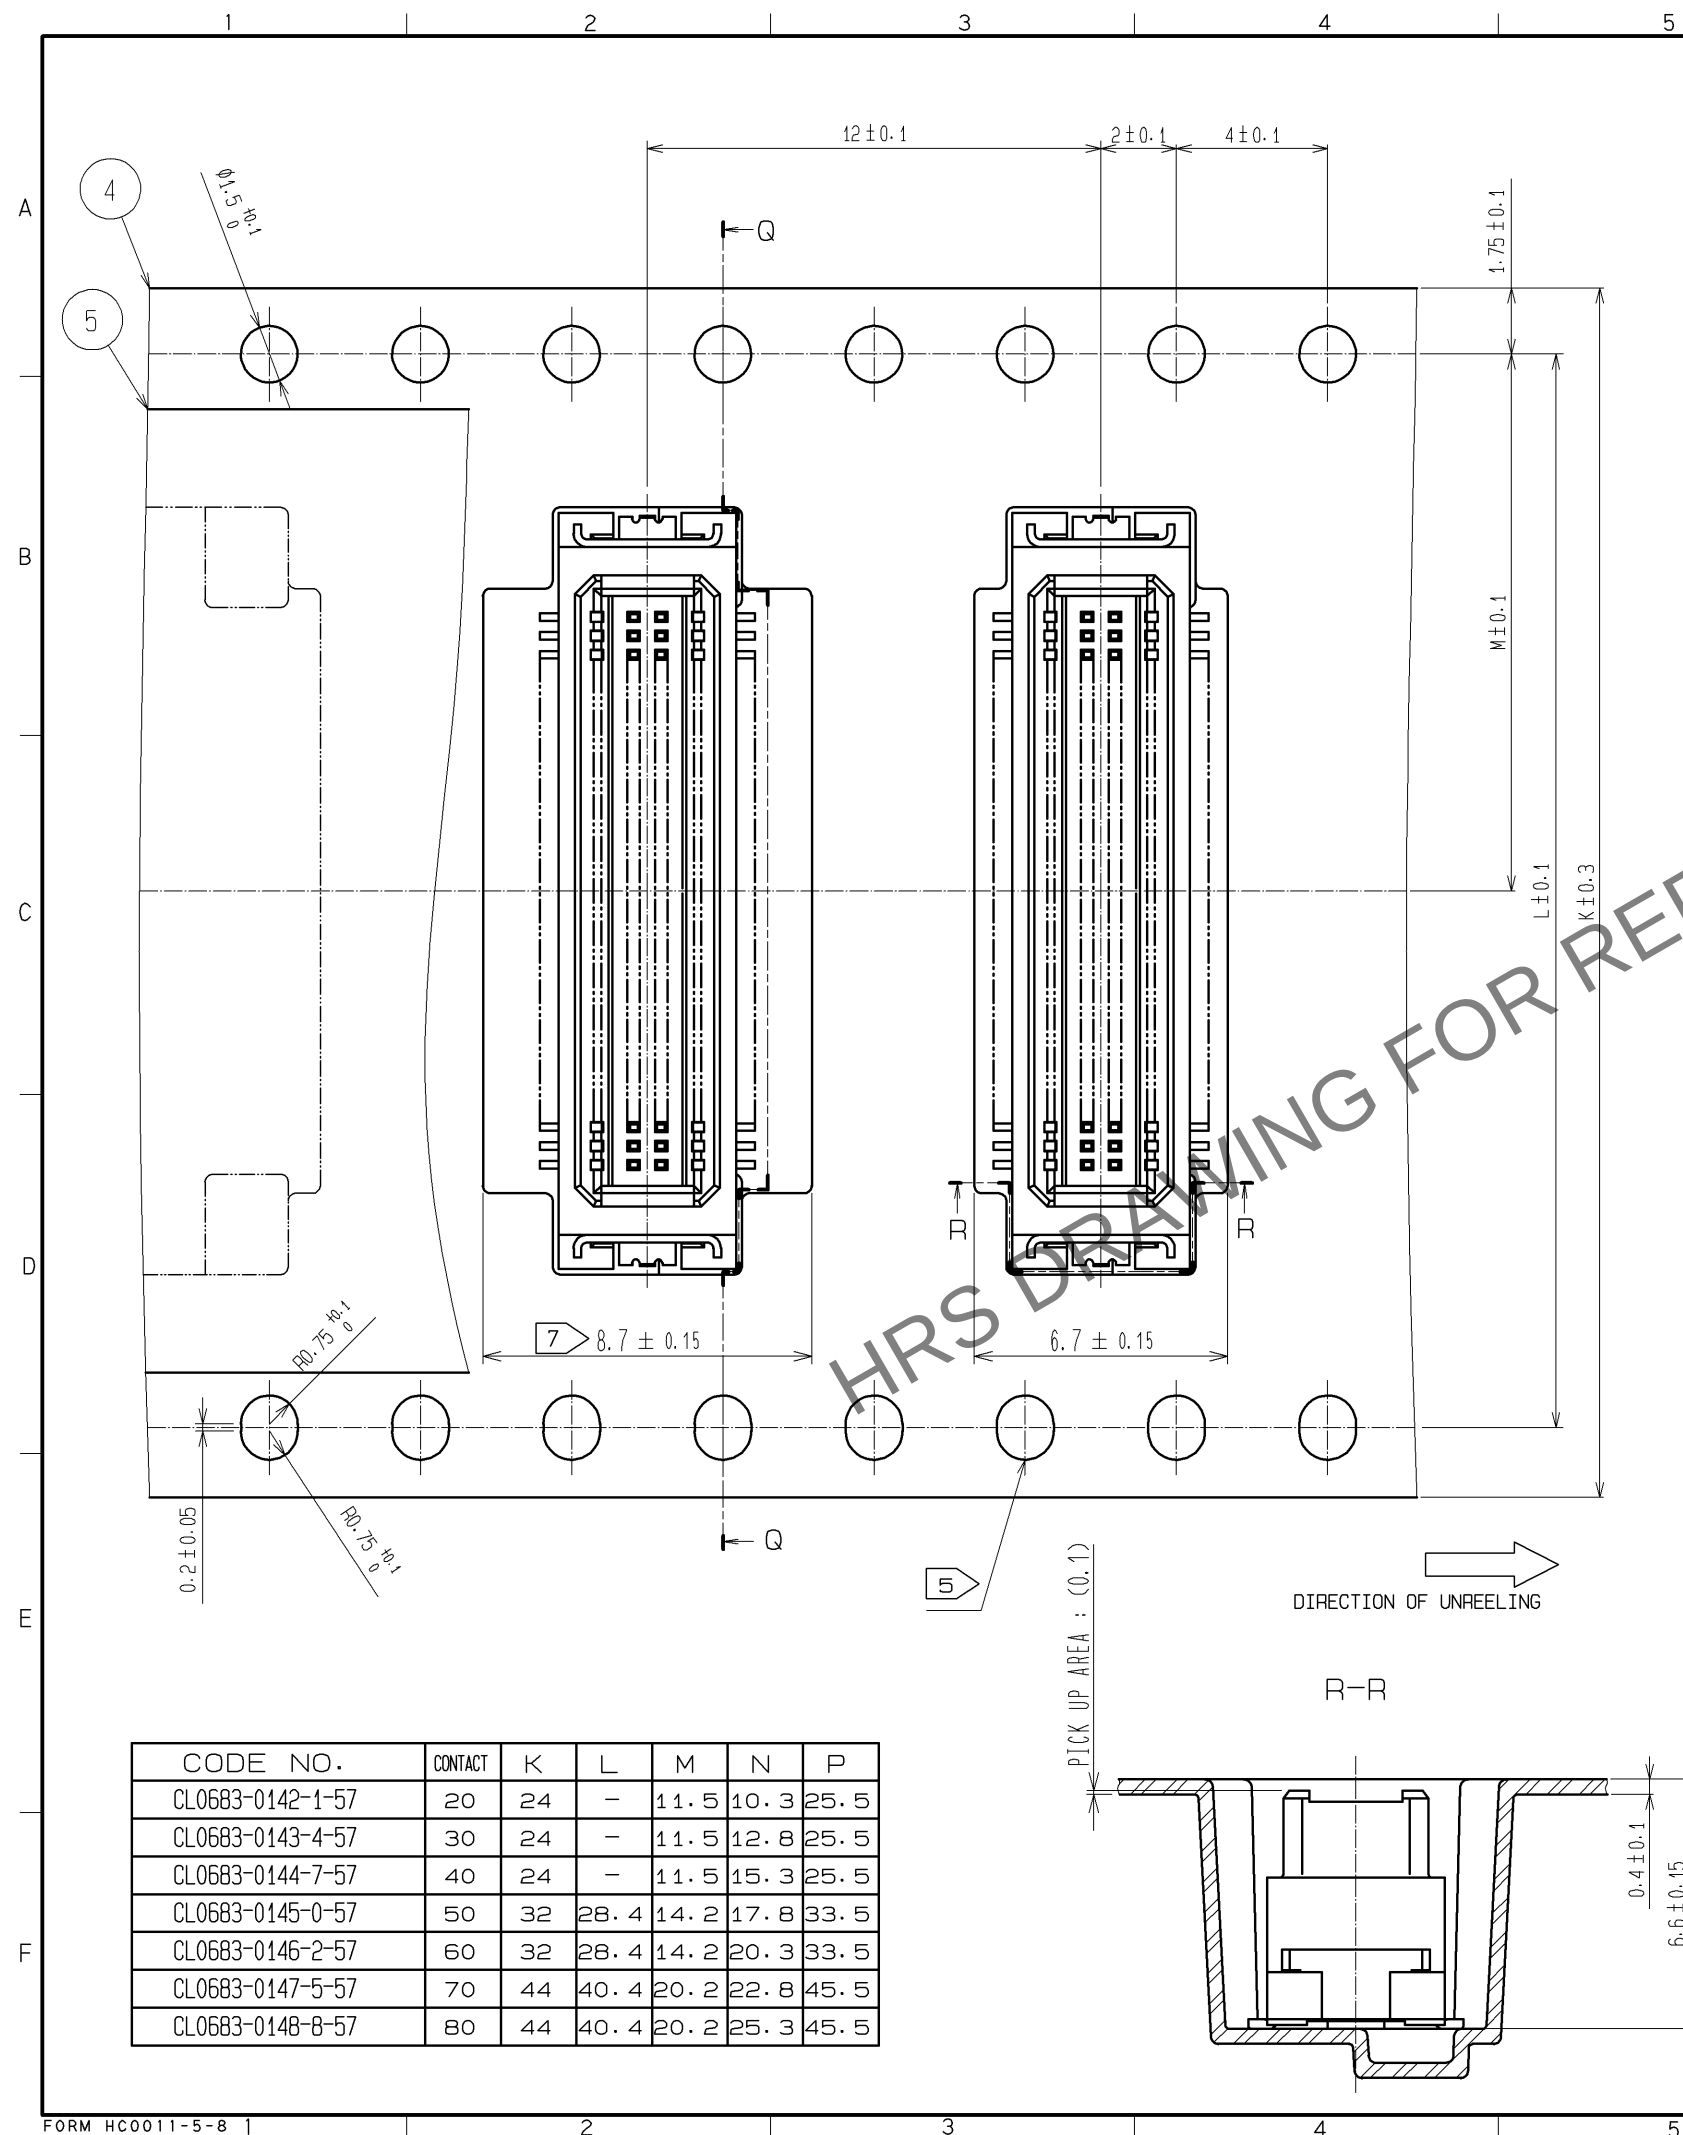

STYLE AND DIMENSION OF REEL (FREE)

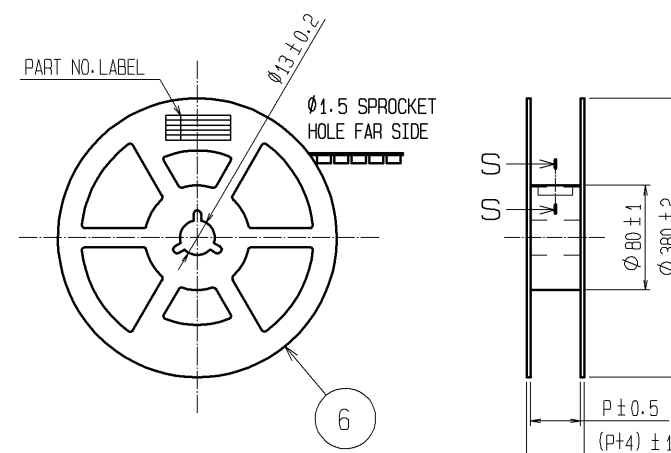


DETAIL OF PART NO. LABEL

— SUPPLIER  
— QUANTITY  
— PART NO.  
— CODE NO.  
— DATE OF MANUFACTURED

|      |                         |
|------|-------------------------|
| 生産月日 | 年 月 日                   |
| ☒ 番  | CL683-****-*-57         |
| 品 名  | DF17B(4.0)-*DP-0.5V(57) |
| 納入数量 | 1000 K0                 |
| 納入者  | ヒロセ電機(株)                |

S-S (FREE)

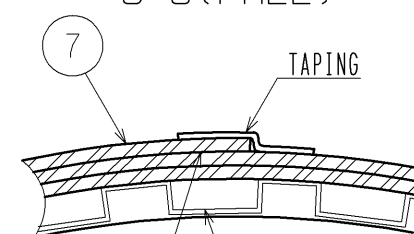

8 REINFORCEMENT COLLAR / TAPE AND REEL POCKET

NOTES 3 : 1 REEL : 1000 CONNECTORS.

4 : AT THE BEGINNING OF THE REEL , 30 COMPONENTS SHALL BE EMPTY.  
AT THE END OF THE REEL, 20 COMPONENTS SHALL BE EMPTY.

5 WHEN THE TAPE WIDTH IS 32mm or 44mm, SPROCKET HOLES SHALL BE SET ON BOTH SIDES OF REEL AS SHOWN ON THIS DRAWING.

6 : PEEL FORCE REFERS TO JIS C 0806.

7 A POCKET SHAPE IS DIFFERENT AT INTERVALS OF EACH CAVITY NUMBER TO AVOID OVERLAP.

8 AFTER PACKAGING, ROLL 2 METERS OF THE REINFORCEMENT COLLAR TO OUTER CIRCUMFERENCE OF TAPE AND REEL POCKET, AND TAPE DOWN AT THE END THE COLLAR.

|            |             |                         |     |
|------------|-------------|-------------------------|-----|
| <b>HRS</b> | DRAWING NO. | EDC3-162141-77          |     |
|            | PART NO.    | DF17B(4.0)-*DP-0.5V(57) |     |
|            | CODE NO.    | CL683-                  | △ 2 |