

Terminal Part Number: 12052457
Surface Plating: SN
Material Thickness [mm]: 0,40
Cross Section [mm²]: 0,50 | 0,80

This document is non-contractual
and for information only.

For more information, please
consult your local sales office



Cable Type codes: 1005
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,60 - 2,20
Seal(s): 15324997

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,50 / 15324997		1,74	80	1,35	0,05	2,35	0,10	6,20	0,20	6,20	0,20
1005 0,80 / 15324997		2,03	90	1,40	0,05	2,50	0,10	6,20	0,20	6,30	0,20

Cable type code legend:

1005:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, PVDF, XLPE
Insul. Wall Designator: THIN

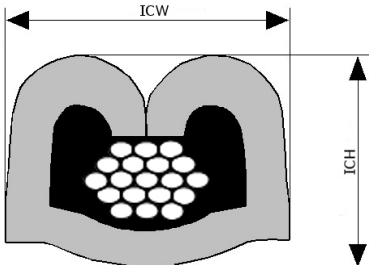

Terminal Part Number: 12052457
Surface Plating: SN
Material Thickness [mm]: 0,40
Cross Section [mm²]: 0,50 | 0,80

This document is non-contractual
and for information only.

For more information, please
consult your local sales office



Cable Type codes: 1005
Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
Insulation Range Φ[mm]: 1,60 - 2,20
Seal(s): 15324997

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,50 / 15324997		1,74	80	1,35	0,05	2,35	0,10	6,20	0,20	6,20	0,20
1005 0,80 / 15324997		2,03	90	1,40	0,05	2,50	0,10	6,20	0,20	6,30	0,20

Cable type code legend:

1005:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, PVDF, XLPE
Insul. Wall Designator: THIN

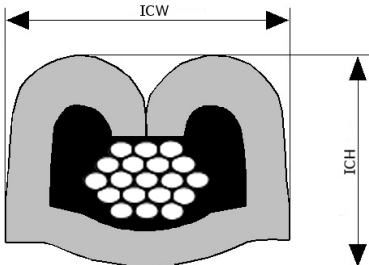

Terminal Part Number: 12052457
Surface Plating: SN
Material Thickness [mm]: 0,40
Cross Section [mm²]: 0,50 | 0,80

This document is non-contractual
and for information only.

For more information, please
consult your local sales office



Cable Type codes: 1007
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,00 - 2,45
Seal(s): 15324995

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 0,50 / 15324995		2,15	80	1,35	0,05	2,50	0,10	6,20	0,20	6,20	0,20
1007 0,80 / 15324995		2,33	90	1,40	0,05	2,50	0,10	6,30	0,20	6,30	0,20

Cable type code legend:

1007:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPA/PVDF, XLPE
Insul. Wall Designator: REGULAR

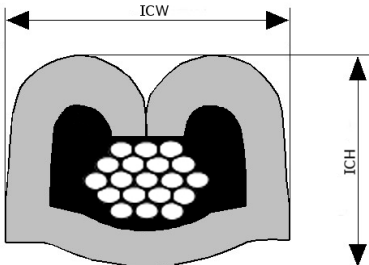

Terminal Part Number: 12052457
Surface Plating: SN
Material Thickness [mm]: 0,40
Cross Section [mm²]: 0,50 | 0,80

This document is non-contractual
and for information only.

For more information, please
consult your local sales office



Cable Type codes: 1007
Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
Insulation Range Φ[mm]: 2,00 - 2,45
Seal(s): 15324995

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 0,50 / 15324995		2,15	80	1,35	0,05	2,50	0,10	6,20	0,20	6,20	0,20
1007 0,80 / 15324995		2,33	90	1,40	0,05	2,50	0,10	6,30	0,20	6,30	0,20

Cable type code legend:

1007:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPA/PVDF, XLPE
Insul. Wall Designator: REGULAR

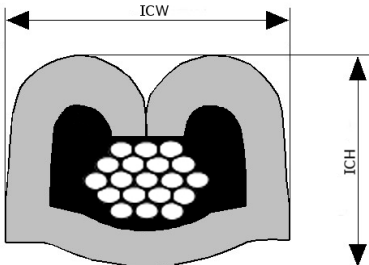

Terminal Part Number: 12052457
Surface Plating: SN
Material Thickness [mm]: 0,40
Cross Section [mm²]: 0,80

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1009
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,50 - 3,05
Seal(s): 15324994

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1009 0,80 / 15324994		2,78	90	1,40	0,05	2,50	0,10	6,30	0,20	6,30	0,20

Cable type code legend:

1009:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPE
Insul. Wall Designator: SPECIAL

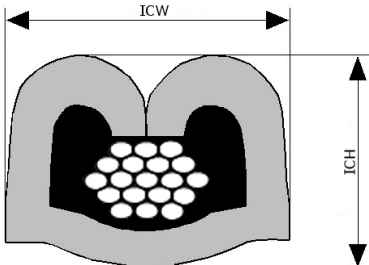

Terminal Part Number: 12052457
Surface Plating: SN
Material Thickness [mm]: 0,40
Cross Section [mm²]: 0,80

This document is non-contractual
and for information only.



For more information, please
consult your local sales office

Cable Type codes: 1009
Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
Insulation Range Φ[mm]: 2,50 - 3,05
Seal(s): 15324994

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1009 0,80 / 15324994		2,78	90	1,40	0,05	2,50	0,10	6,30	0,20	6,30	0,20

Cable type code legend:

1009:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPE
Insul. Wall Designator: SPECIAL

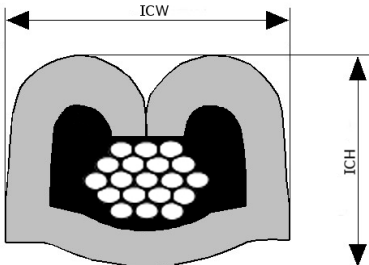

Terminal Part Number: 12052457
Surface Plating: SN
Material Thickness [mm]: 0,40
Cross Section [mm²]: 0,50

This document is non-contractual
and for information only.

For more information, please
consult your local sales office



Cable Type codes: 1011
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,65 - 2,90
Seal(s): 15324995

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1011 0,50 / 15324995		2,78	80	1,35	0,05	2,50	0,10	6,30	0,20	6,40	0,20

Cable type code legend:

1011:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: EAE, POLYOLEFIN, PVC, TPE, XLPE
Insul. Wall Designator: HEAVY DUTY

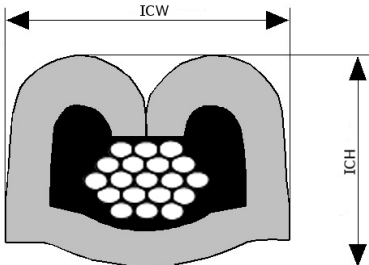

Terminal Part Number: 12052457
Surface Plating: SN
Material Thickness [mm]: 0,40
Cross Section [mm²]: 0,50

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1011
Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
Insulation Range Φ[mm]: 2,65 - 2,90
Seal(s): 15324995

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1011 0,50 / 15324995		2,78	80	1,35	0,05	2,50	0,10	6,30	0,20	6,40	0,20

Cable type code legend:

1011:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: EAE, POLYOLEFIN, PVC, TPE, XLPE
Insul. Wall Designator: HEAVY DUTY

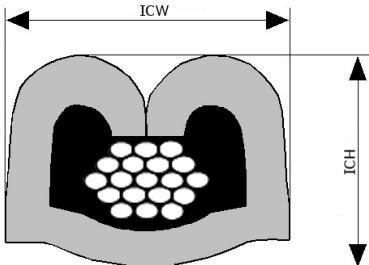

Terminal Part Number: 12052457
Surface Plating: SN
Material Thickness [mm]: 0,40
Cross Section [mm²]: 0,50

*This document is non-contractual
and for information only.*



*For more information, please
consult your local sales office*

Cable Type codes: 1027
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,30 - 2,60
Seal(s): 15324995

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1027 0,50 / 15324995		2,45	80	1,35	0,05	2,50	0,10	6,30	0,20	6,40	0,20

Cable type code legend:

1027:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: PVC, XLPE
Insul. Wall Designator: SPECIAL

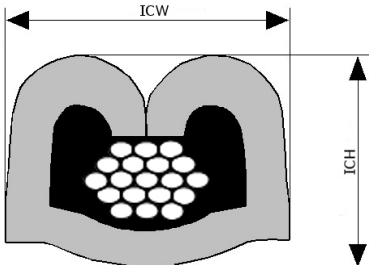

Crimp Information Sheet

DELPHI

Terminal Part Number: 12052457

Surface Plating: SN

Material Thickness [mm]: 0,40

Cross Section [mm²]: 0,50 | 0,75

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 2010

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Insulation Range Φ [mm]: 1,30 - 1,90

Seal(s): 15324997

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2010 0,50 / 15324997		1,50	80	1,50	0,05	2,05	0,10	5,90	0,10	6,50	0,20
2010 0,75 / 15324997		1,75	120	1,60	0,05	2,10	0,10	6,00	0,10	6,50	0,20

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE, XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN

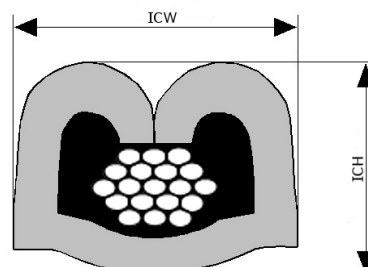

Terminal Part Number: 12052457
Surface Plating: SN
Material Thickness [mm]: 0,40
Cross Section [mm²]: 0,50 | 0,75

This document is non-contractual
and for information only.

For more information, please
consult your local sales office

Cable Type codes: 2083
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,40 - 1,90
Seal(s): 15324997

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2083 0,50 / 15324997		1,55	75	1,40	0,05	2,00	0,10	6,00	0,10	6,40	0,20
2083 0,75 / 15324997		1,80	85	1,35	0,05	2,45	0,10	6,10	0,20	6,50	0,20

Cable type code legend:

2083:
Industry Designator: ISO
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC (YW)
Insul. Wall Designator: THIN

