



1

Header connector of Board β	Recommended spacer height(L)
FX10A-144P-SV(**)	$8 \pm 0.127\text{mm}$
FX10A-144P-SV(**)	$9 \pm 0.127\text{mm}$
FX10A-144P-SV1(**)	$10 \pm 0.127\text{mm}$

4

E

S: Signal for Differential SE: Signal for Single-ended G1: Common ground 1 G2: Common ground 2

F



FORM HC0011-5-7	1	2	3	4	5	6	7	8
-----------------	---	---	---	---	---	---	---	---

Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

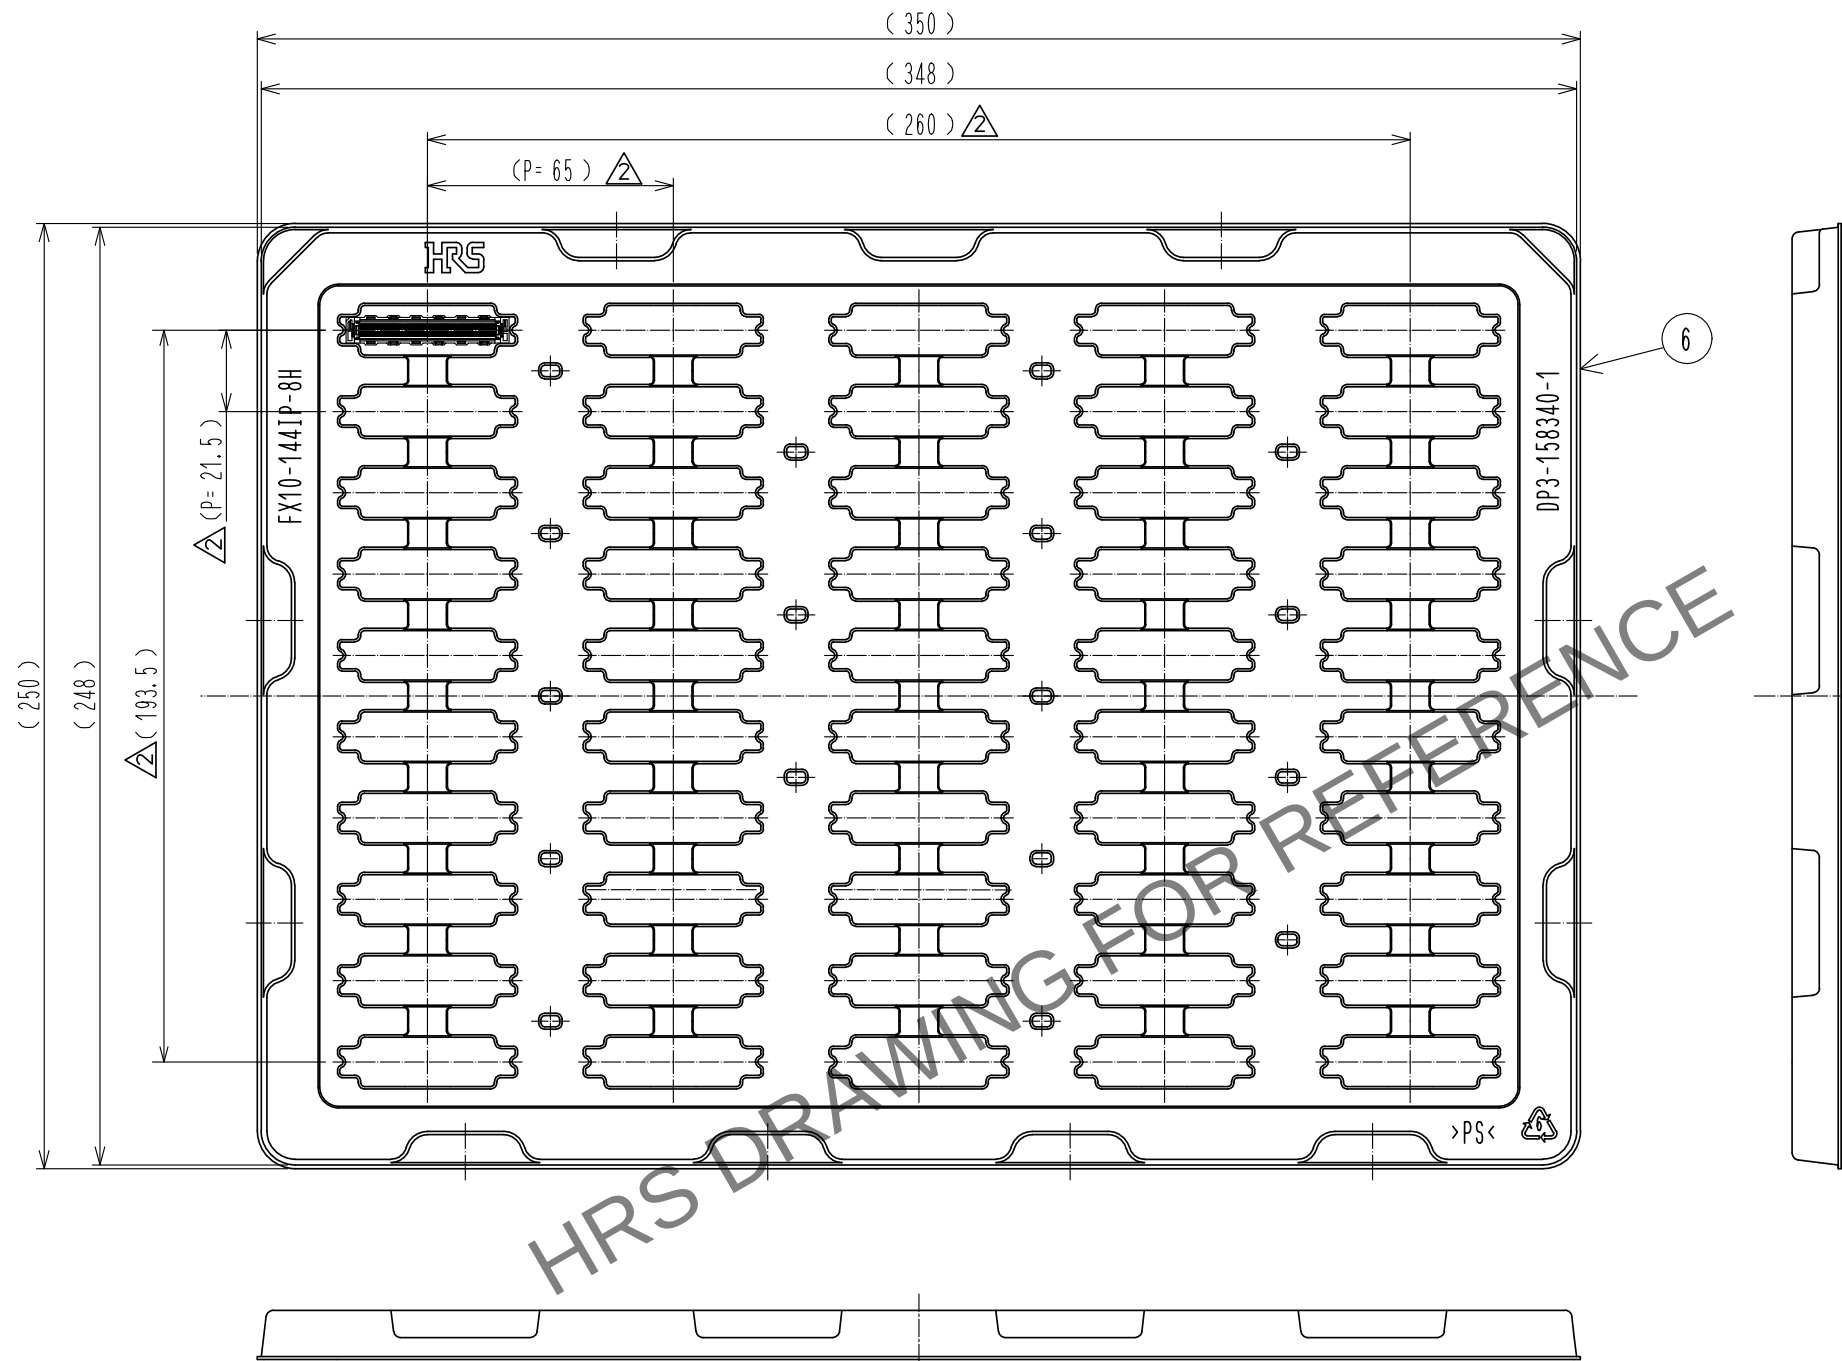


Fig.3 Drawing for packing (1:2) 6

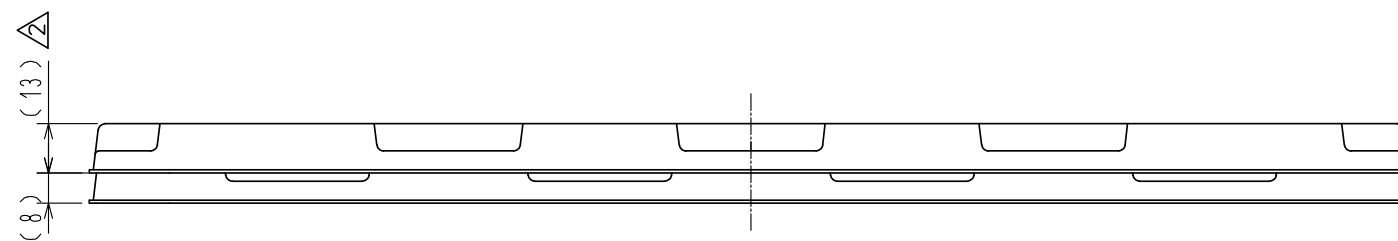


Fig.4 Stacked tray drawing (1:2)

HRS

DRAWING NO.	EDC-354344-03-03
PART NO.	FX10-144IP-44Q-8H<03>
CODE NO.	CL608-0008-2-03

2/2