

		THIS COPY IS PROVIDED ON A	A RESTRICTED BASIS AN	AND IS NOT TO BE USED IN ANY	WAY DETRIMENTAL TO THE	HE INTERESTS OF PANDUIT COR
--	--	----------------------------	-----------------------	------------------------------	------------------------	-----------------------------

Material	High Conductivity Seamless Copper Tube		
Plating	Electro-Tin		
Wire Size	4 AWG, 3 AWG & 2SOL		
Wire Type	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric		
Wire Strip Length	1 1/8 in.		
Stud Size	1/2 in.		
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.		
UL Temperature Rating	90° C		
C.S.A Certified Wire Connector	N/A		
Panduit Color Code on Barrel	GRAY		
Panduit Die Index No. on Barrel	P29		
Alternate Industry Die Index No. ( ) on Barrel	(8)		



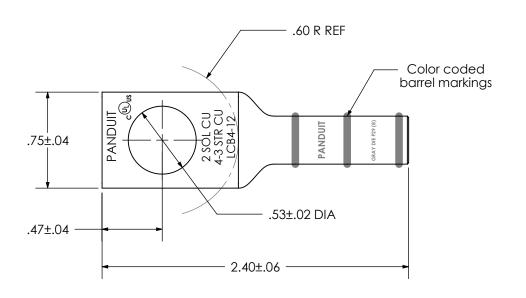

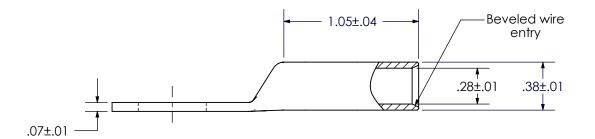

						CORP. TINLEY PARK, ILLINOIS
						LCB4-12-L
00	5/16	JHNU	JHNU	DRAWING RELEASED	00127LBM- LCB4-12-CUST	Copper Lug - One-Hole, Long Barrel
REV	DATE	BY	СНК	DESCRIPTION	ECN	SCALE N/A DRAWING NO / CAD FILE LCB4-12-CUST