


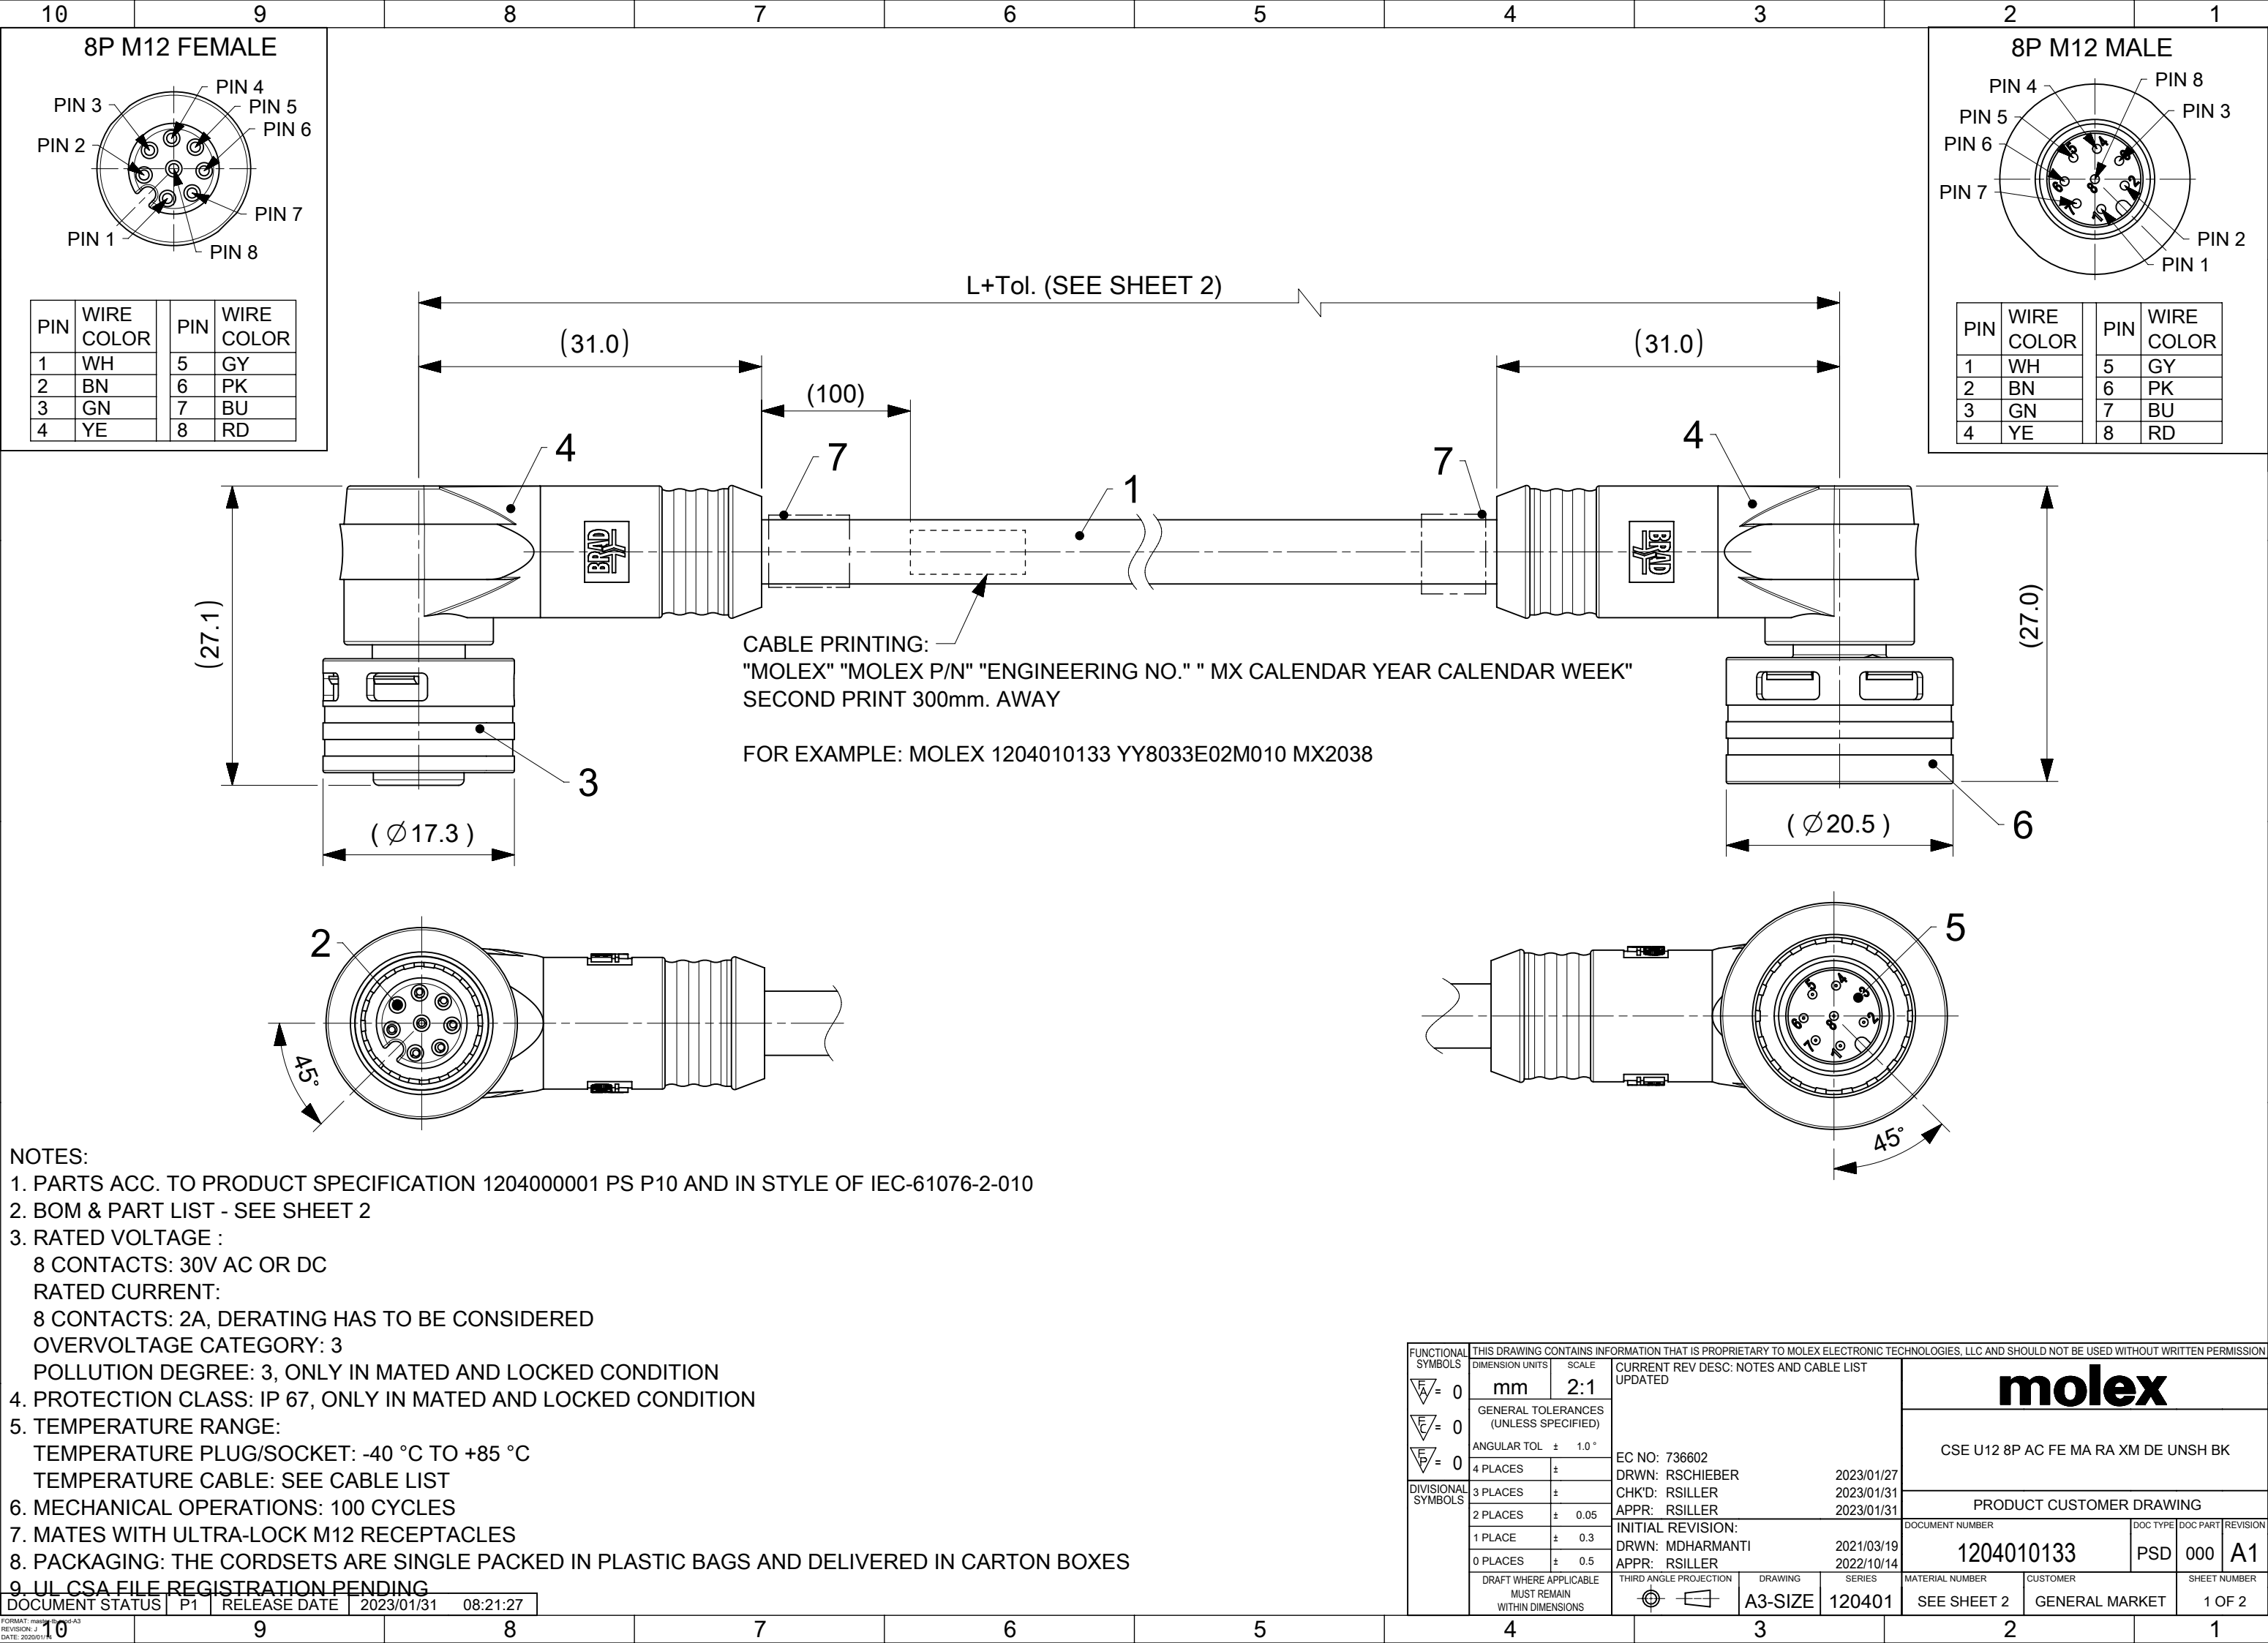

PART No MATRIX

Y

Y

X

0

3

3

X

X

X


➤

✓

1

11

SCALE 1:1

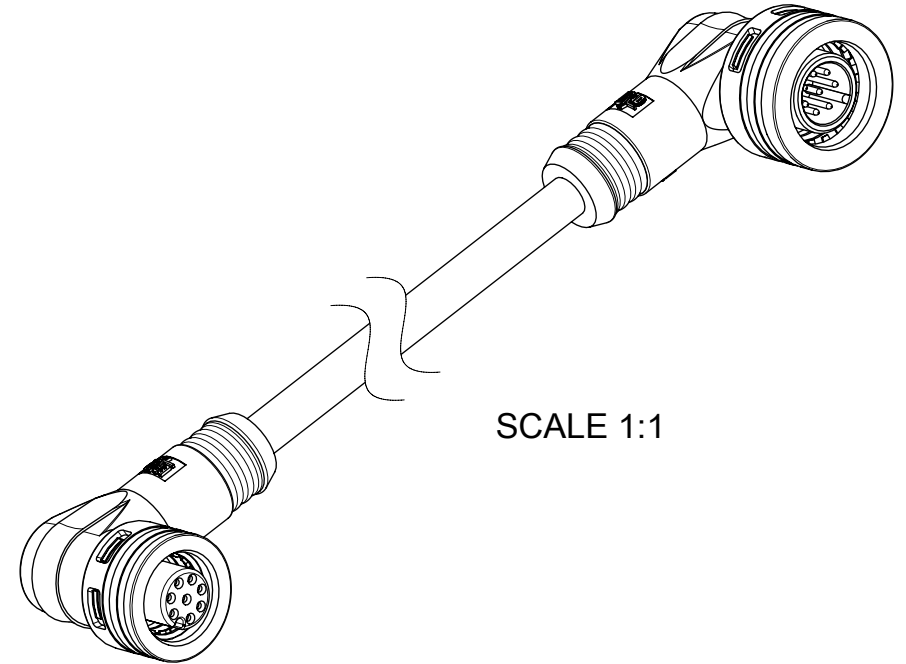

CABLE LIST

8P	CABLE TYPE	DESCRIPTION	MATERIAL	FINISH/COLOR	FIXED INSTALLATION *		FLEXIBLE INSTALLATION **		DRAG CHAIN	
					MIN.	MAX.	MIN.	MAX.	MIN.	MAX.
X	E02	8X0.25MM;UNSHLD;PVC;BK;OD=6.60MM	PVC	BLACK	-30°C	+80°C	-10°C	+80°C	NOT SUITABLE	
X	B41	CABLE 8X0.25 TPU BK D6.40 TPE UNSH DCS	PUR WSOR	BLACK	-40°C	+90°C	-25°C	+80°C	-5°C	+60°C
X	H08	CABLE PUR;BLK 8X0.25MM-LSOH;UL OD=6.10	PUR-LS0H	BLACK	-40°C	+80°C	-25°C	+80°C	+5°C	+60°C

* FIXED POSITION WITHOUT ACCIDENTAL CRUSHING OF VIBRATION.

** FREE MOTION WITHOUT PERIODIC RECURRENCE OR FORCED GUIDANCE.

BILL OF MATERIAL

ITEM	QTY	DESCRIPTION	MATERIAL	FINISH/COLOR
1	-	CABLE	SEE CABLE LIST	SEE CABLE LIST
2	8	CONTACT 8 FE TUR AU	BRASS	GOLD OVER NICKEL PLATED
3	1	PLG U12 8P AC FE PA UNSH	-	-
4	2	OVERMOLD	TPC	SEE MATRIX
5	8	CONTACT 8 MA TUR AU	BRASS	GOLD OVER NICKEL PLATED
6	1	PLG U12 8P AC MA PA UNSH WT	-	-
7	SEE PN MATRIX *	I/D CARRIER DIA 4-7MMX30MM	PVC	TRANSPARENT

* IF IN MATRIX IS "H" - ADD ID-CARRIERS ON THE BOTH SIDES HARNESS

DOCUMENT STATUS	P1	RELEASE DATE	2023/01/31	08:21:27
-----------------	----	--------------	------------	----------

CABLE LENGTH TOLERANCES	
LENGTH	TOLERANCE
0m-1m	+40 mm
>1m-5m	+60 mm
>5m-10m	+80 mm
>10m-20m	+140 mm
>20m-30m	+160 mm
>30m	+1% length

PART LIST

MOLEX NO.	ENGINEERING NO.	LENGTH (mm)
1204010133	YY8033E02M010	1000
1204010134	YY8033E02M020	2000
1204010135	YY8033E02M050	5000
1204010136	YY8033E02M100	10000
1204010137	YY8033B41M010	1000
1204010138	YY8033B41M020	2000
1204010139	YY8033B41M050	5000
1204010140	YY8033B41M100	10000
1204010141	YY8033H08M010	1000
1204010142	YY8033H08M020	2000
1204010143	YY8033H08M050	5000
1204010144	YY8033H08M100	10000

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
	DIMENSION UNITS		SCALE		CURRENT REV DESC: NOTES AND CABLE LIST UPDATED					molex CSE U12 8P AC FE MA RA XM DE UNSH BK						
	mm		2:1													
	GENERAL TOLERANCES (UNLESS SPECIFIED)															
	ANGULAR TOL ± 1.0°															
	4 PLACES		±		EC NO: 736602 DRWN: RSCHIEBER 2023/01/27 CHK'D: RSILLER 2023/01/31 APPR: RSILLER 2023/01/31					PRODUCT CUSTOMER DRAWING						
	3 PLACES		±													
	2 PLACES		± 0.05													
	1 PLACE		± 0.3		INITIAL REVISION: DRWN: MDHARMANTI 2021/03/19 APPR: RSILLER 2022/10/14					DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION		
	0 PLACES		± 0.5							1204010133		PSD	000	A1		
DIVISIONAL SYMBOLS		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
					A3-SIZE		120401		SEE PART LIST		GENERAL MARKET		2 OF 2			