




Terminals & Splices > Spade Terminals

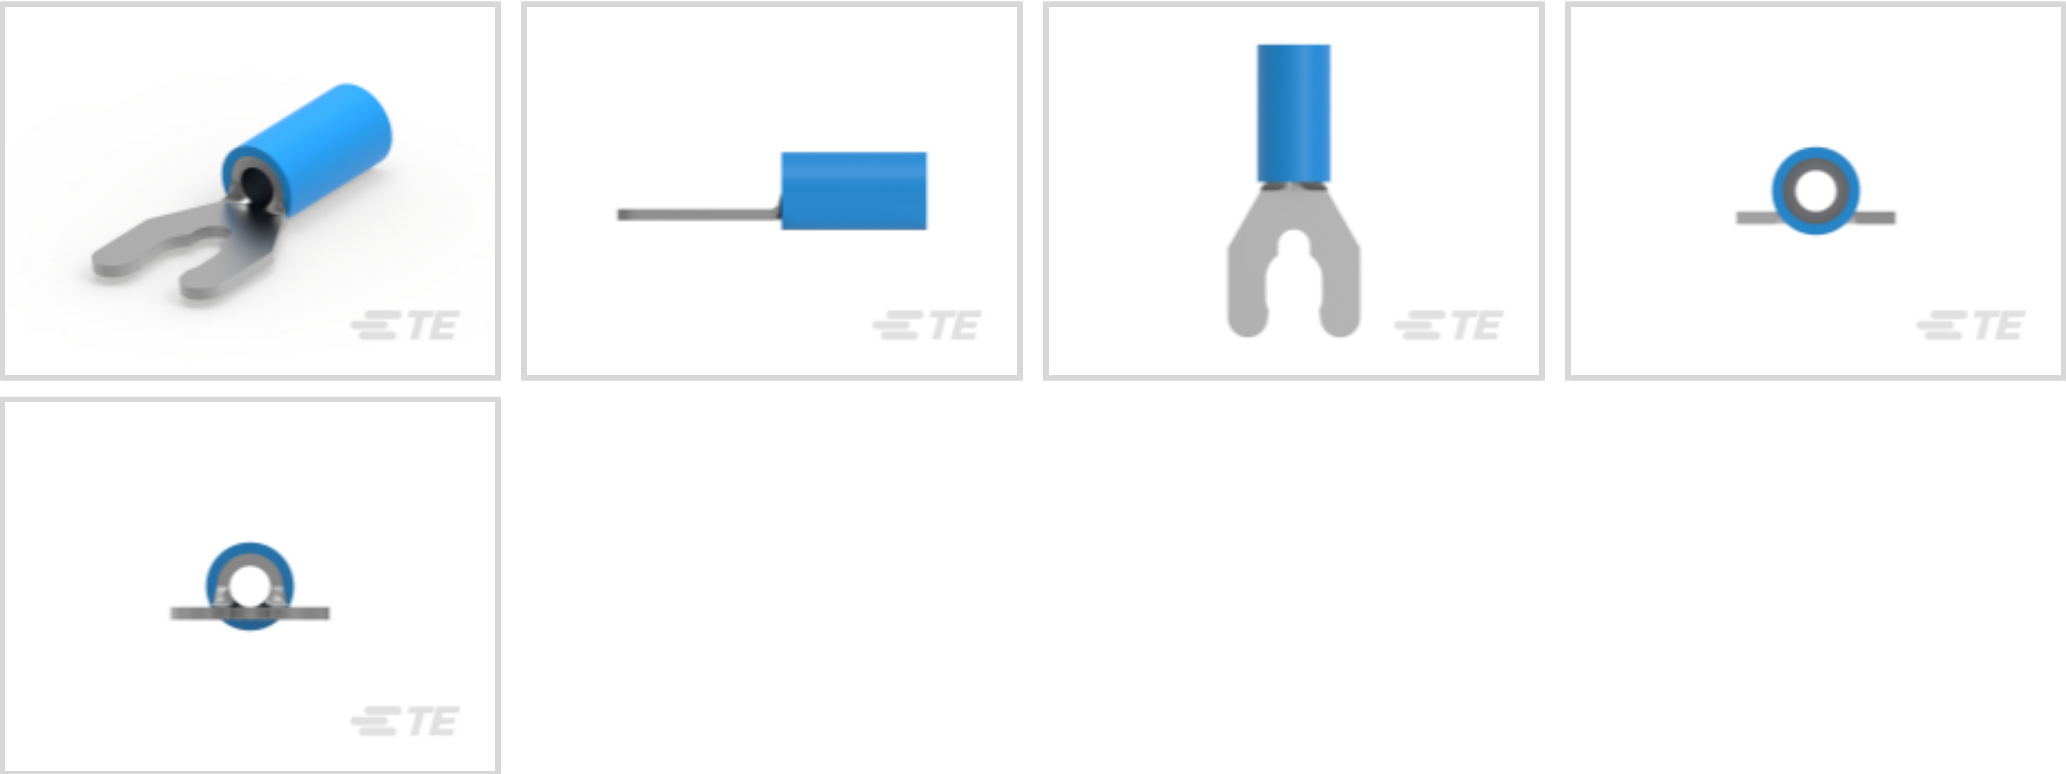

Spade Terminal Type: **Spring Spade Terminal**
Wire Size: **2050 – 5180 CMA**
Stud Size: **#10**

Features

Product Type Features

Terminal Features	Inspection Slot
Stud Size	#10
Sealable	No

Wire Insulation Support Retention Type	Insulation Support
--	--------------------

Electrical Characteristics

Voltage Rating	600 V
----------------	-------

Body Features

Insulation Sleeve Color	Blue
Stripe Color	Blue

Contact Features

Spade Terminal Type	Spring Spade Terminal
Barrel Type	Closed
Terminal Orientation	Straight
Terminal Plating Material	Tin

Mechanical Attachment



Wire Insulation Support	With
-------------------------	------

Dimensions

Wire Size	2050 – 5180 CMA
Stud Diameter	4.82 mm[.19 in]
Tongue Thickness	.79 mm[.031 in]
Product Length	23.39 mm[.92 in]
Compatible Insulation Diameter (Max)	4.9 mm[.193 in]
Compatible Insulation Diameter Range	3 – 4.9 mm[.118 – .193 in]

Usage Conditions

Insulation Option	Partially Insulated
Operating Temperature Range	105 °C[221 °F]

Operation/Application

Compatible With Wire Base Material	Copper
Compatible With Wire Plating Material	Tin

Industry Standards

Government Qualified Terminal	No
-------------------------------	----

Packaging Features

Packaging Quantity	1000
Packaging Method	Tape Mounted

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 58423-1
DIE, RBY IS9252

TE Part # 52957
TERMINAL,PG SPR SPD 16-14 10

TE Part # 59824-1
TETRA-CRIMP PIDG PG FASTON 22-10 ASSY

TE Part # 58433-3
PRO CR ASSY, RBY IS9252

TE Part # 47387
DAHT PG PIDG 20-14 ASSY

TE Part # 1SET133008R0000

Also in the Series | PLASTI-GRIP

Compression Connectors(3)

Crimp Wire Pins, Tabs & Ferrules(19)

Ring Terminals(300)

Spade Terminals(160)



Splices(46)

Customers Also Bought



TE Part #3-520151-2
ULTRAFAST 187 ASSY REC 16-14
TPBR LP



TE Part #52264-5
TERMINAL R PG 6 3/8



TE Part #2-34173-1
TERMINAL,PG R 12-10 3/8



TE Part #53241-2
PG SPR SPD 22-16COMM 22-18MIL8



TE Part #640416-2
BLADE TAB 250 18-14AWG TPBR




TE Part #1-1744416-0
10 POS EP II HSG, GLOW WIRE



TE Part #696049-1
PG 8 RING #8



TE Part #NB32776001
ATUM-6/2-0-50MM

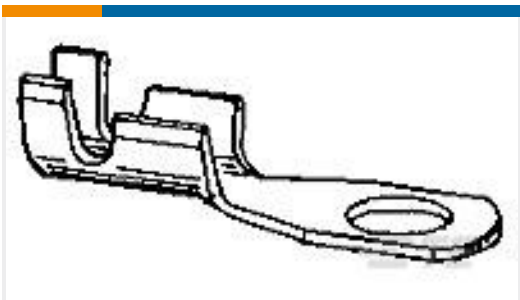

TE Part #140664
RECTANGULAR 112 18-14 .236 X .394
TPBR



TE Part #0830956003
RBK-85-NR5100/A-X-12MM

Documents

Product Drawings

TERMINAL,PG SPR SPD 16-14 10

English

CAD Files

Customer View Model

ENG_CVM_52957-1_N.3d_igs.zip

English

Customer View Model



[ENG_CVM_52957-1_N.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_52957-1_N.2d_dxf.zip](#)

English

3D PDF

English

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_52957-1_T.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_52957-1_T.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_52957-1_T.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English

Instruction Sheets

AMP* PIDG* (VINYL) & PLASTI-GRIP* SHORT SPRING SPADE TERMINALS FOR BAR

English

Instruction Sheet (U.S.)

English

Agency Approvals

UL Report

English