
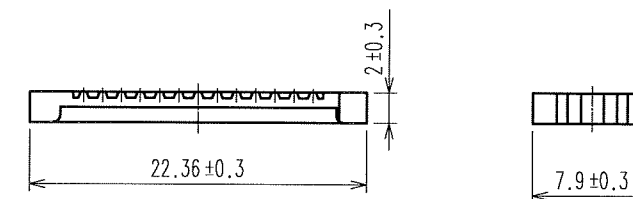

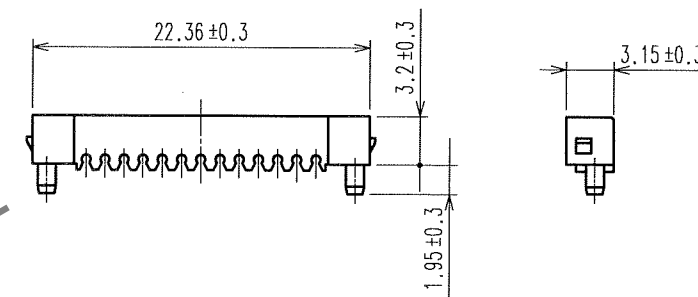



Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
▲	1	RE-E-4505	E.M	H.T	96.11.12	▲					.
▲	2	DIS-E-000197	Y.S	Y.E	05.08.29	▲					.
▲						▲					.

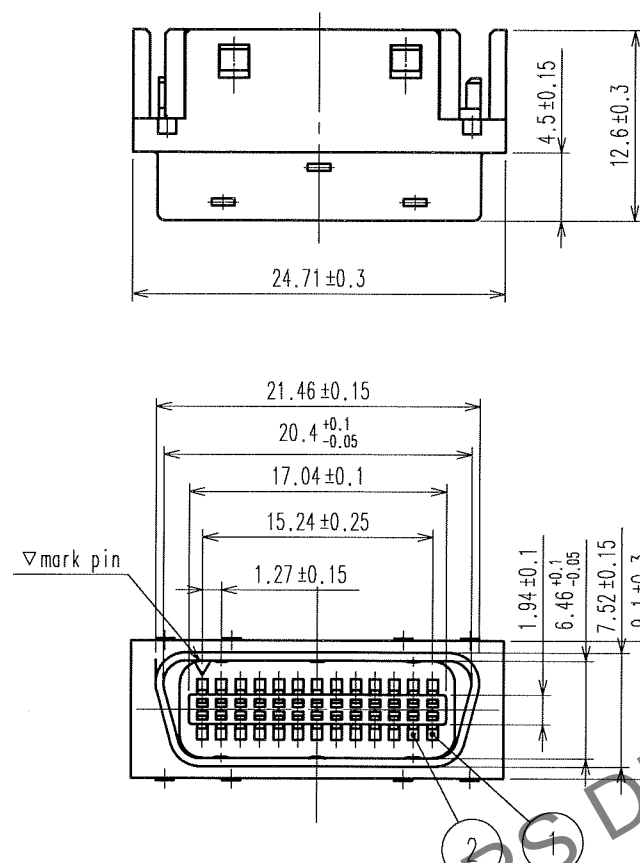

NOTE 1 REF.No. (3) RETENFORCE TO BE 100N MIN AT DIRECTION A.

4	PBT Resin	(Including glass)UL94V-0			
3	PBT Resin	(Including glass)UL94V-0	7	PBT Resin	(Including glass)UL94V-0
2	Beryllium copper	Contact section: Gold plated IDC Section: Gold flash plating 	6	PBT Resin	(Including glass)UL94V-0
1	Beryllium copper	Contact section: Gold plated IDC Section: Gold flash plating 	5	Steel	Nickel plated
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
	H.SHIMAZU 91.05.14	H.SHIMAZU 91.05.15	A.SUZUKI 91.05.15	A.NAKAZAWA 91.05.20	

 SCALE 2 : 1 UNITS mm	DRAWING NO.	PART NO.
	EDC3-042473  HIROSE ELECTRIC CO., LTD	DX30AM-26P CODE NO. CL230-5026-0