



目錄 MAPX	設 變 內 容 MODIFICATION	日 期 DATE
A0	NEW	09-10-20

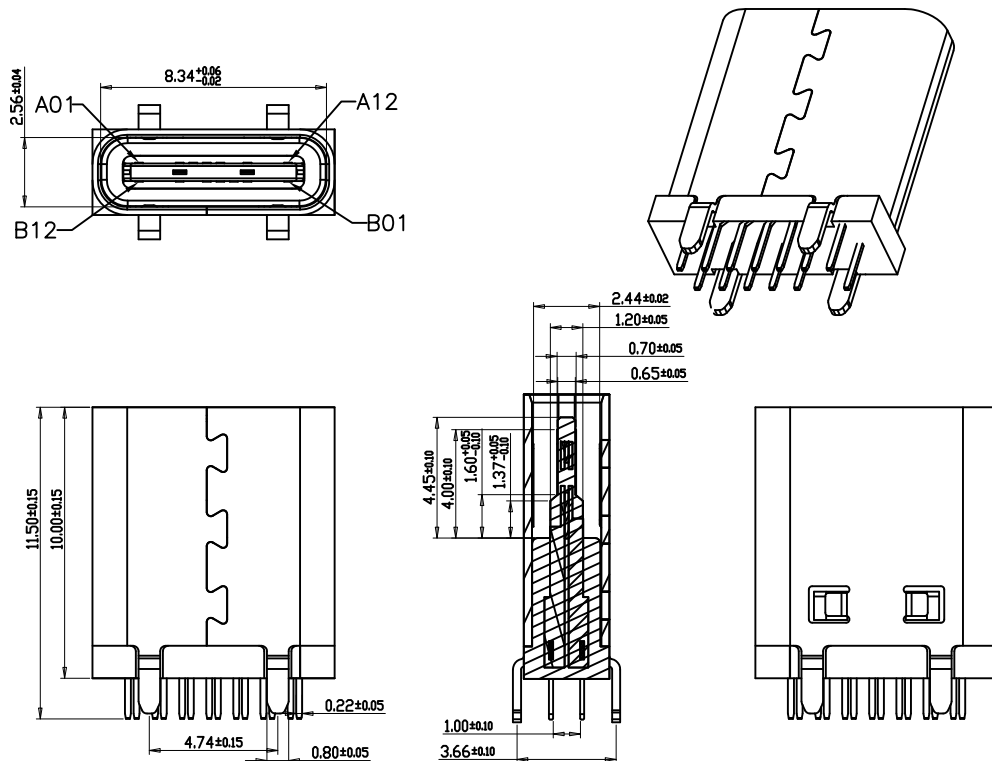

- SPECIFICATIONS:
- ELECTRICAL CHARACTERISTICS:
 - 1-1. CONTACT RESISTANCE: 30m Ω MAX.
 - 1-2. DIELECTRIC WITHSTANDING VOLTAGE: 100V AC FOR ONE MINUTE.
 - 1-3. INSULATION RESISTANCE: 100M Ω MIN. MEASURED BY 500 VDC
 - MECHANICAL CHARACTERISTICS:
 - 2-1. INSERTION FORCE :0.5-2.0KgF(REF.)
 - 2-2. WITHDRAWAL FORCE :0.8-2.0KgF(REF.)
 - LIFE TEST: 10,000 CYCLES.
 - TO CONFORM TO THE KRCINN HAZARDOUS SUBSTANCE FREE SPEC.

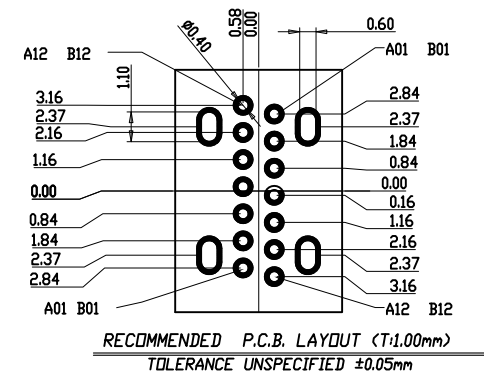

截面 1-1

6	SHELL	STAINLESS STEEL	Ni Plated	1PCS
5	SHIELDING PLATE	STAINLESS STEEL	---	1PCS
4	MD	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
3	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
2	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1		
A6	DP1	B7	DN2
A7	DN1	B6	DP2
		B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

产品图 PRODUCT CHART DWG			
公差一览表 TOLERANCE UNLESS OTHERWISE			
X.	$\pm$ 0.30	X'.	$\pm$ 5'
.X	$\pm$ 0.25	.X'	$\pm$ 2'
.XX	$\pm$ 0.30	.XX'	$\pm$ 1'
.XXX	$\pm$ 0.15	.XXX'	$\pm$ 0.5'

单位 UNITS	MM	制图 DRAWING	YANG	产品料号 PRODUCT PART NO.	918-468K2029E50001
比例 SCALE	1:1	审核 CHKD	郭治富	产品名称 PRODUCT NO.	TYPE-C3.1母座四脚直立式夹板
日期 DATE	2009/10/20	核准 APPD	黄国荣	角法 VIEW	间距1.0长度10.0LCP黑胶
				版本 VER	A0