

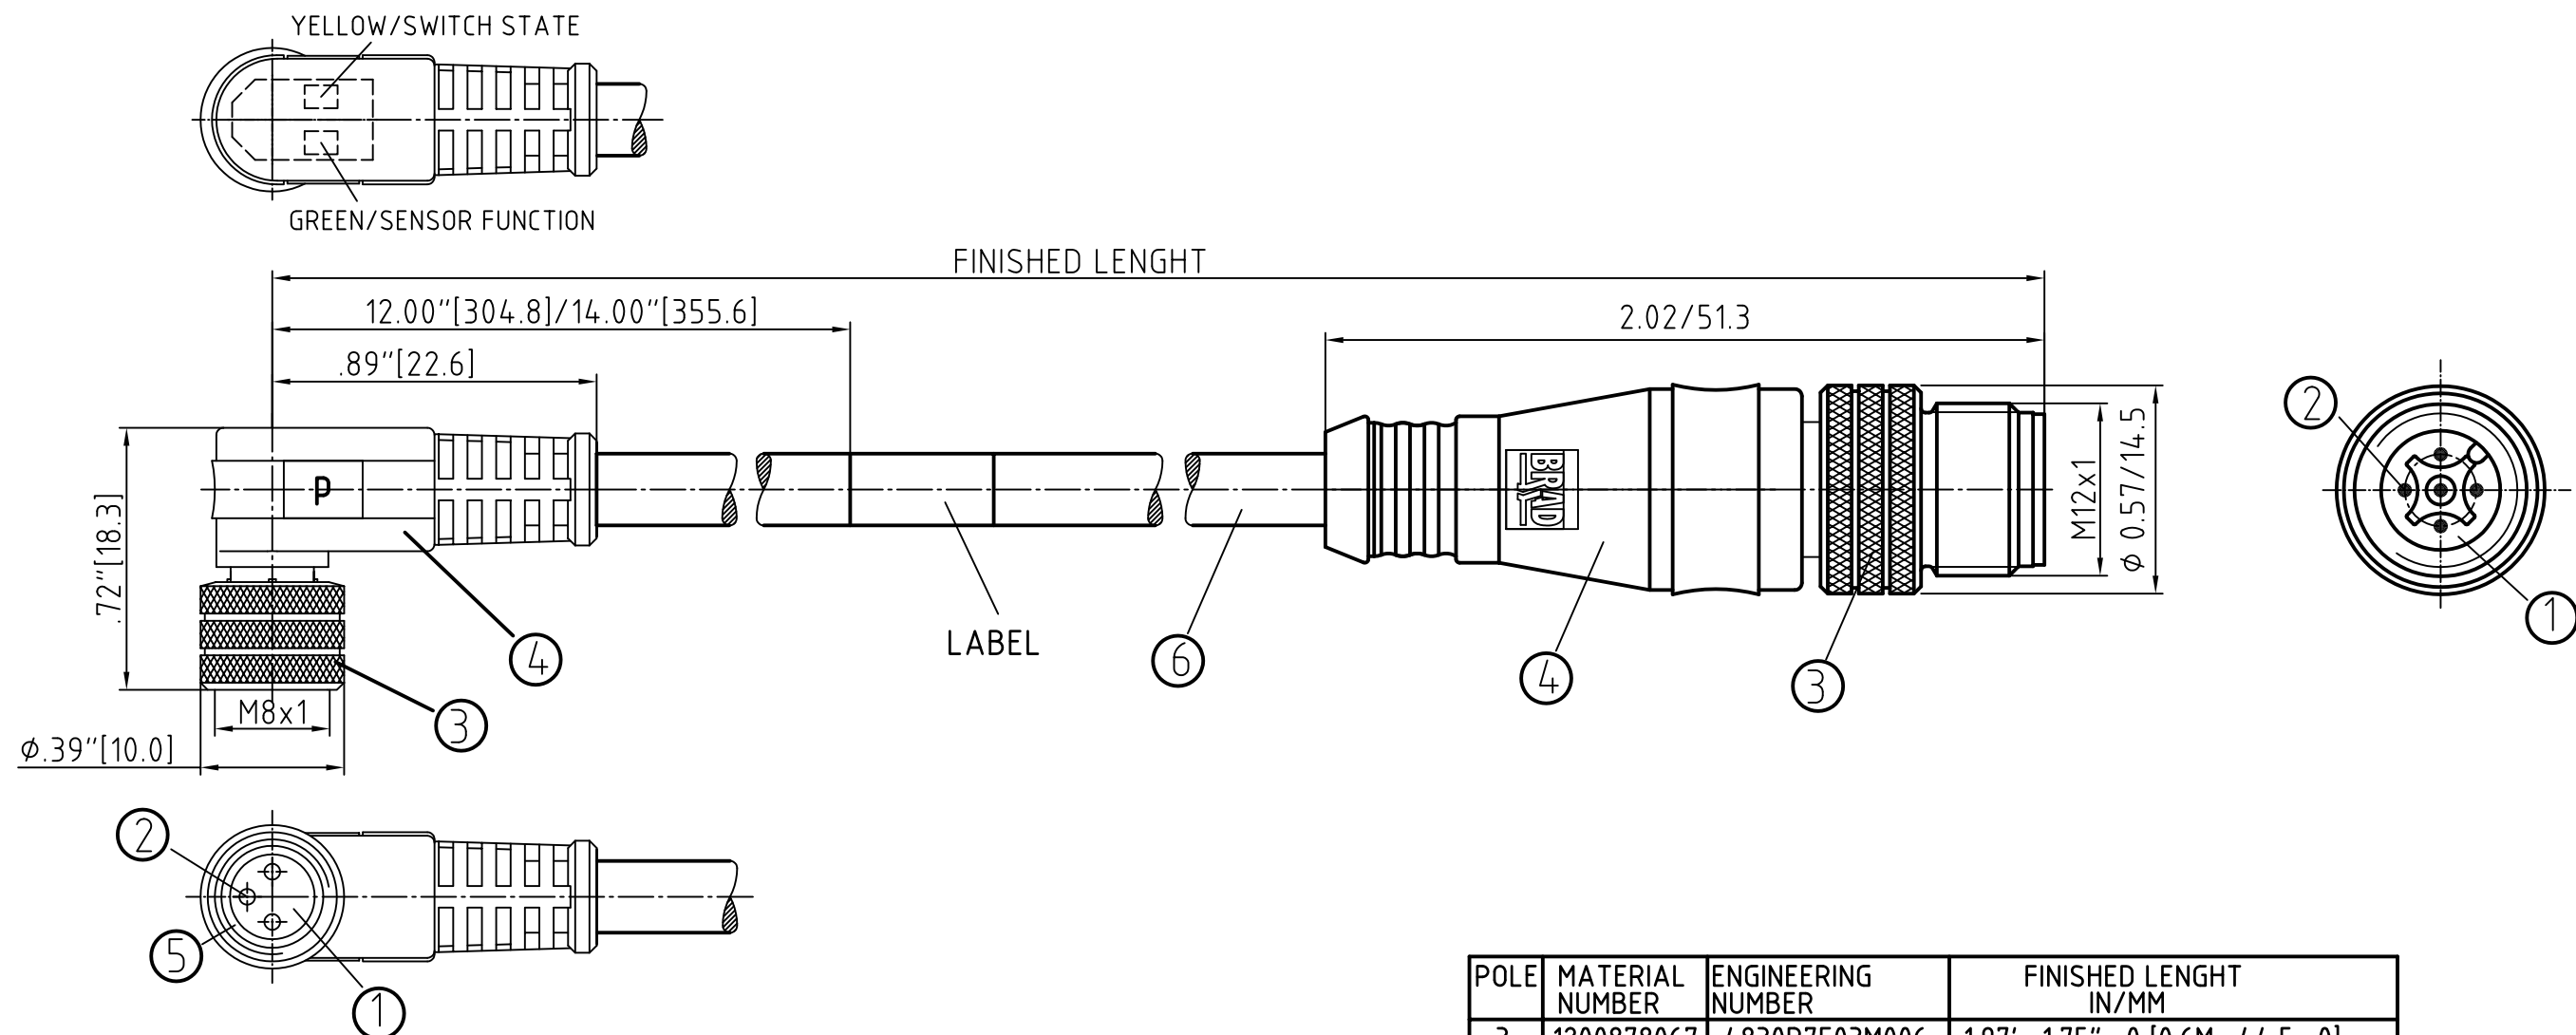


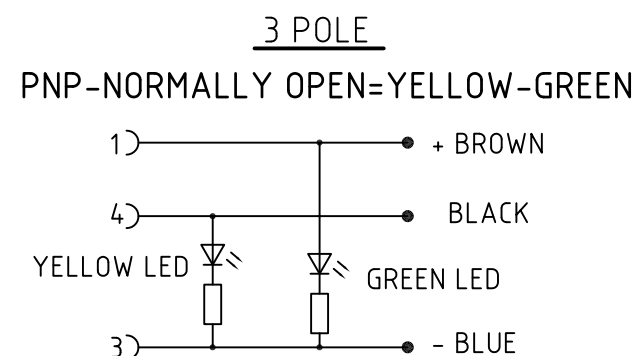

POLE	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGHT IN/MM
3	1200878067	4830P7E03M006	1.97' +1.75" -0 [0.6M +4.4.5 -0]

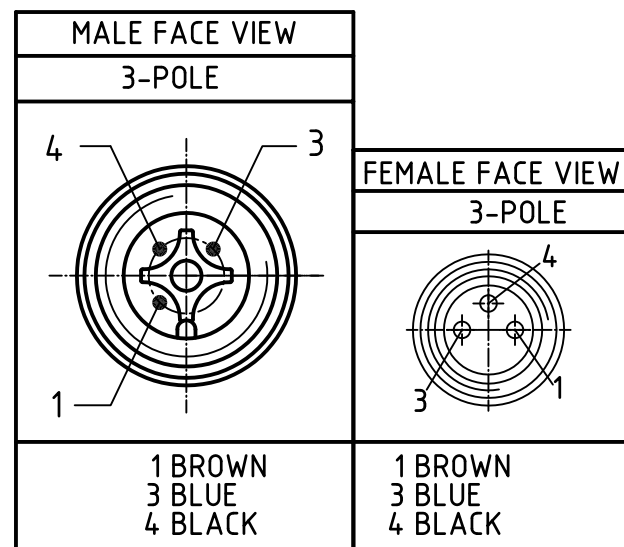

CONNECTOR SPECIFICATION:	
VOLTAGE RATING	10-30V/DC
AMPERAGE RATING	3 AMPS
PROTECTION	IP68
OPERATING TEMPERATURE	-30°C TO +80°C
UL CERTIFICATIONS	UL listed, File #E152210
CSA CERTIFICATIONS	CSA CERTIFIED, File LR6837

ITEM	COMPONENT	MATERIAL	FINISH
1	INSERT	POLYURETHANE (PUR)	BLACK
2	CONTACT SOCKET	COPPER ALLOY	GOLD OVER NICKEL
3	COUPLING NUT	BRASS	NICKEL PLATED
4	MALE/OVERMOLD	TPU	YELLOW
4	FEMALE/OVERMOLD	PVC	CLEAR
5	O-RING	VITON	
6	CABLE 0.25mm ² /24AWG, (COPPER STRANDING) 3 CONDUCT. 300V	JACKET:PVC	BLACK

DESCRIPTION EC NO: WEU2010-0330 DRWN: REISSNER 2010/02/04 CHKD: FP APPR: NSTAUDIG 2010/02/11		DESCRIPTION	QUALITY SYMBOLS ▽ = 0 C = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
					mm	INCH	DRAWN BY DATE REISSNER 2010/02/04	NC/MIC 3P F/M 90/ST AWG 24 PVC ----				
				4 PLACES	±---	±---	CHECKED BY DATE FP 2010/02/04					
				3 PLACES	±---	±---	APPROVED BY DATE NSTAUDIG 2010/02/10	molex MOLEX INCORPORATED				
				2 PLACES	±---	±.01	MATERIAL NO. SEE TABLE					DOCUMENT NO. SD-120087-022
				1 PLACE	±0.3	±---	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
ANGULAR ± --- °												
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS												
1		REV										