
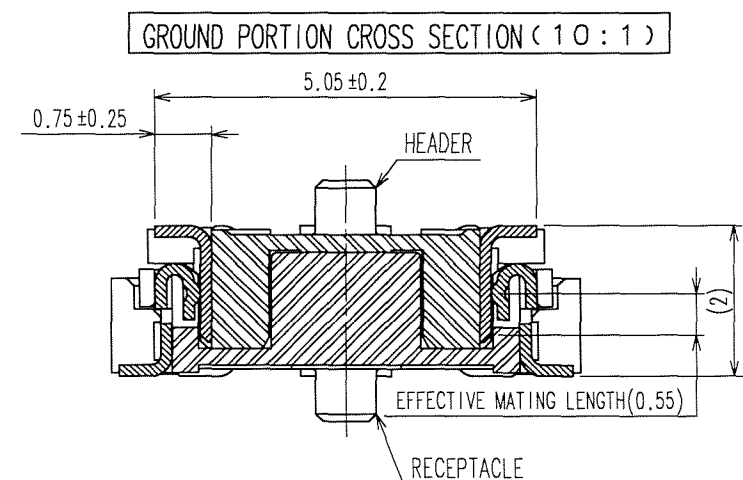
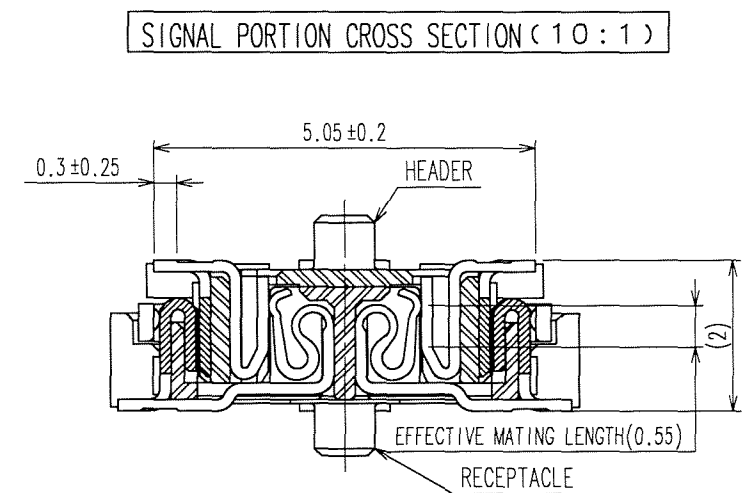


	COUNT	DESCRIPTION OF REVISIONS	B Y	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	B Y	CHKD	DATE
△					. .	△					. .
△					. .	△					. .
△					. .	△					. .

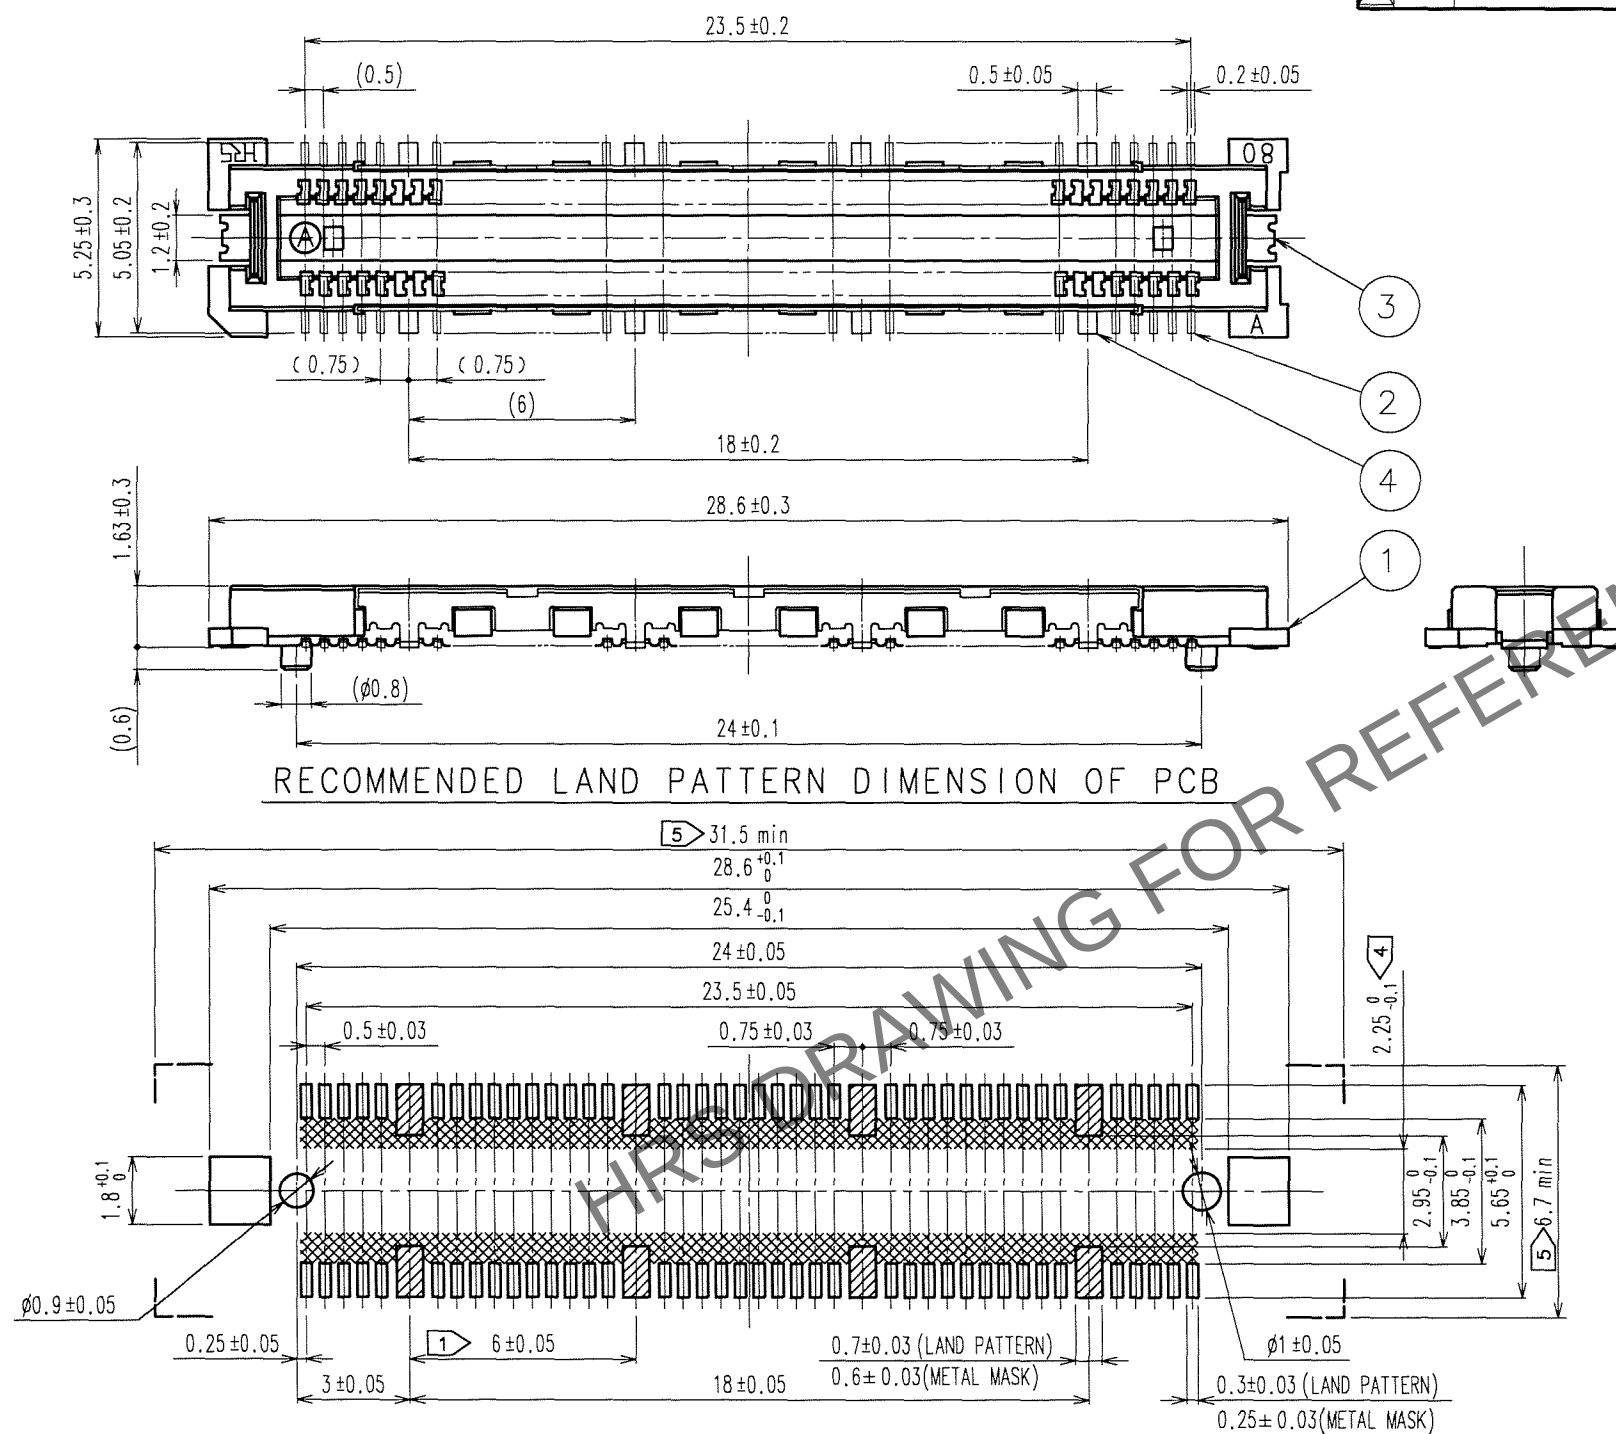

- NOTES ① 8 HATCHED  PARTS:GROUND CIRCUIT.
2 SMT LEAD-COPLANARITY:0.1 MAX.
3 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
④ MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND ,OR
LEAD MAY TOUCH PATTERN.(THIS APPLIES TO HATCHED  AREA.)
⑤ DO NOT MOUNT OTHER DEVICES ONTO   AREA ,OR MATING PAIR
CANNOT BE MATED.
6 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

4	PHOSPHOR BRONZE	TIN-PLATING	2	COPPER ALLOY	CONTACT AREA:GOLD 0.1 μ m min.		
3	PHOSPHOR BRONZE	TIN-PLATING			LEAD AREA:GOLD FLASH		
1	LCP	BEIGE UL94V-0			UNDER PLATING:NICKEL 1μ m min.		
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS		
CODE NO.(OLD) CL			DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
			K.NAKAMURA 06.04.25	K.NAKAMURA 06.04.25	K. Ozawa 06.04.25	H. Okawa 06.04.26	
		DRAWING NO. EDC3-152093-25		PART NO. FX11LA-80P/8-SV(71)			
SCALE 5 : 1		 HIROSE ELECTRIC CO.,LTD.		CODE NO. CL573-0003-0-71			
UNITS mm				1 1			