

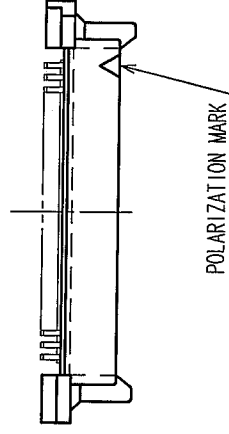
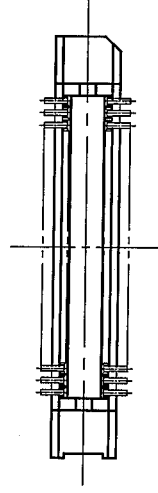
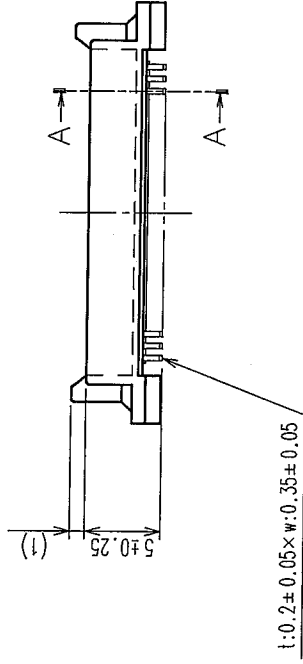
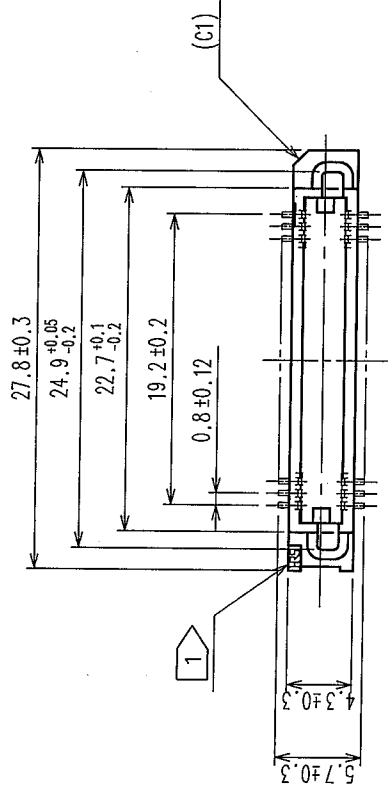


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE

A-A (10:1)

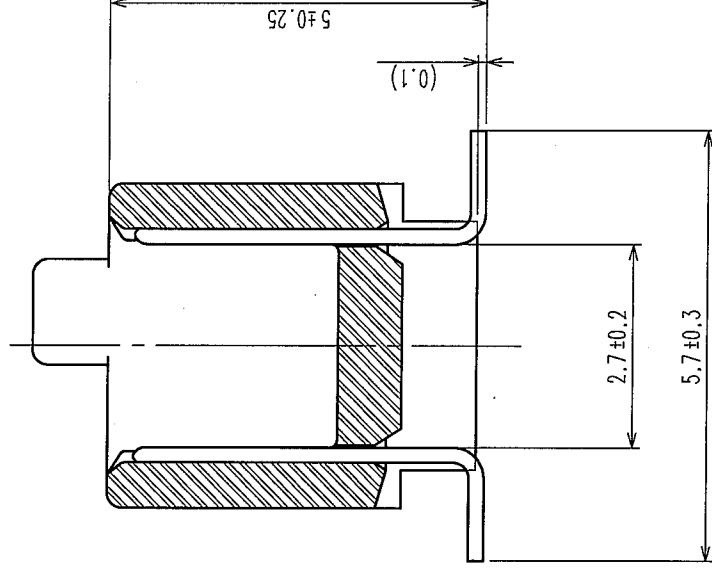

RECOMMENDED P.C.B. LAND PATTERN (MOUNT SIDE)

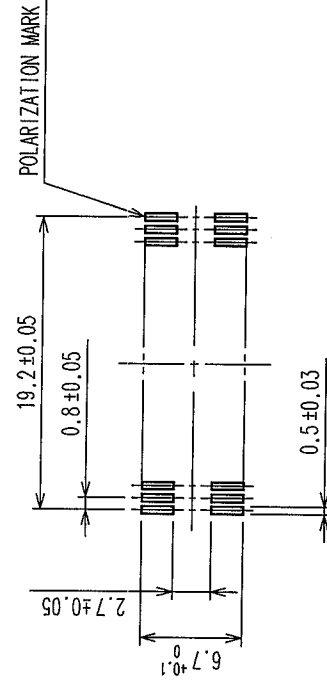

- NOTE
- 1 HRS MARK SHALL BE OPTIONAL.
 - 2 LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
 - 3 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
 - 4 EMBOSSED CARRIER TAPE PACKAGING SHALL BE APPLIED FOR THIS PRODUCT.
 - 5 FOR MODIFICATION, ETC, PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED ACCORDING TO CIRCUMSTANCES.

1	POLYPHENYLENE SULFIDE	LIGHT BROWN	UL94V-0	2	PHOSPHOR BRONZE	CONTACT AREA : GOLD 0.1μm min. LEAD AREA : TIN-PLATING 1μm min. UNDER PLATING : NICKEL 1μm min.	
NO.	MATERIAL	FINISH, REMARKS		NO.	MATERIAL	FINISH, REMARKS	
CODE NO. (OLD) CL		DRAWN Y. AOYAGI '05.09.15		DESIGNED Y. Aoyagi '05.09.26		CHECKED Y. Aoyagi '05.09.26	
SCALE 2 : 1		DRAWING NO. EDC3-071643-22		PART NO. FX6A-50P-0.8SV1(92)		APPROVED Y. Aoyagi '05.09.26	
UNITS mm		HIROSE ELECTRIC CO., LTD		CODE NO. CL576-0224-8-92		RELEASED	

