

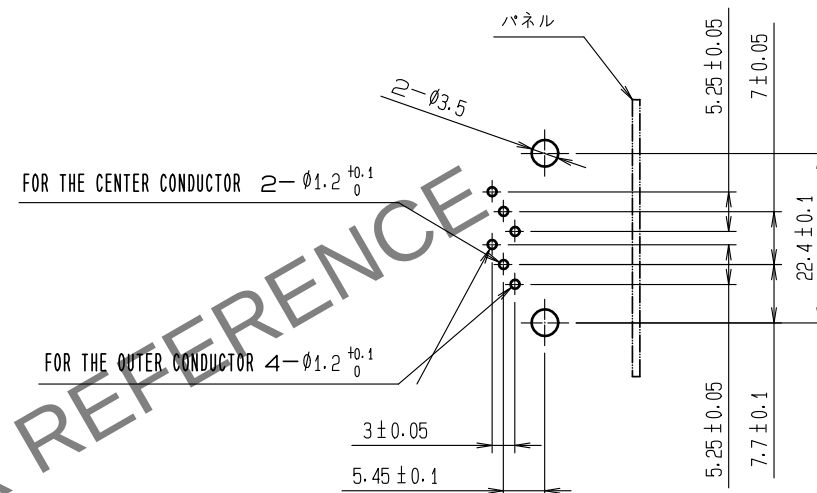
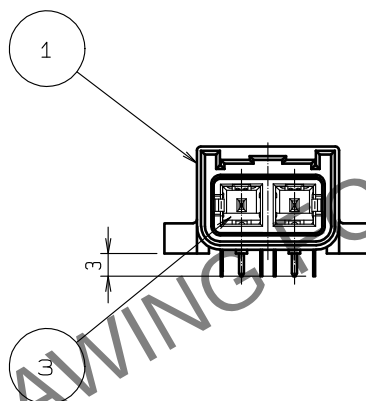


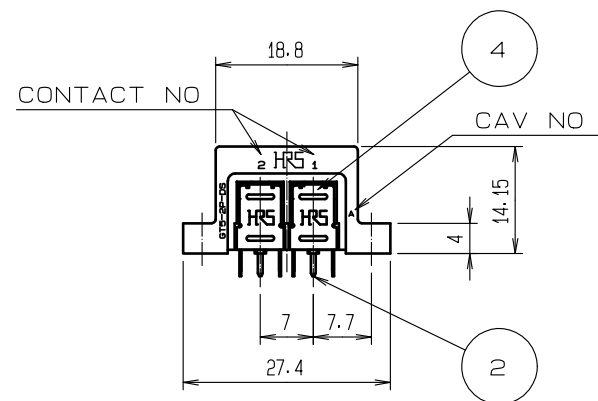


Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


ELV, RoHS COMPLIANT



RECOMMENDED PC BOARD HOLE PATTERN

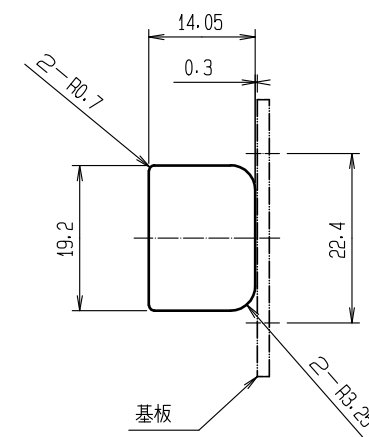

RECOMMENDED PANEL CUTOUT

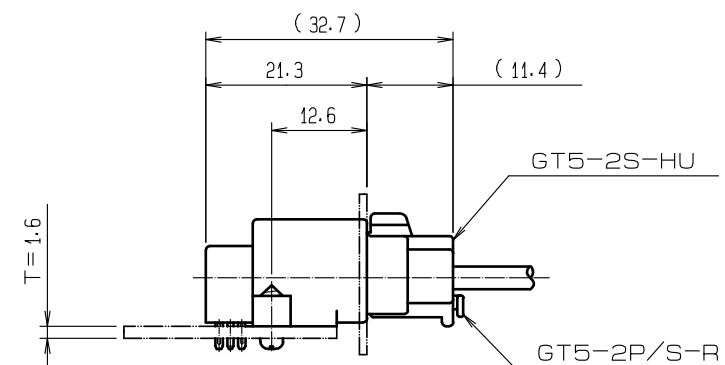

MATED CONNECTORS

- NOTE1. DEPENDING ON THE CIRCUMSTANCES, RECESS OF WELDING SHALL BE ADDED TO MOLD TO PREVENT SINKAGE.
- △ 2. FIXING SCREW SHALL BE NOMINAL DIAMETER 3mm, LENGTH 6mm IN ACCORDANCE WITH CLASS 1 OR 4 OF JIS B1115, 1112. DO NOT USE ANY SCREWS OTHER THAN THE RECOMMENDED ONES.
- △ 3. INSTALL THE SCREWS PERPENDICULARLY TO THE BOARD.

2	BRASS	TIN PLATED	4	PHOSPHOR BRONZE	TIN PLATED
1	PBT	UL94HB LIGHT GRAY	3	PBT	UL94V-0 DARK GRAY
部番	材 質	処 理 , 備 考	部番	材 質	処 理 , 備 考
UNITS mm		SCALE 1 : 1	△の数 2	訂 正 記 事 DIS-T-00008754	設 計 KN. MIKAMI
HIROSE ELECTRIC CO., LTD.		承 認 : KS. SATOH	20060113	図 番 : EDC3-165326-01	年 月 日 20210326
		検 図 : KS. SATOH	20060113	製 品 名 : GT5-2P-DS(70)	
		設 計 : TS. KUBOTA	20060113	製 品 コード CL0755-0043-9-70	
		製 図 : TS. KUBOTA	20060113		