
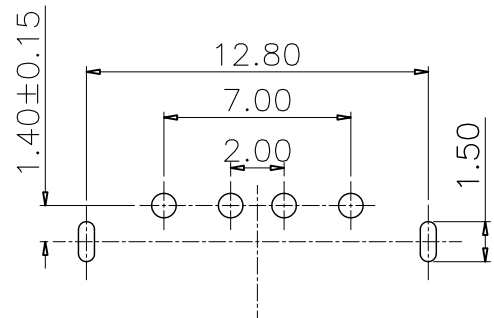


由Autodesk教育版产品制作



由Autodesk教育版产品制作

MAPX	MODIFICATION	DATE

- NOTES:
- 1. HOUSING: SEE NOTES,
 - TERMINAL: SEE NOTES.
 - SHELL: SEE NOTES.
- SPECIFICATION:
- 1. ELECTRICAL CHARACTERISTIC:
CONTACT RESISTANCE: 30MΩ MAX
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
INSULATION RESISTANCE: 1000MΩ MIN
 - 2. MECHANICAL CHARACTERISTIC:
INSERTION FORCE: 35N(3.57KGF) MAX
EXTRACTION FORCE: 10~35N(1.02~3.57KGF) MIN
DURABILITY: 1500 CYCLES EXTRACTION FORCE:10~35N
5000 CYCLES MIN
5000 CYCLES EXTRACTION FORCE:3~35N
 - 3. ENVIRONMENTAL:
OPERATING TEMPERATURE: -55℃+85℃
 - 4. Contact finish:
01:Selective Gold Flash
02:Selective Gold 3U"
03:Selective Gold 5U"
04:Selective Gold 15U"
05:Selective Gold 30U"

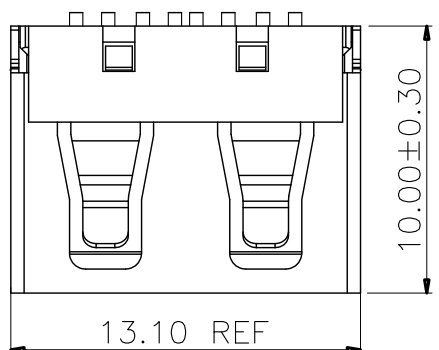

PCB HOLES(THE PATTERN SIDE) t=1.6mm
NOTE: GENERAL TOLERANCE: ±0.1mm

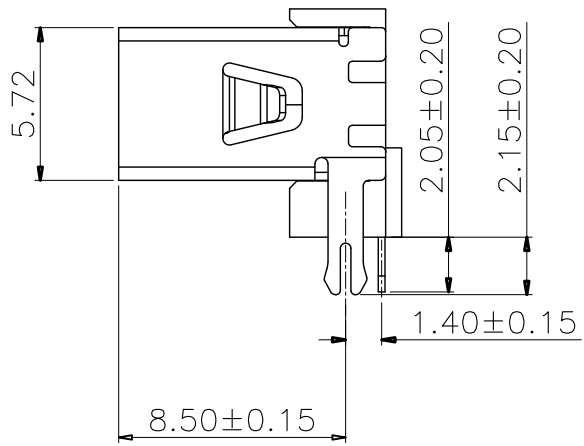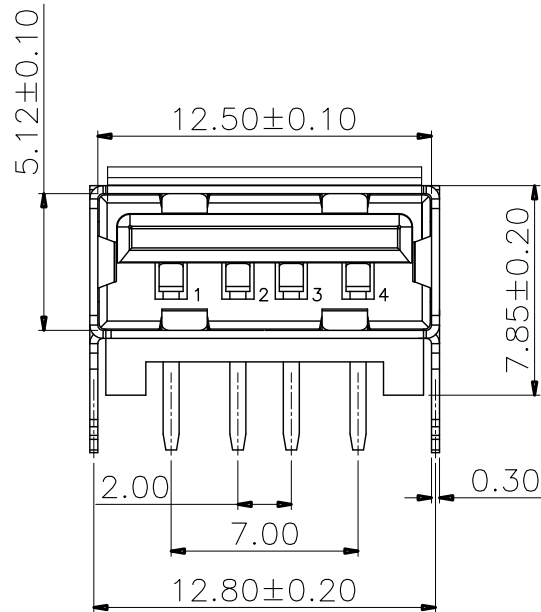

产品图 PRODUCT CHART DWG				深圳市精拓金电子有限公司					
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	Z-Y-B	制图料号 PRODUCT PART NO.	909-261A1015D10100
X	±0.25	X	±5.°	比例 SCALE	1:1	审核 CHKD		产品名称 PRODUCT NAME	AF10.0B 款后两脚无边铁壳PBT白胶
.X	±0.20	.X	±2.°	日期 DATE	2015.02.04	核准 APPD		角法 VIEW	7.8DIP无耳朵
.XX	±0.15	.XX	±1.°					版本 VER	AO
.XXX	±0.10	.XXX	±0.5°						

由Autodesk教育版产品制作