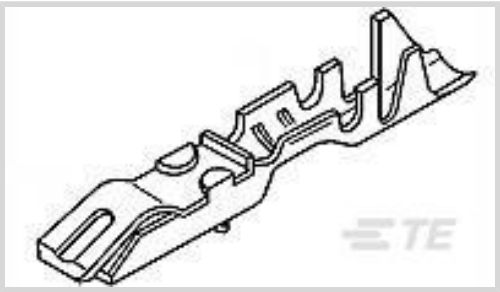




Connectors > Contacts > Connector Contacts



Contact Type: **Socket**

Contact Mating Area Plating Material: **Tin**

Wire Contact Termination Area Plating Material: **Tin**

Operating Voltage: **250 VAC**

Contact Retention Within Housing: **With**

Features

Product Type Features

Discrete Wire Type	Stranded
--------------------	----------

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
-----------------------------------	---------------

Electrical Characteristics

Termination Resistance	12 mΩ
Insulation Resistance	5000 MΩ
Dielectric Withstanding Voltage (Max)	750 V
Operating Voltage	250 VAC

Contact Features

Mating Square Post Dimension	.64 mm[.025 in]
Contact Underplating Material Thickness	1.27 μm[50 μin]
Contact Mating Area Plating Material Thickness	2.54 μm[100 μin]
Contact Shape & Form	Square
Contact Length	14.83 mm[.584 in]
Contact Orientation	Straight
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Tin
Barrel Type	Open



Contact Type	Socket
Contact Mating Area Plating Material	Tin
Wire Contact Termination Area Plating Material	Tin
Contact Retention Within Housing	With
Contact Base Material	Phosphor Bronze
Contact Current Rating (Max)	3 A

Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire & Cable

Mechanical Attachment

Wire Insulation Support	With
Contact Retention Type Within Housing	Spring

Dimensions

Compatible Insulation Diameter Range	.97 – 1.57 mm[.038 – .062 in]
Wire Size	1021 CMA

Usage Conditions

Operating Temperature Range	-65 – 105 °C[-85 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Signal
---------------------	--------

Industry Standards

Compatible With Approved Standards Products	CSA LR7189, UL E28476
---	-----------------------

Packaging Features

Packaging Quantity	7000
Packaging Method	Reel

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241)



Candidate List Declared Against: JUNE 2024 (241)
SVHC > Threshold:
Pb (13% in Component Part)




Article Safe Usage Statements:
Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

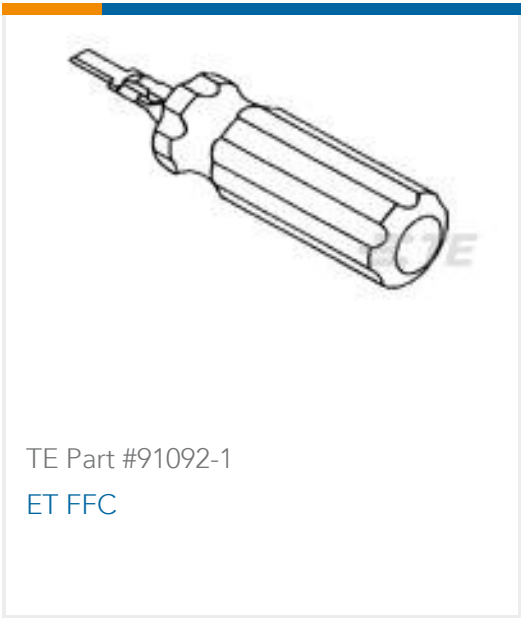
Compatible Parts

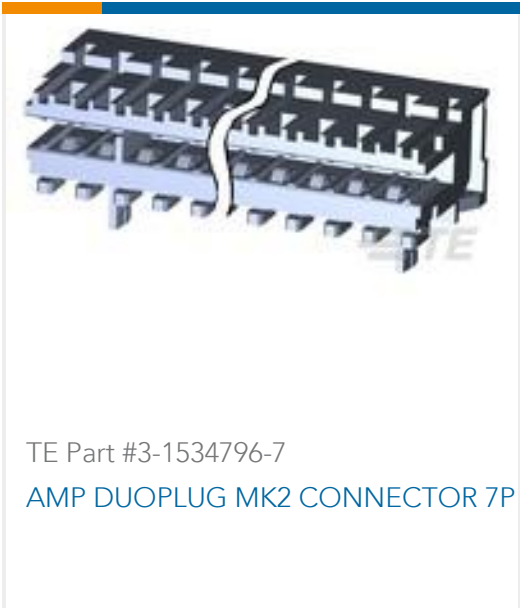
 TE Part # 87175-2 01 LOCKING CLIP HSG SR .100CL	 TE Part # 87133-1 04 LOCKING CLIP HSG DR .100CL	 TE Part # 926657-6 LOCKING CLIP HSG	 TE Part # 926657-3 3P LOCKG CLIP GEH
 TE Part # 926657-4 LOCKING CLIP HSG	 TE Part # 1-87175-0 04 LOCKING CLIP HSG SR .100CL	 TE Part # 926209-3 LOCKING CLIP HSG.	 TE Part # 1-87175-7 08 LOCKING CLIP HSG SR MRKD



 TE Part # 87133-9 08 LOCKING CLIP HSG DR .100CL	 TE Part # 926010-1 LOCKING CLIP HSG	 TE Part # 1-87175-2 05 LOCKING CLIP HSG SR .100CL	 TE Part # 87133-2 10 LOCKING CLIP HSG DR .100CL
 TE Part # 926209-5 LOCKING CLIP HSG.	 TE Part # 1-87133-1 12 LOCKING CLIP HSG DR .100CL	 TE Part # 1-87175-4 06 LOCKING CLIP HSG SR .100CL	 TE Part # 1-87175-8 08 LOCKING CLIP HSG SR .100CL
 TE Part # 2-87175-2 10 LOCKING CLIP HSG SR .100CL	 TE Part # 926209-4 2X4P LOCK-CLIP GEH	 TE Part # 926657-5 5P LOCKG CLIP GEH	 TE Part # 87133-5 10 LOCKING CLIP HSG DR MRKD

Customers Also Bought

 TE Part #6787634001 ZH-100-3/8-0-SP	 TE Part #1-1670990-1 10POS MQS REC COD A	 TE Part #770902-3 MINI UMNL SOK 26-22 AWG AU	 TE Part #867052-2 LOCKING CLIP CONT ASSY .025 SQ
 TE Part #1-967627-5 FLACHSTE-GEH2,8 12P	 TE Part #91092-1 ET FFC	 TE Part #347713-1 2.0MM CABLE SEAL HC SILIC	 TE Part #9-1768017-1 EET-0820G-4



Documents

Product Drawings

LOCKING CLIP CONT ASSY .025 SQ

English

CAD Files

3D PDF

English

Customer View Model

ENG_CVM_5-867052-1_Z.2d_dxf.zip

English

Customer View Model

ENG_CVM_5-867052-1_Z.3d_igs.zip

English

Customer View Model

ENG_CVM_5-867052-1_Z.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages

AMPMODU_INTERCONNECTION_SYSTEM_SECTION5_CONT

English

Product Specifications

Product Specification

English

Connector, Locking Clip, .025 Square

English