

Actuator

17-000351

Distribution by
DigiKey**DigiKey**<https://digikey.eao.com/p/17-000351>

Your product:



17-000351 Actuator

FRONT

Front dimension:	Ø 7 mm
Front form:	round
Reflector:	Metal, polished chromium-plated, flat top LED

MOUNTING

Mounting cut-out:	Ø 6 mm
Design:	raised

OPERATING-/INDICATION PART

Illumination colour:	Green
----------------------	-------

ELECTRICAL CHARACTERISTICS

Operating voltage:	24 V AC/DC ± 10 %
Operation current:	15 mA ± 15 %
Polarity:	Anode (+) Brass plug-in connector Cathode (-) Brass tinned plug-in connector
Lumi. Intensity:	6 mcd

MECHANICAL CHARACTERISTIC

Terminal:	Plug-in terminal, 2 x 0.5 mm
Tightening torque:	Fixing nut max. 0.2 Nm
Weight:	0.003 kg

AMBIENT CONDITION

Operating temperature:	– 20 °C ... + 60 °C
IP Protection:	IP40 front side, IP65 front side, according to IEC 60529
Storage temperature:	– 25 °C ... + 80 °C


CERTIFICATE

Approbations:	UL
Conformities:	2011 / 65 / EC (RoHS), 2014 / 35 / EU (230 VAC)


OTHER

Kind of illumination:	Single-LED
Short Description:	Actuator, Ø 6 mm, Ø 7 mm, round, Plug-in terminal, 2 x 0.5 mm, Green
Hints:	Connectors: Brass terminal = anode (+); brass tinned terminal = cathode (-), IP67 front side gap between LED and reflector and gap between reflector and frontplate sealed to IP67 when using the supplied gasket., The plastic is limited resistant to chemicals.


Wiring diagrams:

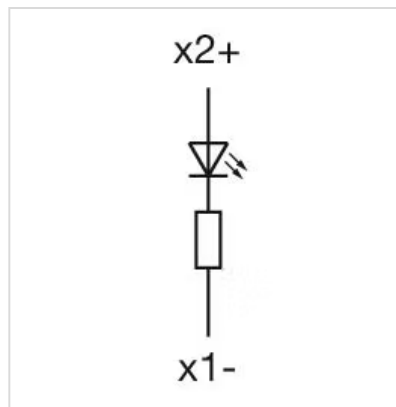

Mounting cut-outs:

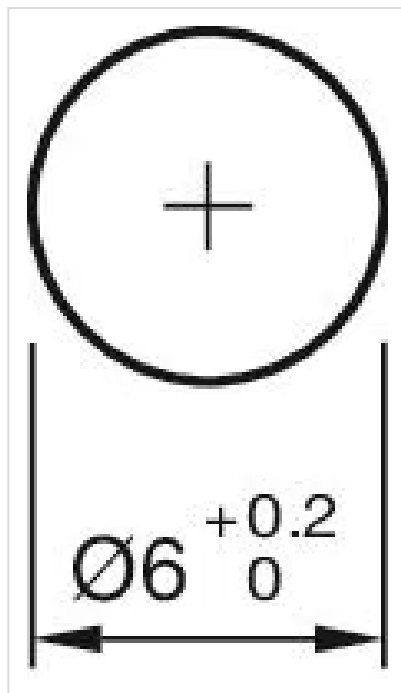

Dimension drawings:

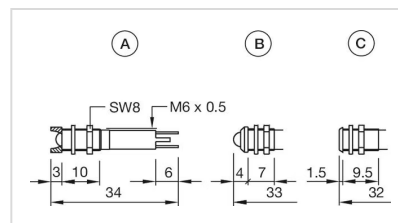

A = interior
B = exterior
C = superflat