
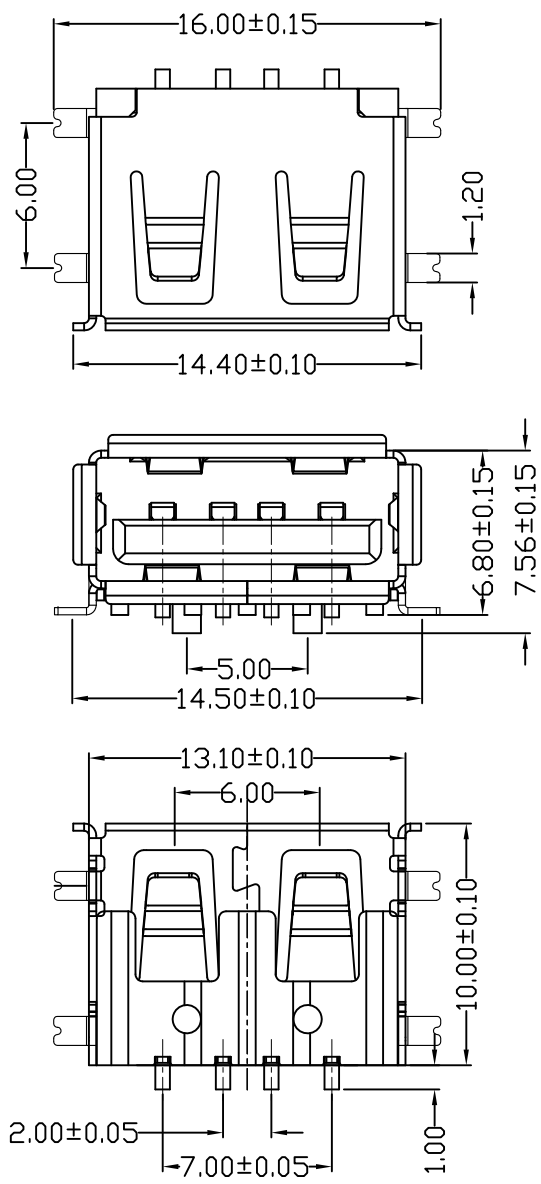


NOTES:
1.HOUSING: SEE NOTES, UL94V-0 .
TERMINAL: SEE NOTES.
SHELL: SEE NOTES.

SPECIFICATION:
1.ELECTRICAL CHARACTERISTIC:
CONTACT RESISTANCE: $30M\Omega$ MAX
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
INSULATION RESISTANCE: $1000M\Omega$ MIN
2.MECHANICAL CHARACTERISTIC:
INSERTION FORCE: 35N(3.57KGF) MAX
EXTRACTION FORCE: 10~35N(1.02~3.57KGF)MIN
DURABILITY: 1500 CYCLES EXTRACTION FORCE:10~35N
5000 CYCLES MIN
5000 CYCLES EXTRACTION FORCE:3~35N

3.ENVIRONMENTAL:
OPERATING TEMPERATURE: $-55^{\circ}C+85^{\circ}C$

4.Contact finish:
01:Selective Gold Flash
02:Selective Gold 3U"
03:Selective Gold 5U"
04:Selective Gold 15U"
05:Selective Gold 30U"

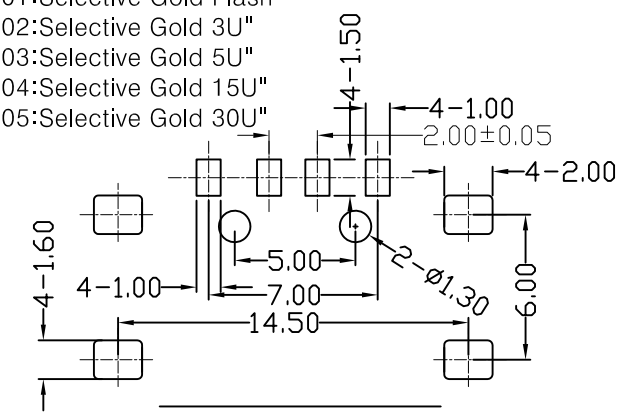

FRONT EDGE OF CONNECTOR
PCB LAYOUT

产品图 PRODUCT CHART DWG				深圳市精拓金电子有限公司					
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	Z-Y-B	制图料号 PRODUCT PART NO.	915-112B2028S10101
X.	± 0.25	X.	$\pm 5^{\circ}$	比例 SCALE	1:1	审核 CHKD		产品名称 PRODUCT NAME	AF10.0短体四脚全贴有边方弹铜壳反向LCP黑胶6.8有柱
.XX	± 0.15	.XX	$\pm 1^{\circ}$	日期 DATE	2013.04.24	核准 APPD		角法 VIEW	
.XXX	± 0.10	.XXX	$\pm 0.5^{\circ}$					版本 VER	AD