


## FEATURES

- ┆ Planar Die Construction
- ┆ 300mW Power Dissipation
- ┆ Zener Voltages from 2.4V - 39V
- ┆ Ultra-Small Surface Mount Package Power Dissipation

**SOT-23**



## MAXMUM RATINGS( $T_a=25^{\circ}\text{C}$ unless otherwise specified )

| Characteristic                                   | Symbol          | Value    | Unit                 |
|--------------------------------------------------|-----------------|----------|----------------------|
| Forward Voltage (Note 2) @ $I_F = 10\text{mA}$   | $V_F$           | 0.9      | V                    |
| Power Dissipation(Note 1)                        | $P_d$           | 300      | mW                   |
| Thermal Resistance from Junction to Ambient      | $R_{\theta JA}$ | 417      | $^{\circ}\text{C/W}$ |
| Operation Junction and Storage Temperature Range | $T_J, T_{stg}$  | -55~+150 | $^{\circ}\text{C}$   |

### ELECTRICAL CHARACTERISTICS

**T =25℃ unless otherwise specified**


| Number    | Marking | Zener Voltage Range |        |        |          | Zener Impedance   |                   |          | Reverse Current |       | Typical Temperature Coefficient |      |
|-----------|---------|---------------------|--------|--------|----------|-------------------|-------------------|----------|-----------------|-------|---------------------------------|------|
|           |         | $V_Z @ I_{ZT}$      |        |        | $I_{ZT}$ | $Z_{ZT} @ I_{ZT}$ | $Z_{ZK} @ I_{ZK}$ | $I_{ZK}$ | $I_R$           | $V_R$ | @ $I_{ZT}=5\text{ mA}$<br>mV/℃  |      |
|           |         | Nom(V)              | Min(V) | Max(V) | mA       | Ω                 |                   | mA       | μA              | V     | Min                             | Max  |
| BZX84B2V4 | 2Z11    | 2.4                 | 2.35   | 2.45   | 5        | 100               | 600               | 1.0      | 50              | 1.0   | -3.5                            | 0    |
| BZX84B2V7 | 2Z12    | 2.7                 | 2.65   | 2.75   | 5        | 100               | 600               | 1.0      | 20              | 1.0   | -3.5                            | 0    |
| BZX84B3V0 | 2Z13    | 3                   | 2.94   | 3.06   | 5        | 95                | 600               | 1.0      | 10              | 1.0   | -3.5                            | 0    |
| BZX84B3V3 | 2Z14    | 3.3                 | 3.23   | 3.37   | 5        | 95                | 600               | 1.0      | 5               | 1.0   | -3.5                            | 0    |
| BZX84B3V6 | 2Z15    | 3.6                 | 3.53   | 3.67   | 5        | 90                | 600               | 1.0      | 5               | 1.0   | -3.5                            | 0    |
| BZX84B3V9 | 2Z16    | 3.9                 | 3.82   | 3.98   | 5        | 90                | 600               | 1.0      | 3               | 1.0   | -3.5                            | 0    |
| BZX84B4V3 | 2Z17    | 4.3                 | 4.21   | 4.39   | 5        | 90                | 600               | 1.0      | 3               | 1.0   | -3.5                            | 0    |
| BZX84B4V7 | 2Z1     | 4.7                 | 4.61   | 4.79   | 5        | 80                | 500               | 1.0      | 3               | 2.0   | -3.5                            | 0.2  |
| BZX84B5V1 | 2Z2     | 5.1                 | 5.00   | 5.20   | 5        | 60                | 480               | 1.0      | 2               | 2.0   | -2.7                            | 1.2  |
| BZX84B5V6 | 2Z3     | 5.6                 | 5.49   | 5.71   | 5        | 40                | 400               | 1.0      | 1               | 2.0   | -2.0                            | 2.5  |
| BZX84B6V2 | 2Z4     | 6.2                 | 6.08   | 6.32   | 5        | 10                | 150               | 1.0      | 3               | 4.0   | 0.4                             | 3.7  |
| BZX84B6V8 | 2Z5     | 6.8                 | 6.66   | 6.94   | 5        | 15                | 80                | 1.0      | 2               | 4.0   | 1.2                             | 4.5  |
| BZX84B7V5 | 2Z6     | 7.5                 | 7.35   | 7.65   | 5        | 15                | 80                | 1.0      | 1               | 5.0   | 2.5                             | 5.3  |
| BZX84B8V2 | 2Z7     | 8.2                 | 8.04   | 8.36   | 5        | 15                | 80                | 1.0      | 0.7             | 5.0   | 3.2                             | 6.2  |
| BZX84B9V1 | 2Z8     | 9.1                 | 8.92   | 9.28   | 5        | 15                | 100               | 1.0      | 0.5             | 6.0   | 3.8                             | 7.0  |
| BZX84B10  | 2Z9     | 10                  | 9.80   | 10.20  | 5        | 20                | 150               | 1.0      | 0.2             | 7.0   | 4.5                             | 8.0  |
| BZX84B11  | 2Y1     | 11                  | 10.78  | 11.22  | 5        | 20                | 150               | 1.0      | 0.1             | 8.0   | 5.4                             | 9.0  |
| BZX84B12  | 2Y2     | 12                  | 11.76  | 12.24  | 5        | 25                | 150               | 1.0      | 0.1             | 8.0   | 6.0                             | 10.0 |
| BZX84B13  | 2Y3     | 13                  | 12.74  | 13.26  | 5        | 30                | 170               | 1.0      | 0.1             | 8.0   | 7.0                             | 11.0 |
| BZX84B15  | 2Y4     | 15                  | 14.70  | 15.30  | 5        | 30                | 200               | 1.0      | 0.1             | 10.5  | 9.2                             | 13.0 |
| BZX84B16  | 2Y5     | 16                  | 15.68  | 16.32  | 5        | 40                | 200               | 1.0      | 0.1             | 11.2  | 10.4                            | 14.0 |
| BZX84B18  | 2Y6     | 18                  | 17.64  | 18.36  | 5        | 45                | 225               | 1.0      | 0.1             | 12.6  | 12.4                            | 16.0 |
| BZX84B20  | 2Y7     | 20                  | 19.60  | 20.40  | 5        | 55                | 225               | 1.0      | 0.1             | 14.0  | 14.4                            | 18.0 |
| BZX84B22  | 2Y8     | 22                  | 21.56  | 22.44  | 5        | 55                | 250               | 1.0      | 0.1             | 15.4  | 16.4                            | 20.0 |
| BZX84B24  | 2Y9     | 24                  | 23.52  | 24.48  | 5        | 70                | 250               | 1.0      | 0.1             | 16.8  | 18.4                            | 22.0 |
| BZX84B27  | 2Y10    | 27                  | 26.46  | 27.54  | 2        | 80                | 300               | 0.5      | 0.1             | 18.9  | 21.4                            | 25.3 |
| BZX84B30  | 2Y11    | 30                  | 29.40  | 30.60  | 2        | 80                | 300               | 0.5      | 0.1             | 21.0  | 24.4                            | 29.4 |
| BZX84B33  | 2Y12    | 33                  | 32.34  | 33.66  | 2        | 80                | 325               | 0.5      | 0.1             | 23.1  | 27.4                            | 33.4 |
| BZX84B36  | 2Y13    | 36                  | 35.28  | 36.72  | 2        | 90                | 350               | 0.5      | 0.1             | 25.2  | 30.4                            | 37.4 |
| BZX84B39  | 2Y14    | 39                  | 38.22  | 39.78  | 2        | 130               | 350               | 0.5      | 0.1             | 27.3  | 33.4                            | 41.2 |

1. Valid provided that device terminals are kept at ambient temperature.
2. Tested with pulses, period=5ms,pulse width =300μs.
3. f=1kHz.


### Typical Characteristics

Notes: Our company currently provide 5.1 V - 20 V products only


Zener Characteristics ( $V_z$  5.1V to 20 V)

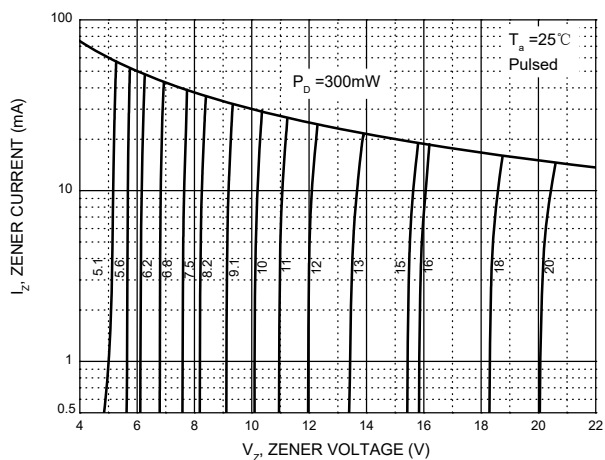


Temperature Coefficients

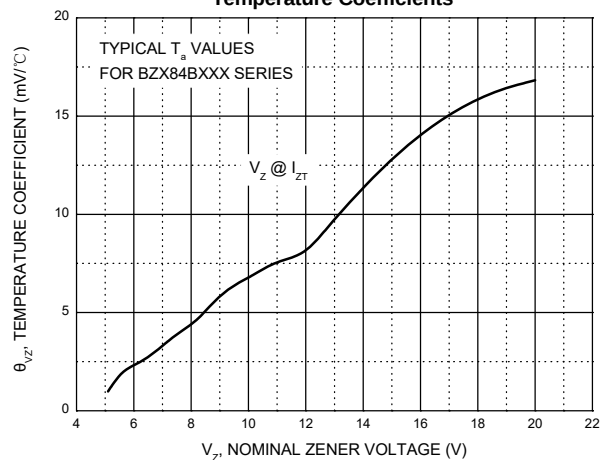


Typical Leakage Current

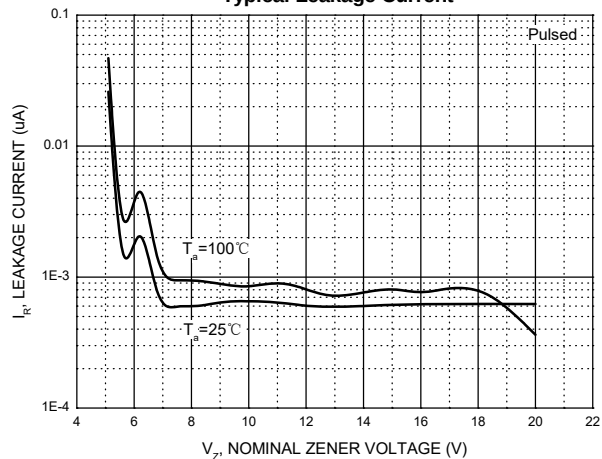


Typical Capacitance

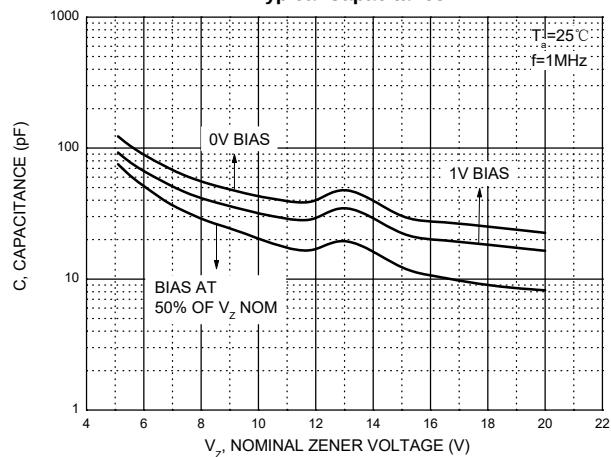


Effect of Zener Voltage on Zener Impedance

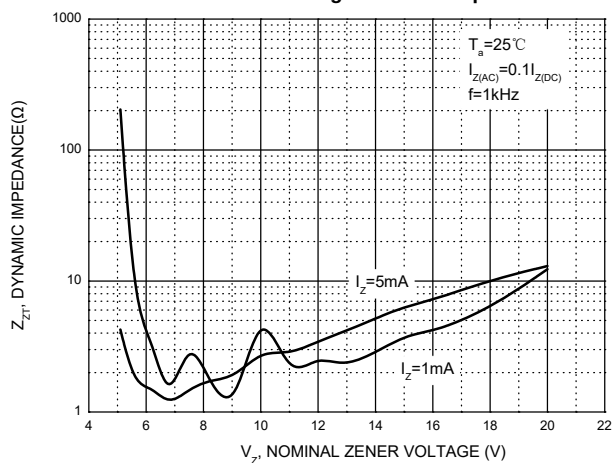

Power Derating Curve

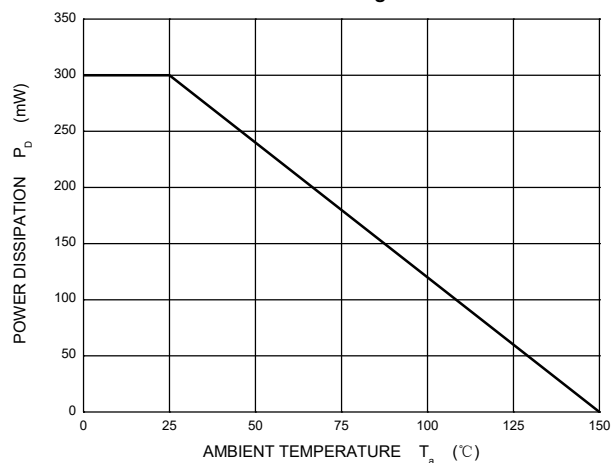


## SOT-23 Package Outline Dimensions

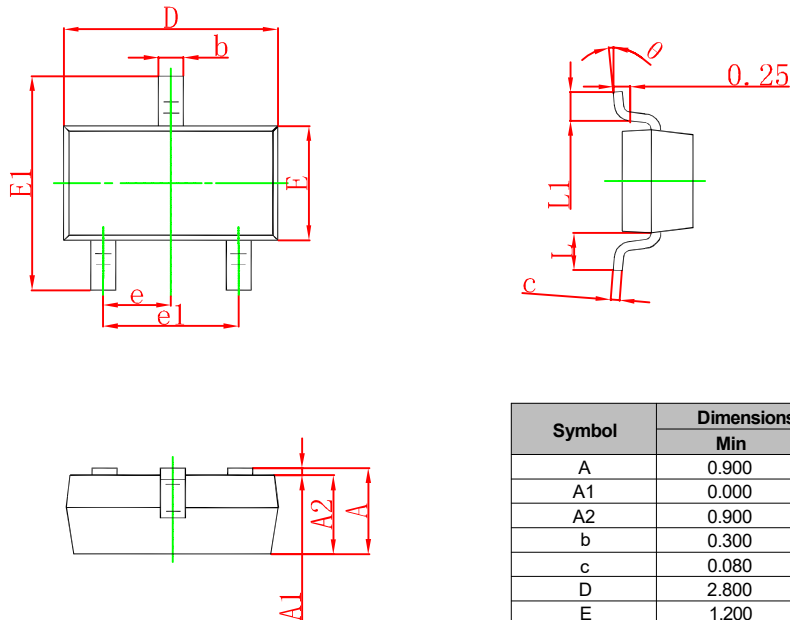

| Symbol   | Dimensions In Millimeters |       | Dimensions In Inches |       |
|----------|---------------------------|-------|----------------------|-------|
|          | Min                       | Max   | Min                  | Max   |
| A        | 0.900                     | 1.150 | 0.035                | 0.045 |
| A1       | 0.000                     | 0.100 | 0.000                | 0.004 |
| A2       | 0.900                     | 1.050 | 0.035                | 0.041 |
| b        | 0.300                     | 0.500 | 0.012                | 0.020 |
| c        | 0.080                     | 0.150 | 0.003                | 0.006 |
| D        | 2.800                     | 3.000 | 0.110                | 0.118 |
| E        | 1.200                     | 1.400 | 0.047                | 0.055 |
| E1       | 2.250                     | 2.550 | 0.089                | 0.100 |
| e        | 0.950 TYP                 |       | 0.037 TYP            |       |
| e1       | 1.800                     | 2.000 | 0.071                | 0.079 |
| L        | 0.550 REF                 |       | 0.022 REF            |       |
| L1       | 0.300                     | 0.500 | 0.012                | 0.020 |
| $\theta$ | 0°                        | 8°    | 0°                   | 8°    |

## SOT-23 Suggested Pad Layout



### Note:

1. Controlling dimension: in millimeters.
2. General tolerance:  $\pm 0.05\text{mm}$ .
3. The pad layout is for reference purposes only.