
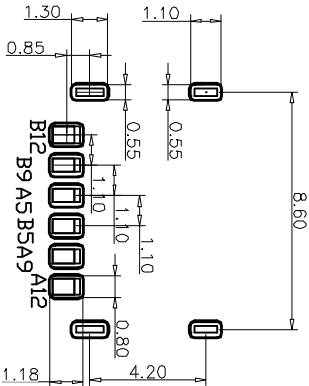
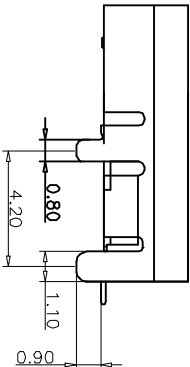




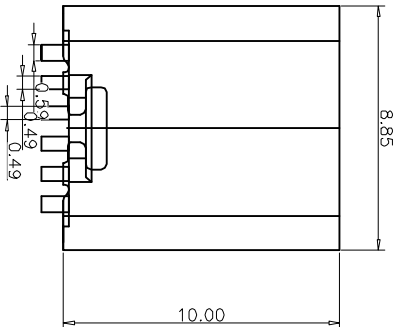

RECOMMEND P.C.B LAYOUT(COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ±0.05

- 备注(NOTE):
- 1材质:
- 1.1胶芯: LCP UL94 V-0
 - 1.2端子: C2680, T=0.2mm; 镍底, 镀金
 - 1.3外壳: 不锈钢201-H 表面镀镍
- 2.电气特性:
- 2.1.接触区: 接触电阻40mΩ Max, 允许10mΩ变化量, 测试条件: 20mV, 100mA下测量.
 - 2.2.接触电流: 3A VBUS引脚: 1.25A用于GND引脚; 其他引脚为0.25A.
 - 2.3.额定电压: 5V.
 - 2.4.耐受电压: 100VAC.
 - 2.5.绝缘电阻: 至少100兆欧.
- 3.机械性能:
- 3.1.插入力: 0.5-2.0Kg
 - 3.2.拔出力: 0.6-2.04Kg
 - 3.3.插拔次数: 5000次.
- 4.工作环境: -20℃ to +85℃.

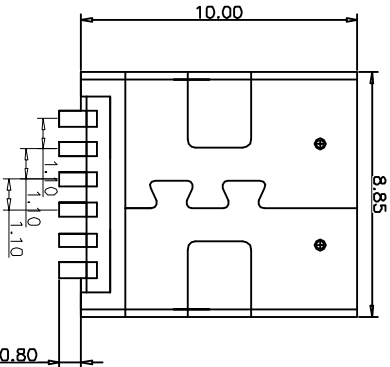


TABLE:

NO	PART	QTY	Material
1	SHELL	1	ZINC ALLOY,NI30u"Min PLATED
2	CONTACT	6	C2680,TIN80u"/Au1u"/NI30u" PLATED
3	IMD HOUSING	1	LCP UL94 V-0 BLACK
4	CAP	1	LCP UL94 V-0 BLACK
5	WATERPROOF RING	1	SILICONE UL94 V-0 BLACK

 深圳市万骏达电子有限公司 http://www.wanjunda.com		图号 (DWG NO)		单位(UNIT): MM
品名 (ITEM NO)	TYPE-C 6P板上:无弹10.0	版本 (REV)		比例(SCALE) 1:1
料号 (PART NO)	TPC-6P-WT-10.0	日期 (DATE)		未注公差 TOLERANCE UNSPECIFIED X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 X.X* ±0.05 X.X* ±0.02
型号 (MODEL NO)		设计 (DESIGN)		
		审核 (CHECKED)		
		核准 (APPROVED)		

B12	GND
B9	VBUS
B5	CC2
A5	CC1
A9	VBUS
A12	GND
PIN	SIGNAL NAME