

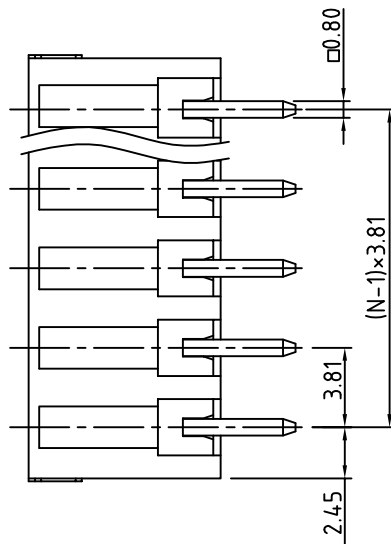
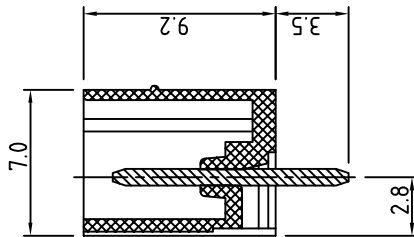


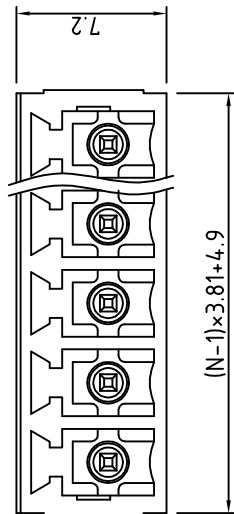

N= Number of poles

P.C.B LAYOUT

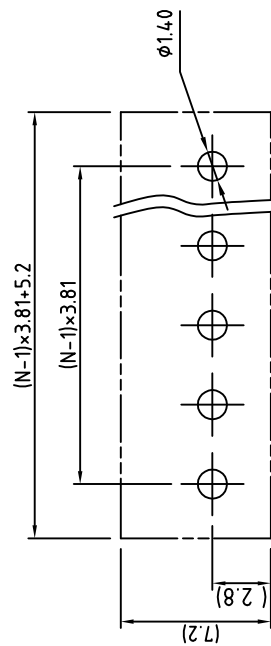

- Material**
- Terminal body (contact pin): Brass(CuZn) Tin plated
 - Insulator (housing): Thermoplastic (UL94V-0)
- Electrical** cULus/CSA/VDE
- Voltage rating: 300VAC/125VAC/125VAC
 - Current rating: 10A/8A/10.5A
 - Withstanding Voltage: 16KV/16KV/2.5KV
 - Operating temperature: -30°C to +105°C
 - Soldering temperature: 250°C±10°C/5 Sec
 - Safety Approval:   
- RoHS Compliant

PART NUMBER:

OSTOQXX3250

- No. of Poles : 02: 2 Poles : 24: 24 Poles
- COLOR
- 0: Black
 - 5: Green (Standard)
 - 6: Blue
 - 8: Grey



ON-SHORE TECHNOLOGY, INC.

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

OSTOQ 3.81mm Series vertical 2P-24P Triangle Key Lock

TITLE	OSTOQ 3.81mm Series vertical 2P-24P Triangle Key Lock	DWG NO.	OSTOQXX3250.DWG
PART NO.	OSTOQXX3250	CUST NO.	
APPROVED	CHECKED	DESIGNED	DRAWN
Shi Jun 2006.10.30	Marvin 2006.10.30	Marvin 2006.10.30	Marvin 2006.10.30
SHEET: 01/01		REV.: G	
Tolerance		UNIT: mm	SCALE: NONE
X: ±0.50		X.X: ±0.30	X.XX: ±0.10
X°: ±1°		X°: ±1°	X°: ±1°

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

SIGN	DATE	DESCRIPTION	APPROVER