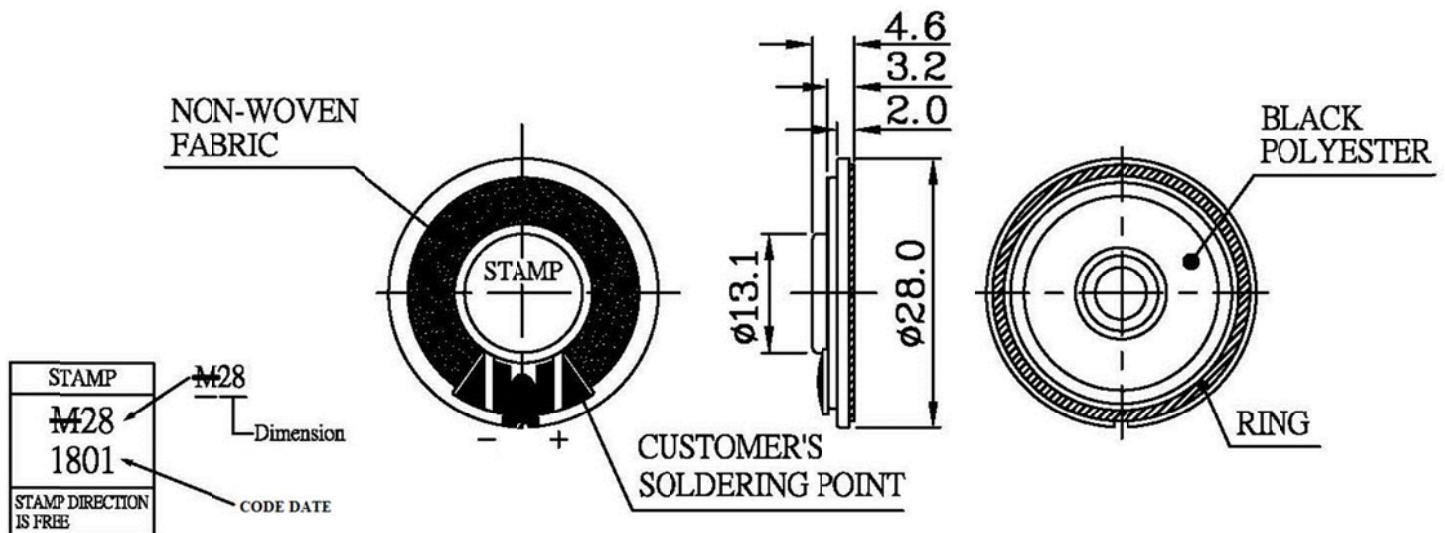


Specifications:

Impedance (Ω)	$8 \pm 15\%$ at 1000 Hz at 1.0 V
Rated Power (W)	0.5
Max Power (W)	1.0
Resonance Freq F_o (Hz)	$600 \pm 20\%$ at 1.0 V
Frequency Range (Hz)	$F_o \sim 6000$
Output S.P.L. (dB)	96 ± 3 at .5w/1m 1.0k, 1.2k, 1.5k, 2.0kHZ 79 ± 3 at 1w/1m 1.0k, 1.2k, 1.5k, 2.0kHZ
Frame Material	Metal
Operating Temp	-20 to 55°C
Weight (g)	4.5
Options	For other options contact factory

Dimensions: ± 0.3 (units: mm)

ROHS Compliant


Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mallory Sonalert:](#)

[PSR28N08AK](#)