

# HC-M-01-COAX-CK2,5-50-M - Connector



1066960

<https://www.phoenixcontact.com/us/products/1066960>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Connector, number of positions: 1, power contacts: 0, control contacts: 1, Pin, Crimp connection, 48 V, 16 A, 0.5 mm<sup>2</sup> ... 4 mm<sup>2</sup>, external cable diameter:3 mm ... 9.5 mm, application: COAX, 50 Ω

## Commercial data

Item number	1066960
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF62
Product key	BF7ACB
Catalog page	Page 585 (C-2-2019)
GTIN	4055626734651
Weight per piece (including packing)	31.889 g
Weight per piece (excluding packing)	31.889 g
Customs tariff number	85389099
Country of origin	CN

# HC-M-01-COAX-CK2,5-50-M - Connector



1066960

<https://www.phoenixcontact.com/us/products/1066960>

## Technical data

### Notes

General	Order crimp contacts separately
General	The potential of the EMC connector housing is isolated from the potential of the heavy connector.
General	Clamps for the clamping range of 3 mm - 6 mm and 6 mm - 9.5 mm
General	Can be used in Item No.: 1417374 HC-M-02-EMC-M
General	For 50 $\Omega$ coaxial cables

### Product properties

Product type	EMC insert, modular
Series	HC-M-EMV
Application	COAX
Number of positions	1
Connection profile	1
No. of cable outlets	1
No. of power contacts	0
No. of control contacts	1
Contact material type	turned
Shielded	yes

### Insulation characteristics

Overvoltage category	III
Degree of pollution	3

### Electrical properties

Rated voltage (III/3)	48 V
Rated surge voltage	0.8 kV
Rated current	16 A
Wave impedance	50 $\Omega$

### Connection data

#### Connection technology

Connection technology	Crimp connection
-----------------------	------------------

#### Conductor connection

Conductor cross section	0.5 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Connection cross section AWG	20 ... 12
Stripping length of the individual wire	8 mm (6 mm with 2.5 mm <sup>2</sup> )


### Dimensions

# HC-M-01-COAX-CK2,5-50-M - Connector



1066960

<https://www.phoenixcontact.com/us/products/1066960>

Dimensional drawing	
Height	15.5 mm
Length	46.2 mm

## Mechanical characteristics

Contact diameter	2.5 mm
------------------	--------

## Material specifications

Material Line conductor	Zinc alloy
Flammability rating according to UL 94	V0
Contact material	Copper alloy
Contact surface material	Au
Contact carrier material	PC

## Cable/line

External cable diameter	3 mm ... 9.5 mm
Stripping length of the individual wire	8 mm (6 mm with 2.5 mm <sup>2</sup> )
Wave impedance	50 Ω

## Mechanical properties

### Mechanical data

Insertion/withdrawal cycles	≥ 500
-----------------------------	-------

## Environmental and real-life conditions

### Ambient conditions

Ambient temperature (operation)	-40 °C ... 85 °C
---------------------------------	------------------

## Mounting

Assembly note	Disassemble the connector from the plastic module using the tool, order no.: 1678635 HC-M-EMV-KON-EWZ
	The round contact carrier can be separated in the middle for the purpose of mounting/removing the contact.
	Sheath stripping length: 23 mm, shield length: 13 mm, inner conductor stripping length: 8 mm

# HC-M-01-COAX-CK2,5-50-M - Connector




1066960

<https://www.phoenixcontact.com/us/products/1066960>

## Drawings

Dimensional drawing

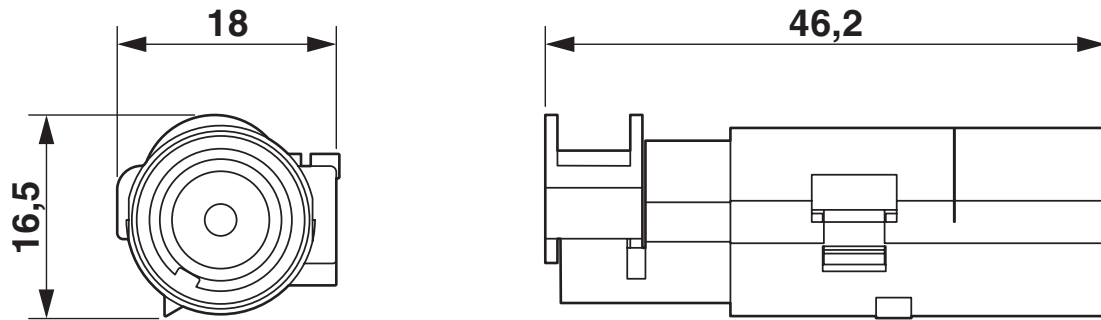

Male insert

# HC-M-01-COAX-CK2,5-50-M - Connector



1066960

<https://www.phoenixcontact.com/us/products/1066960>

## Classifications

### ECLASS

ECLASS-11.0	27440205
ECLASS-12.0	27440205
ECLASS-13.0	27440205

### ETIM

ETIM 9.0	EC000438
----------	----------

### UNSPSC

UNSPSC 21.0	39121500
-------------	----------

# HC-M-01-COAX-CK2,5-50-M - Connector



1066960  
<https://www.phoenixcontact.com/us/products/1066960>

## Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)