



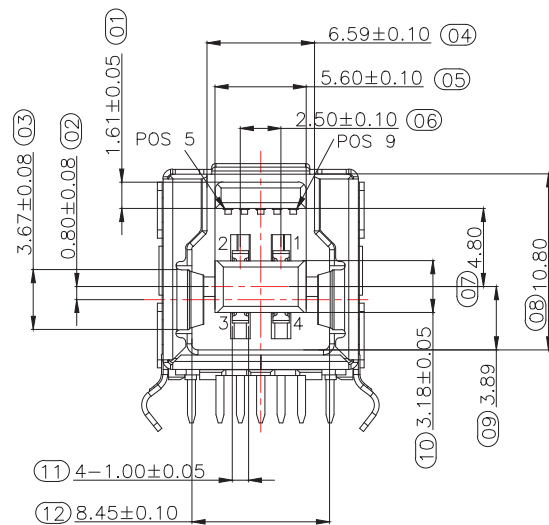

09=UDE 唛码内容: YYMMDD

DATE CODE :201013

日 (01~31)
月 (01~12)
年 (2020填写20)

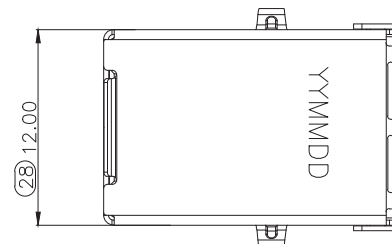

SPECIFICATIONS:

Contact current Rating:

1.8 Amperes for pin1&pin4.

0.25 Amperes other contacts

Dielectric Withstanding Voltage:AC 100V(RMS)

Insulation resistance:100Megohms Minimum.

Contact Resistance:

30mΩ Max for pin1&pin4

50mΩ Max for other contacts

Mechanical Characteristics:

Mating Force:35 Newtons.Maximum

Unmating Force:10 Newtons.Minimum.

MATERIAL: 8N Min After Durability

Housing: PBT+30%GF 94V-0 COLOR:BLUE

Contact: copper alloy(T=0.25mm)

Shell: Brass

PLATING:




Contact: Au Plated on contact area

Tin Plated on solder area


Nickel underplating over all

Shell: Nickel Plated

operating Temperature:-55°to+85°

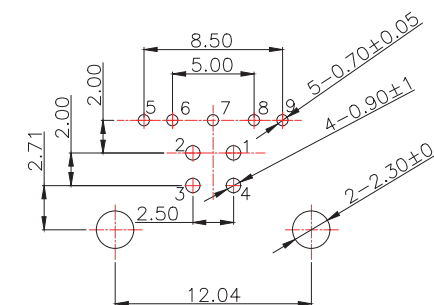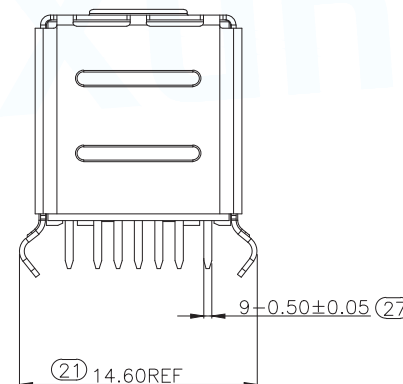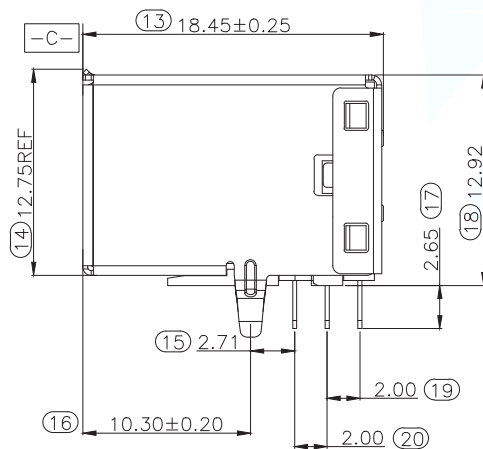


REFERENCE PCB LAYOUT

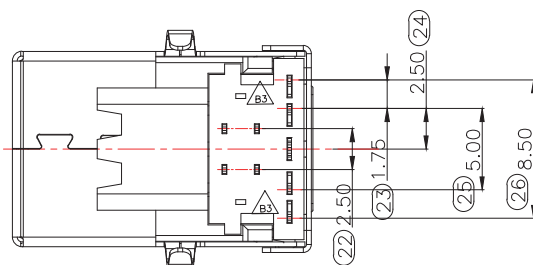


Pin Number	Signal Name	Pin Number	Signal Name
1	VBUS	5	StdB_SSTX-
2	D-	6	StdB_SSTX+
3	D+	7	GND_DRAIN
4	GND	8	StdB_SSRX-
Shell	Shield	9	StdB_SSRX+

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd		
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: USB 3.0 BF 90°DIP(H=12.9)	
			PAR	USB-306BWD-ARW
			DWN	
			CHKD	
			APVD	
			SCALE:1:1	UNIT:MM
DECIMALS:	ANGLES:	CUSTOMER COPY		
.X:±0.30	.X':±3°	SIZE:A4	SHEET:1F1	REV:A
.XX:±0.20	.XX':±2°			
.XXX:±0.10				

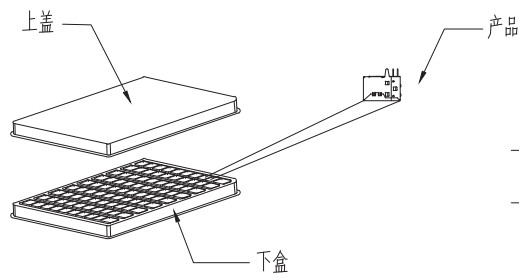


① PE真空盒(1Set).


② 100Pcs/盒,10盒1扎用PE模包扎.

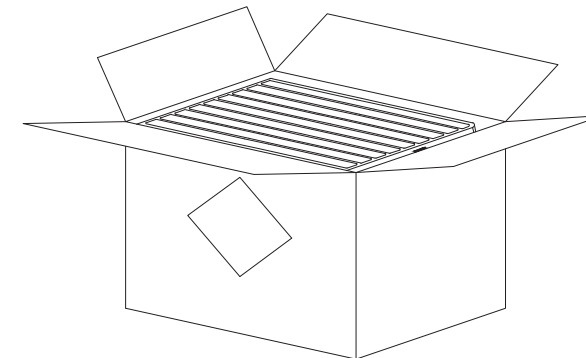


③ 20盒/箱(2k).

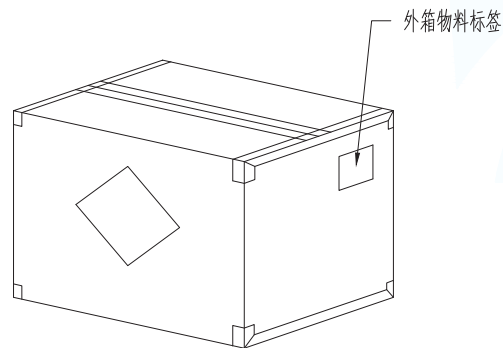

⑥ 依图示粘贴产品或ROHS标签.

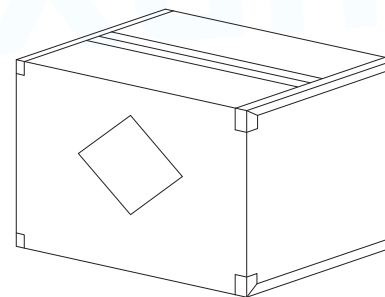

⑤ 外箱用透明胶纸带封"工"字型.

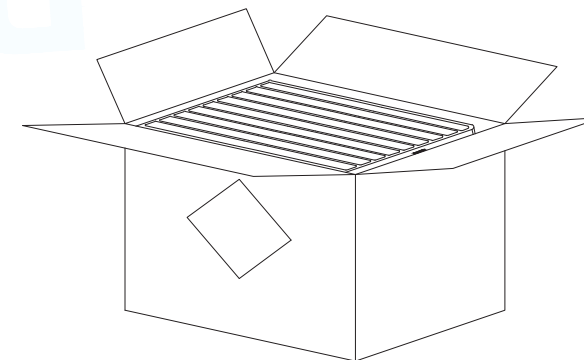

④ 每箱放置20盒*1,若尾数箱在空间处加装填充物.

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd			
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: USB 3.0 BF 90°DIP(H=12.9)		
			PAR	USB-306BWD-ARW	
DECIMALS:	ANGLES:		DWN		
.X:±0.30	.X':±3°		CHKD		
.XX:±0.20	.XX':±2°		APVD		
.XXX:±0.10			SCALE 1:1	UNIT:MM	
			SIZE:A4	SHEET:1F1	REV:A
			CUSTOMER COPY		