
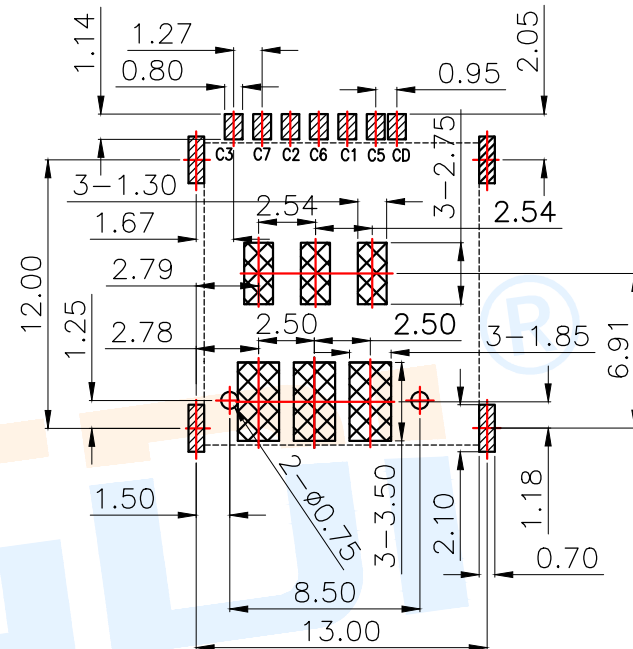
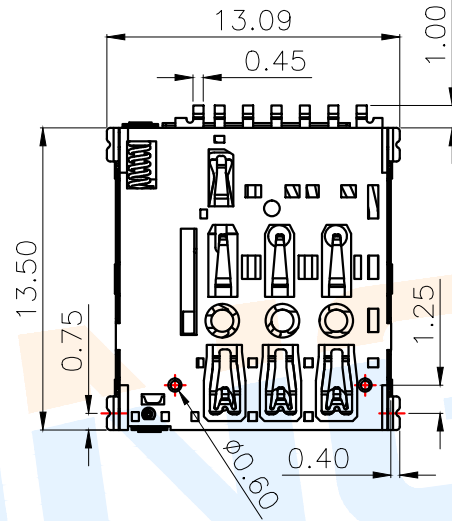
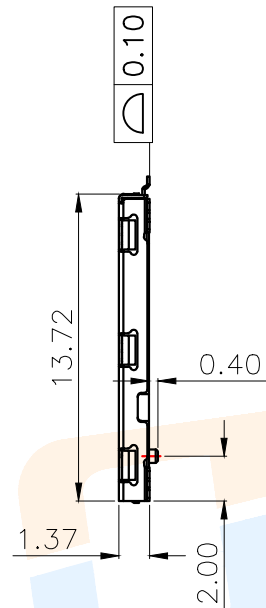


RoHS

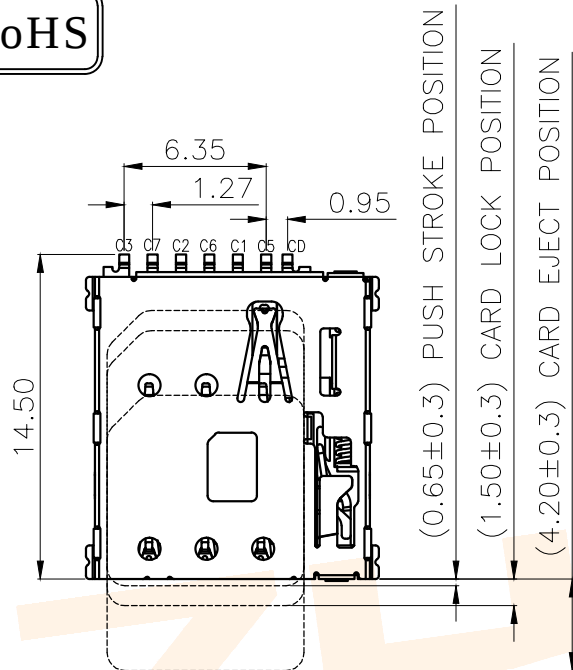




RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ± 0.05

PAD
 KEEP OUT AREA

Specifications/技术规格:

- 1.Current rating/额定电流: 1.0A
- 2.Voltage rating/额定电压: 30V AC/DC
- 3.Insulation Resistance/绝缘电阻: 100M Ω Min 500V DC
- 4.Dielectric Withstanding/ 耐电压: 500V AC/minute
- 5.Contact Resistance/ 接触电阻: 100m Ω Max
- 6.Durability/ 耐久性: 5,000 Insertions
- 7.Operating Temperature/ 工作温度: -40 $^{\circ}$ C to +85 $^{\circ}$ C

SIM pin assignment	
PIN#	Name
C1	VCC供电电压
C2	RST重置
C3	CLK时钟
C5	GND接地
C6	VPP程序电压
C7	I/O输入输出
CD	Detect Switch

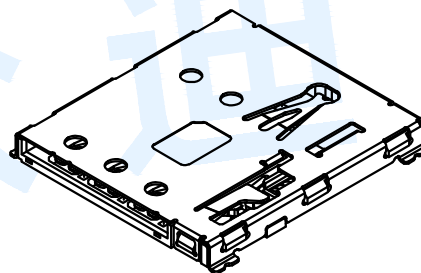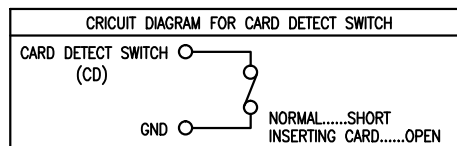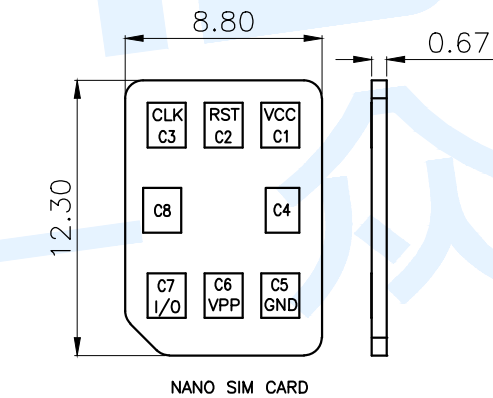

Ⓕ	Terminal		7	Phosphor bronze	Au plated
Ⓔ	Bullet		1	SUS	
Ⓗ	Spring		1	SUS	
Ⓖ	Contact		7	Phosphor bronze	Au plated
Ⓖ	Cover		1	SUS	Ni Plating
Ⓖ	Base		1	LCP	Black
NO.	Name	Number	Qty	Materil	Remarks

ZHONGDI Zhongdi Electronic Technology Co., Ltd

design	date	name	NANO SIM CARD CONNECTOR
Review	date	model	NANO-SIM-0500B-P
Approved	date		

Drawing number: Proportion 1:1 unit mm gaps number A4

modify Review Approved

angle	$\pm 2^{\circ}$
10~30	± 0.30
5~10	± 0.20
~ 5	± 0.10



Tolerance not specified

RoHS

客户拉出方向

NOTES

1. 每卷包装数量:1500PCS/每卷
2. 卷带包装方式:

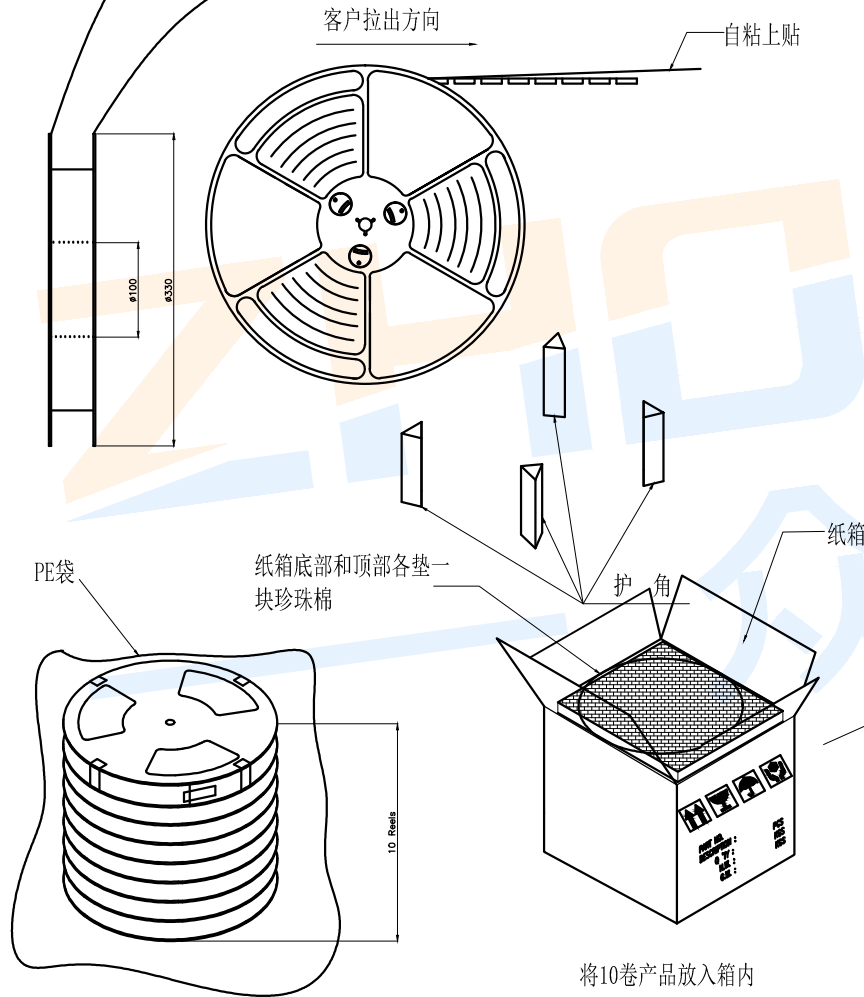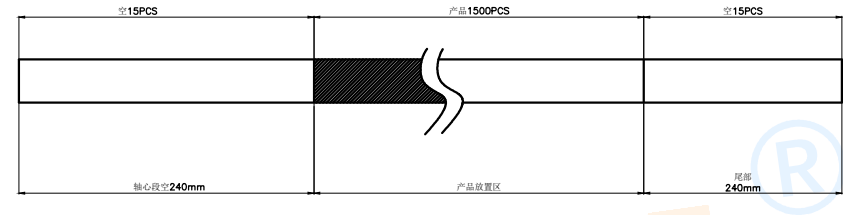

ZHONGDI® — 众迪 — Zhongdi Electronic Technology Co., Ltd											
design		date		name		NANO SIM CARD CONNECTOR					
Review		date		model		NANO-SIM-0500B-P					
Approved		date									
number											
on	1:1	unit	mm	gape number						A4	