
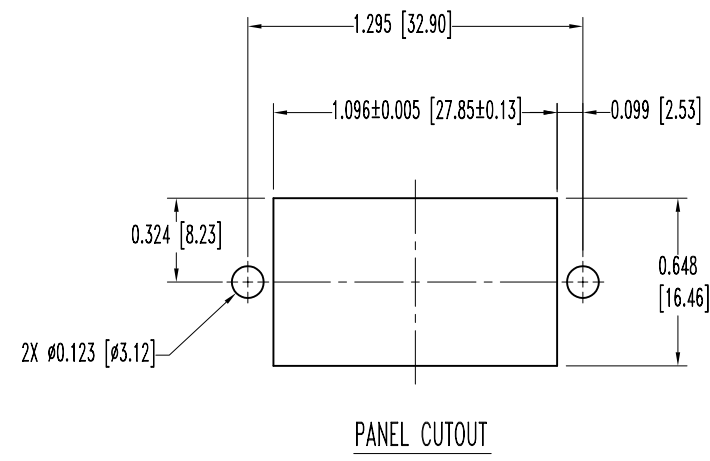
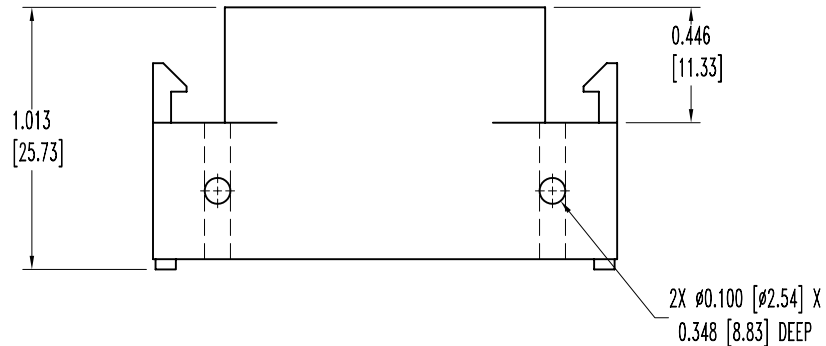



POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.


SK3341

DATE	REV	REVISION RECORD	APP	DR	CK
5-21 01	A	ECO 17771	RCW	JG	TK
1-22 02	B	ECO 18866	RCW	YK	TK
2-20 02	C	ECO 18977	RCW	ME	COLE
4-18 05	D	ECO 23961		YK	

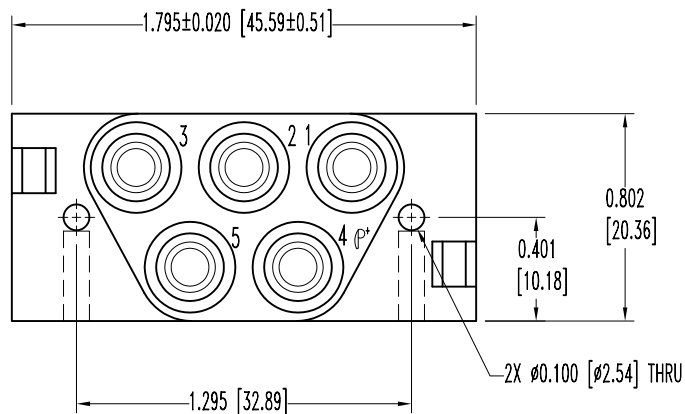

NOTES:

- MATERIALS AND FINISHES:
INSULATOR: GLASS FILLED POLYESTER, UL 94V-0, COLOR BLUE.
- ELECTRICAL CHARACTERISTICS:
INSULATOR RESISTANCE: 5 G OHMS PER IEC 512-2, TEST 2b.
WORKING VOLTAGE: 600 MINIMUM V r.m.s.
- WORKING TEMPERATURE: -55°C TO +125°C.
- DIMENSIONS ARE IN INCHES [MILLIMETERS].

 POSITRONIC INDUSTRIES INC. www.connectpositronic.com			
 DECIMAL TOL. ± 0.015 [0.38]	PCS SERIES	SCALE N.T.S.	DRAWN BY M.ENEAL
	TITLE PLS5W5M1000		
ANGULAR TOL. ± N/A	DATE 5-3-00	DRAWING NUMBER SK3341	REV. D