



## 4-Channel Analog Input Module for Resistance Sensors

Temperature Range: -30 °C ... +150 °C

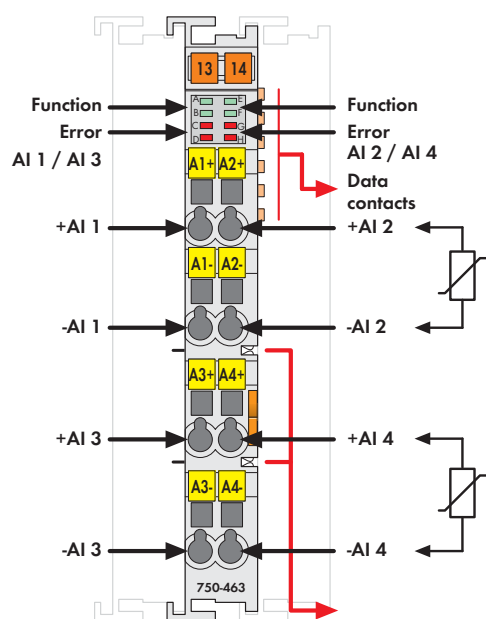

Delivered without miniature WSB markers

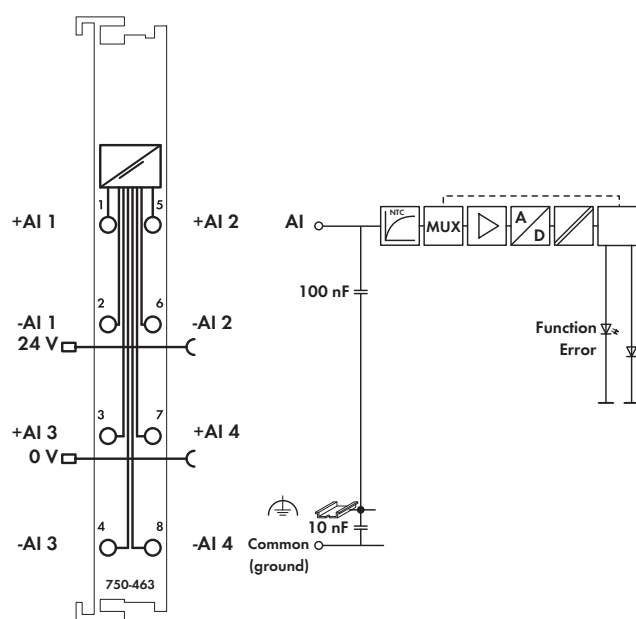

The input module directly connects to selected Pt or Ni resistance sensors. It can only be operated as a 4-channel (2-conductor technology) module. Its temperature range is restricted to -30 °C to +150 °C.

The module automatically linearizes the entire temperature range. A sensor error is indicated by a red LED. The module can be configured via WAGO-I/O-CHECK or GSD files.

The module features multiple setting options and high accuracy.

| Description                                                                               | Item No.                                                                            | Pack. Unit |
|-------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|------------|
| 4 AI RTD/-30 °C ... +150 °C                                                               | 750-463                                                                             | 1          |
| <b>Accessories</b>                                                                        |                                                                                     |            |
| <b>Miniature WSB Quick marking system</b>                                                 |                                                                                     |            |
|  plain | 248-501                                                                             | 5          |
| with marking                                                                              | see Section 11                                                                      |            |
| <b>Approvals</b>                                                                          |                                                                                     |            |
| Conformity marking                                                                        | CE                                                                                  |            |
| Korea Certification                                                                       |  |            |
| ANSI/ISA 12.12.01                                                                         | Class I, Div. 2, Grp. ABCD, T4                                                      |            |
| TÜV 07 ATEX 554086 X                                                                      | I M2 Ex d I Mb,<br>II 3 G Ex nA IIC T4 Gc,<br>II 3 D Ex tc IIIC T135 °C Dc          |            |
| IECEx TUN 09.0001 X                                                                       | Ex d I Mb,<br>Ex nA IIC T4 Gc,<br>Ex tc IIIC T135 °C Dc                             |            |

| Technical Data                                          |                                                                             |
|---------------------------------------------------------|-----------------------------------------------------------------------------|
| Number of inputs                                        | 4                                                                           |
| Power supply                                            | via system voltage DC/DC                                                    |
| Current consumption typ. (internal)                     | 50 mA                                                                       |
| Sensor types                                            | Pt1000 (default setting),<br>Ni1000, Ni1000 TK5000,<br>KTY81 110, KTY81 210 |
| Sensor connection                                       | 2-conductor                                                                 |
| Temperature range                                       | -30 °C ... +150 °C                                                          |
| Resolution (over entire range)                          | 0.1 °C                                                                      |
| Measurement repetition rate (standard)                  | 1.1 s                                                                       |
| Measurement repetition rate (2-channel/<br>2-conductor) | 0.63 s                                                                      |
| Response time (max.)                                    | 4 s                                                                         |
| Measuring error (25 °C)                                 | ≤ 0.5 K in temperature range:<br>-30 °C ... +150 °C                         |
| Temperature coefficient                                 | ≤ 20 ppm/K                                                                  |
| Isolation                                               | 500 V system/field                                                          |
| Measuring current (typ.)                                | ≤ 350 µA                                                                    |
| Bit width                                               | 4 x 16 bits data<br>4 x 8 bits control/status (optional)                    |
| Wire connection                                         | CAGE CLAMP®                                                                 |
| Cross sections                                          | 0.08 mm² ... 2.5 mm² / AWG 28 ... 14                                        |
| Strip lengths                                           | 8 ... 9 mm / 0.33 in                                                        |
| Width                                                   | 12 mm                                                                       |
| Weight                                                  | 50.6 g                                                                      |
| EMC immunity of interference                            | acc. to EN 61000-6-1, EN 61000-6-2                                          |
| EMC emission of interference                            | acc. to EN 61000-6-3                                                        |