

TM85P06P

P-Channel Enhancement Mosfet

General Description • Low $R_{DS(ON)}$ • RoHS and Halogen-Free Compliant Applications • Load switch • PWM	General Features $V_{DS} = -60V$ $I_D = -85A$ $R_{DS(ON)} = 12m\Omega (typ.) @ V_{GS} = -10V$ 100% UIS Tested 100% R_g Tested 																																									
Marking: 85P06 P:TO-220AB G D S																																										
Absolute Maximum Ratings ($T_C = 25^{\circ}C$ unless otherwise noted) <table><tr><th>Symbol</th><th>Parameter</th><th>Ratings</th><th>Units</th></tr><tr><td>V_{DS}</td><td>Drain-Source Voltage</td><td>-60</td><td>V</td></tr><tr><td>V_{GS}</td><td>Gate-Source Voltage</td><td>± 20</td><td>V</td></tr><tr><td rowspan="2">I_D</td><td>Continuous Drain Current</td><td>-85</td><td rowspan="3">A</td></tr><tr><td>Continuous Drain Current-$T_C = 100^{\circ}C$</td><td>-50</td></tr><tr><td>I_{DM}</td><td>Pulsed Drain Current¹</td><td>-265</td></tr><tr><td>P_D</td><td>Power Dissipation</td><td>130</td><td>W</td></tr><tr><td>E_{AS}</td><td>Single pulse avalanche energy²</td><td>515</td><td>mJ</td></tr><tr><td>T_J, T_{STG}</td><td>Operating and Storage Junction Temperature Range</td><td>-55-+175</td><td>$^{\circ}C$</td></tr></table> Thermal Characteristics <table><tr><th>Symbol</th><th>Parameter</th><th>Max</th><th>Units</th></tr><tr><td>$R_{\theta JC}$</td><td>Thermal Resistance, Junction to Case</td><td>1.67</td><td>$^{\circ}C/W$</td></tr></table>		Symbol	Parameter	Ratings	Units	V_{DS}	Drain-Source Voltage	-60	V	V_{GS}	Gate-Source Voltage	± 20	V	I_D	Continuous Drain Current	-85	A	Continuous Drain Current- $T_C = 100^{\circ}C$	-50	I_{DM}	Pulsed Drain Current ¹	-265	P_D	Power Dissipation	130	W	E_{AS}	Single pulse avalanche energy ²	515	mJ	T_J, T_{STG}	Operating and Storage Junction Temperature Range	-55-+175	$^{\circ}C$	Symbol	Parameter	Max	Units	$R_{\theta JC}$	Thermal Resistance, Junction to Case	1.67	$^{\circ}C/W$
Symbol	Parameter	Ratings	Units																																							
V_{DS}	Drain-Source Voltage	-60	V																																							
V_{GS}	Gate-Source Voltage	± 20	V																																							
I_D	Continuous Drain Current	-85	A																																							
	Continuous Drain Current- $T_C = 100^{\circ}C$	-50																																								
I_{DM}	Pulsed Drain Current ¹	-265																																								
P_D	Power Dissipation	130	W																																							
E_{AS}	Single pulse avalanche energy ²	515	mJ																																							
T_J, T_{STG}	Operating and Storage Junction Temperature Range	-55-+175	$^{\circ}C$																																							
Symbol	Parameter	Max	Units																																							
$R_{\theta JC}$	Thermal Resistance, Junction to Case	1.67	$^{\circ}C/W$																																							



TM85P06P

P-Channel Enhancement Mosfet

Electrical Characteristics: ($T_c=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
Off Characteristics						
BV _{DSS}	Drain-Sourctce Breakdown Voltage	V _{GS} =0V, I _D =250 μ A	-60	-72	---	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{GS} =0V, V _{DS} =-60V	---	---	-1	μ A
I _{GSS}	Gate-Source Leakage Current	V _{GS} =± 20V, V _{DS} =0A	---	---	± 100	nA
On Characteristics						
V _{GS(th)}	GATE-Source Threshold Voltage	V _{GS} =V _{DS} , I _D =250 μ A	-1	-2	-3	V
R _{DS(ON)}	Drain-Source On Resistance	V _{GS} =-10V, I _D =-20A	---	12	14	m Ω
		V _{GS} =-4.5V, I _D =-15A	---	14.3	18.6	m Ω
Dynamic Characteristics						
C _{iss}	Input Capacitance	V _{DS} =-25V, V _{GS} =0V, f=1MHz	---	8699	---	pF
C _{oss}	Output Capacitance		---	289	--	
C _{rss}	Reverse Transfer Capacitance		---	209	---	
Switching Characteristics						
t _{d(on)}	Turn-On Delay Time	V _{DS} =-30V, R _{ENG} =3 Ω, V _{GS} =-10V	---	25	---	ns
t _r	Rise Time		---	20	---	ns
t _{d(off)}	Turn-Off Delay Time		---	137	---	ns
t _f	Fall Time		---	29	---	ns
Q _g	Total Gate Charge	V _{GS} =-10V, V _{DS} =-30V, I _D =-20A	---	139	---	nc
Q _{gs}	Gate-Source Charge		---	18	---	nc
Q _{gd}	Gate-Drain “Miller” Charge		---	27	---	nc
Drain-Source Diode Characteristics						
V _{SD}	Diode Forward Voltage ³	V _{GS} =0V, I _{SD} =-20A	---	---	1.2	V
I _S	Continuous Drain Curren	VD=VG=0V	---	---	-85	A
I _{SM}	Pulsed Drain Current		---	---	-265	A
T _{rr}	Reverse Recovery Time	I _F =20A, T _J =25℃	---	56	---	ns
Q _{rr}	Reverse Recovery Charge	dI/dt=100A/us	---	63	---	nc

Notes:

- 1.Repetitive Rating: Pulse width limited by maximum junction temperature.
- 2.EAS condition: $T_J=25^\circ\text{C}, V_{DD}=40V, V_G=-10V, R_g=25\Omega, L=0.5mH$.
- 3.Repetitive Rating: Pulse width limited by maximum junction temperature.

TM85P06P

P-Channel Enhancement Mosfet

Typical Characteristics

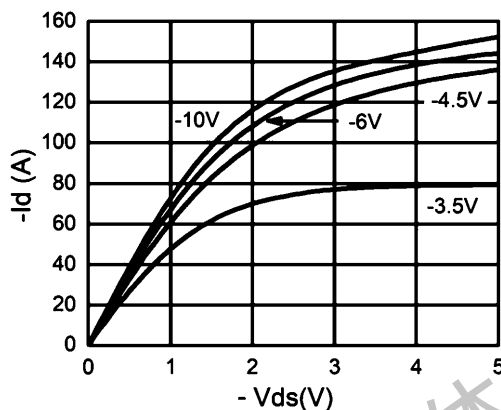


Figure 1. Output Characteristics

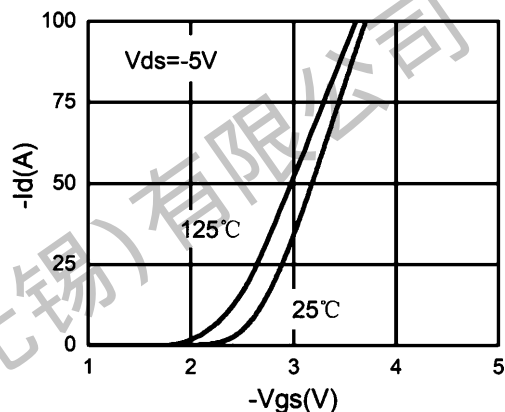


Figure 2. Transfer Characteristics

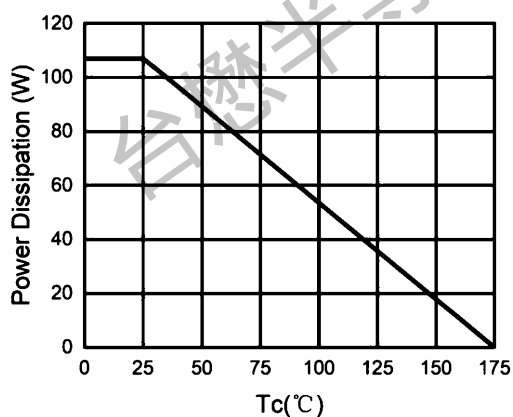


Figure 3. Power Dissipation

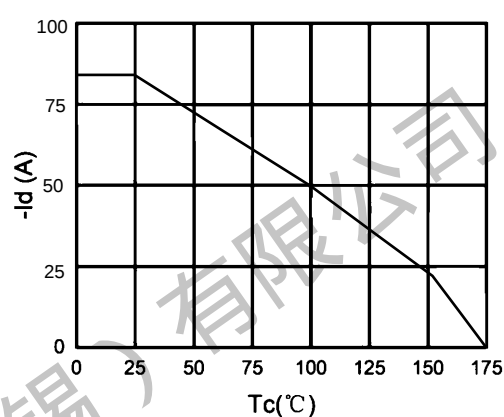


Figure 4. Drain Current

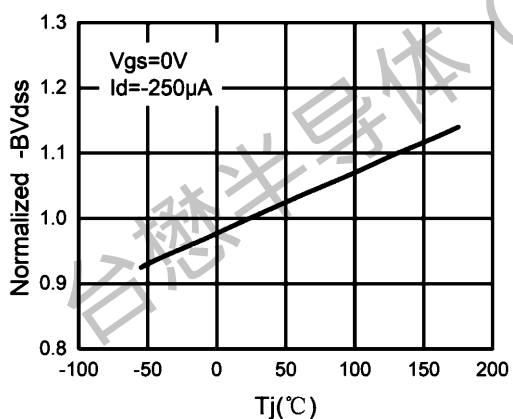


Figure 5. BV_{DSS} vs Junction Temperature

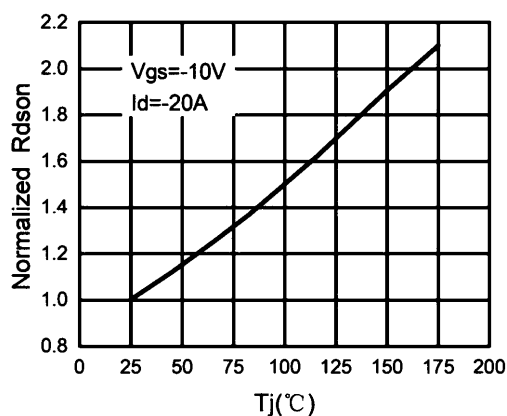


Figure 6. $R_{DS(ON)}$ vs Junction Temperature

TM85P06P

P-Channel Enhancement Mosfet

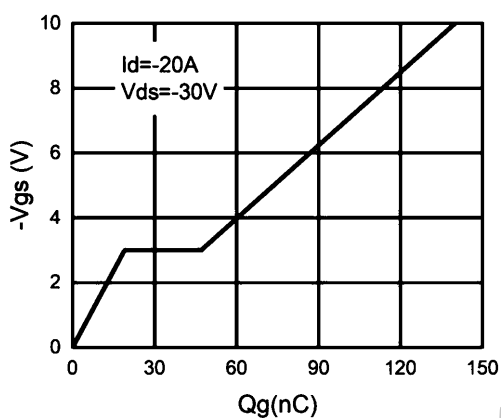


Figure 7. Gate Charge Waveforms

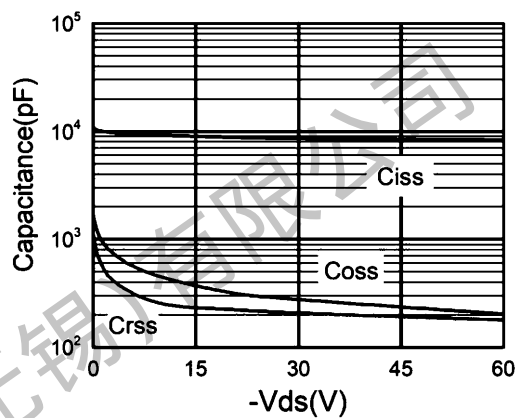


Figure 8. Capacitance

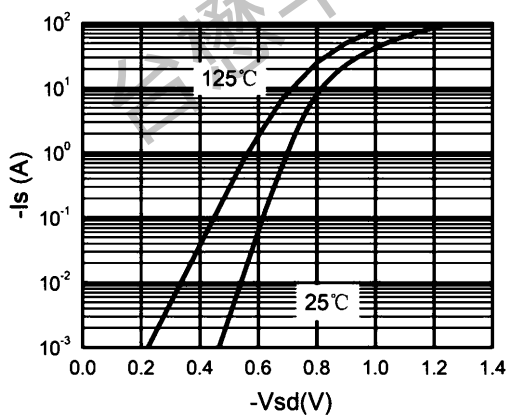


Figure 9. Body-Diode Characteristics


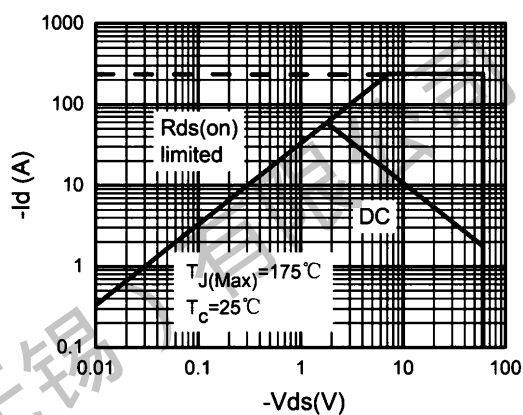


Figure 10. Maximum Safe Operating Area

TM85P06P


P-Channel Enhancement Mosfet

Package Mechanical Data: TO-220AB

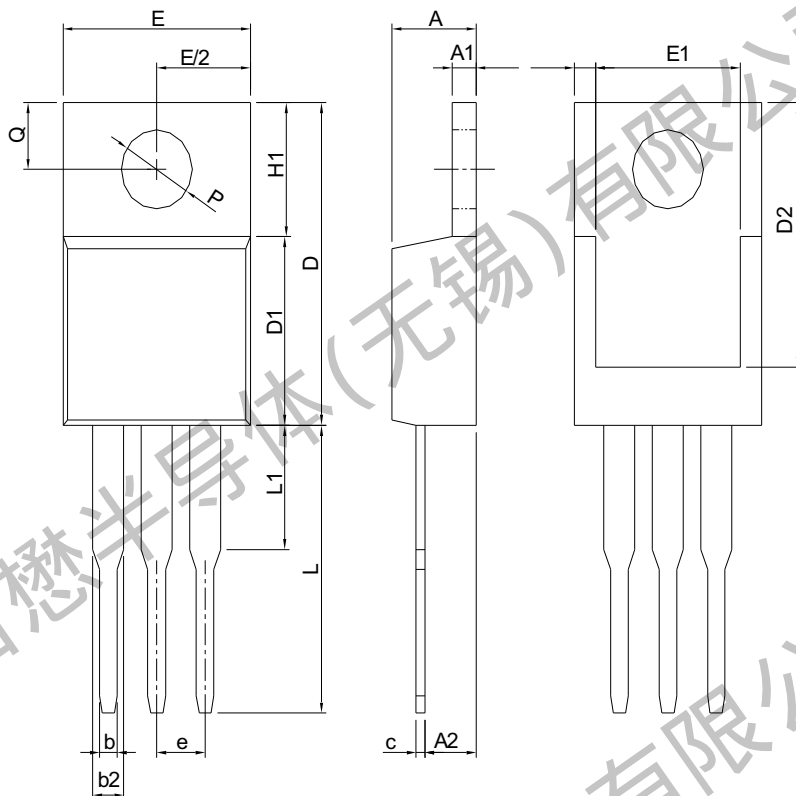

SYMBOL	TO-220			
	MILLIMETERS		INCHES	
	MIN.	MAX.	MIN.	MAX.
A	3.56	4.83	0.140	0.190
A1	0.51	1.40	0.020	0.055
A2	2.03	2.92	0.080	0.115
b	0.38	1.02	0.015	0.040
b2	1.14	1.78	0.045	0.070
c	0.36	0.61	0.014	0.024
D	14.22	16.51	0.560	0.650
D1	8.38	9.02	0.330	0.355
D2	12.19	13.65	0.480	0.537
E	9.65	10.67	0.380	0.420
E1	6.86	8.89	0.270	0.350
e	2.54 BSC		0.100 BSC	
H1	5.84	6.86	0.230	0.270
L	12.70	14.73	0.500	0.580
L1	-	6.35	-	0.250
P	3.53	4.09	0.139	0.161
Q	2.54	3.43	0.100	0.135

RECOMMENDED LAND PATTERN

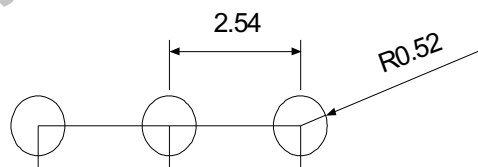


UNIT: mm

Note: Follow JEDEC TO-220 AB.

TM85P06P

P-Channel Enhancement Mosfet

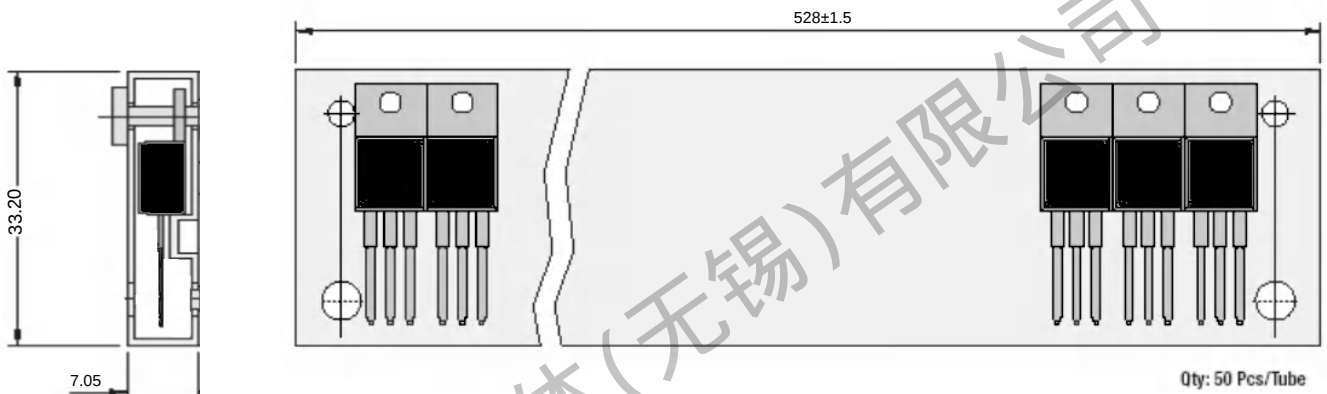

All Dimensions are in mm


1.TO-220AB Packaging

Package	Packing Form	Quantity		
		Tube	Inner Box [kpcs]	Outbox [kpcs]
TO-220AB	Tube Tape	50	5	1

TM85P06P

P-Channel Enhancement Mosfet


Inner Box

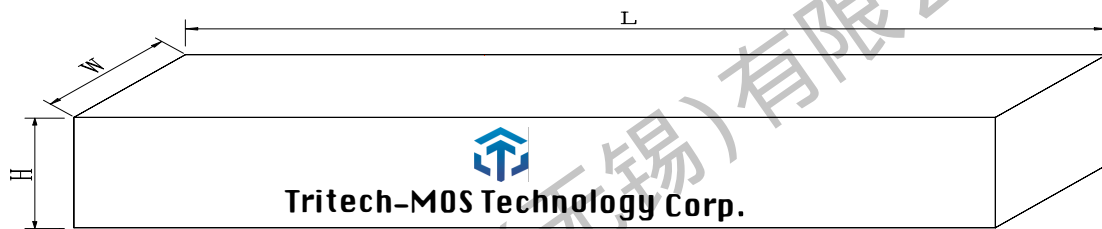

Dimension : 580 (L)×154(W) ×49(H) mm

Quantity : 50 ×20Ea = 1Kpcs

Outer Box

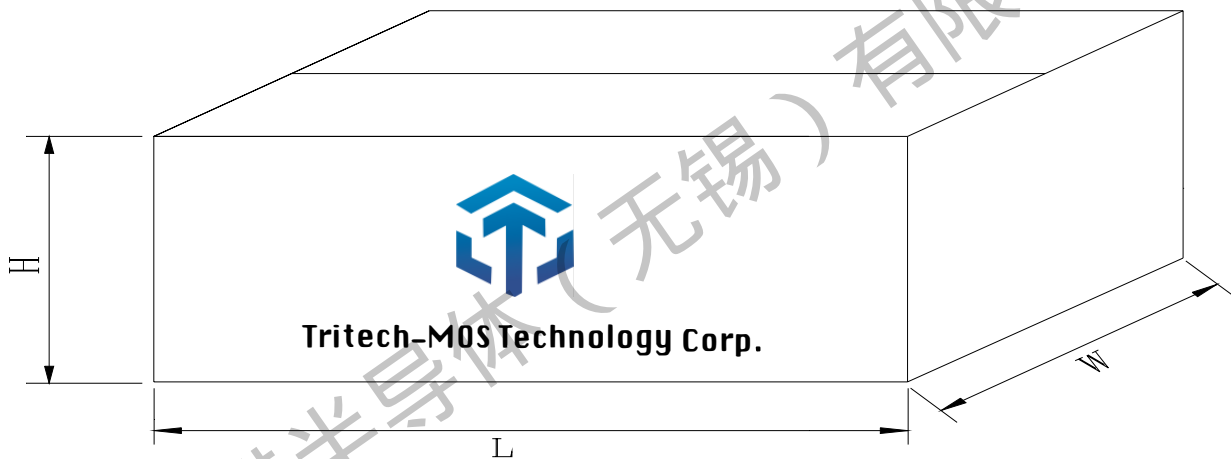

Dimension : 595(L)×285(W) ×185(H) mm

Quantity : 1K×5Ea = 5Kpcs

Important Notices and Disclaimers

- Tritech-MOS Technology Corp. reserves the right to change this document, its products, and specifications at any time without prior notice.
- Before final design, purchase, or use, customers should obtain and confirm the latest product information and specifications.
- Tritech-MOS Technology Corp. makes no warranties, representations or warranties regarding the suitability of its products for any specific purpose, and Tritech-MOS Technology Corp. does not assume any responsibility for application assistance or customer product design.
- Tritech-MOS Technology Corp. does not guarantee or assume any responsibility for the purchase or use of any unexpected or unauthorized products.
- Any intellectual property rights of Tritech-MOS Technology Corp. are not licensed through implicate or other means.
- Products of Tritech-MOS Technology Corp. are not included as critical components in life support equipment or systems without explicit written approval from Tritech-MOS Technology Corp.

Revision history:

Date	Rev	Description	Page
2023.08.30	23.08	Original	