
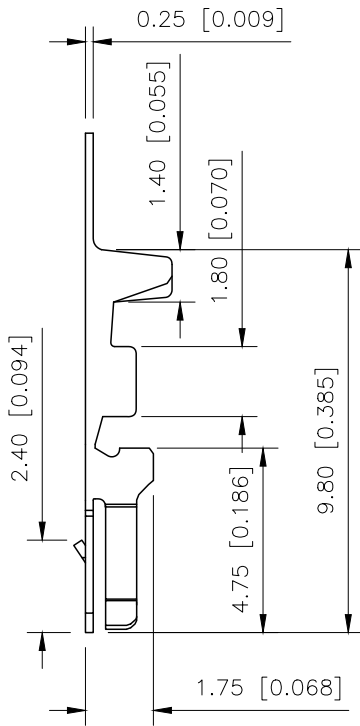





REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE		
A1	N/A		图面升级整理图面	2024.08.23	阿树

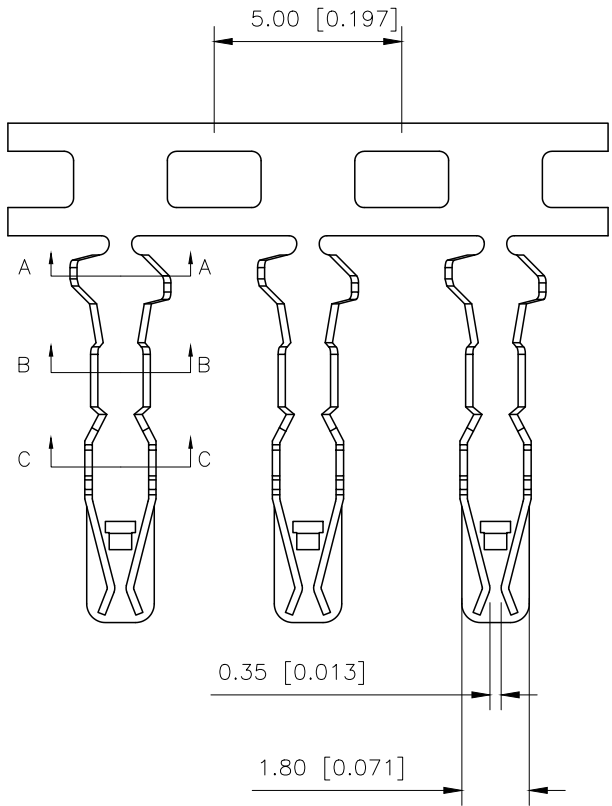

- SPECIFICATIONS
- Voltage rating:600V AC/DC
 - Current rating:19A AC/DC
 - Withstanding Voltage:5000V AC/minute
 - Temperature range:-40°C~+125°C
 - Insulation resistance:≥1000MΩ
 - Contact resistance:≤3.5mΩ

PART NO.:
X8826 T P-SN
① ② ③ ④

- 1.Series Number
2.Category:Terminal
3.Material:P-Phosphor bronze
4.Plating style:SN-Bright tin Plating



X8826T-PSN	X8826T-PSN	AWG#22-30	1.90mm(Max)	Stamping Before Plating:30u" Ni;70u" sn	X8826H
PART NO	Material	Wire Range	Insulation O.D	Finish	Suitable XKB Terminal

ANGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树
CHECKED	
APPROVED	

VIEW:	
UNIT:	mm/in
SIZE:	A4

MODEL TYPE:	2.5mm Crimp Style Connector
PART NO.:	X8826T-PSN
DWG NO.:	