

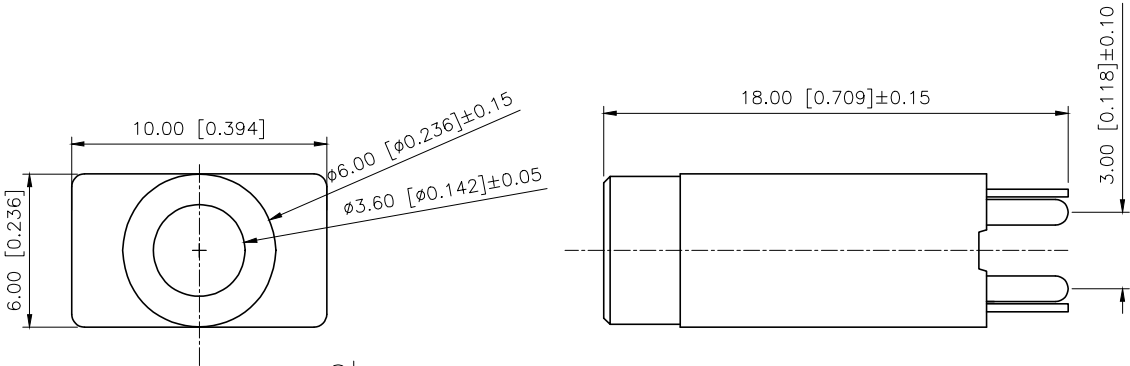
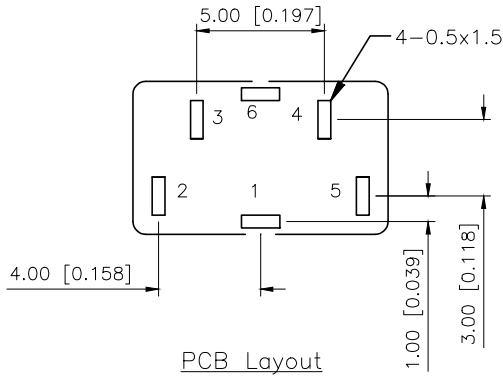


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.26	阿树

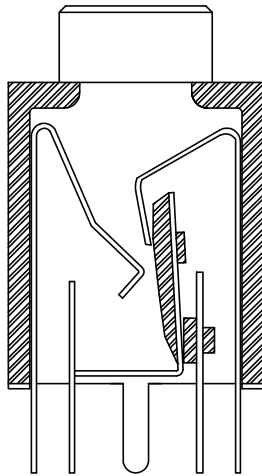

Temperature -20~70C
Rated Load DC30V 0.3A
Contact Resistance <30mΩ
Insulation Resistance >100MΩ
Withstand Voltage AC500V(50Hz)/min
Actuating Force 2.2~30N
Life 3000 Cycles

Model No.	PJ-359-X
Schematic	
color	B:Black W:White

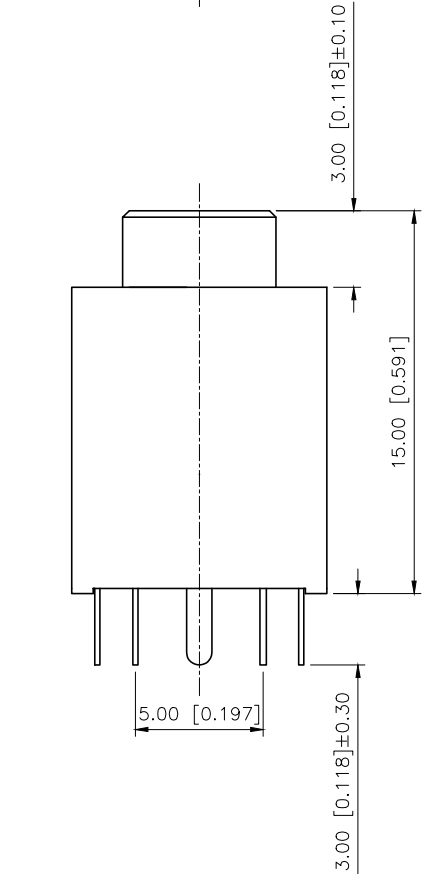

base	PBT	
Plastic	Pom	
Plastic	PA66	
Terminal 6	Phosphor Bronze	Ag
Terminal 5	Phosphor Bronze	Ag
Terminal 4	Phosphor Bronze	Ag
Terminal 3	Phosphor Bronze	Ag
Terminal 2	Phosphor Bronze	Ag
Terminal 1	Phosphor Bronze	Ag
PAPT NAMF	MATERIAL	PLATING

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN
CHECKED
APPROVED

阿树

VIEW:
UNIT: mm/in
SIZE: A4

MODEL TYPE:
3.5 PHONE JACK
PART NO.:
PJ-359-X
DWG NO.: