



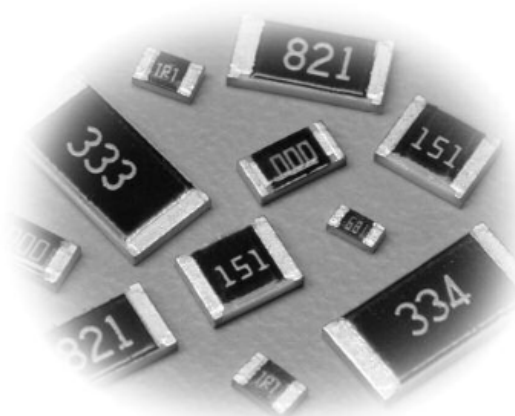


features

- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- AEC-Q200 Qualified: 0201 (1H), 0402 (1E), 0603 (1J), 0805 (2A), 1206 (2B), 1210 (2E), 2010 (2H/W2H), 2512 (3A/W3A/W3A2)


dimensions and construction

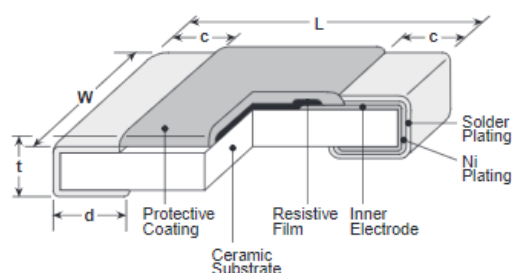

Derating Curve



For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.



For resistors operated at a terminal part temperature of described for each size or above, a power rating shall be derated in accordance with the above derating curve. Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog before use.

Type* (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
1F (01005)	.015±.001 (0.4±0.02)	.007±.001 (0.2±0.02)	.004±.001 (0.10±0.03)	.004±.001 (0.11±0.03)	.005±.001 (0.13±0.02)
1H (0201)	.024±.001 (0.6±0.03)	.012±.001 (0.3±0.03)	.004±.002 (0.1±0.05)	.006±.002 (0.15±0.05)	.009±.001 (0.23±0.03)
1E (0402)	.039 ^{+0.04 -.002} (1.0 ^{+0.1 -.05})	.02±.002 (0.5±0.05)	.008±.004 (0.2±0.1)	.01 ^{+0.02 -.004} (0.25 ^{+0.05 -.01})	.014±.002 (0.35±0.05)
1J (0603)	.063±.008 (1.6±0.2)	.031±.004 (0.8±0.1)	.012±.004 (0.3±0.1)	.012±.004 (0.3±0.1)	.018±.004 (0.45±0.1)
2A (0805)	.079±.008 (2.0±0.2)	.049±.004 (1.25±0.1)	.016±.008 (0.4±0.2)	.012 ^{+0.08 -.004} (0.3 ^{+0.2 -.01})	.02±.004 (0.5±0.1)
2B (1206)	.126±.008 (3.2±0.2)	.063±.008 (1.6±0.2)	.02±.012 (0.5±0.3)	.016 ^{+0.08 -.004} (0.4 ^{+0.2 -.01})	.024±.004 (0.6±0.1)
2E (1210)		.102±.008 (2.6±0.2)			
2H (2010)		.098±.008 (2.5±0.2)			
W2H (2010)		.026±.006 (0.65±0.15)			
3A (2512)	.248±.008 (6.3±0.2)	.122±.008 (3.1±0.2)		.016 ^{+0.08 -.004} (0.4 ^{+0.2 -.01})	
W3A/W3A2 (2512)			.026±.006 (0.65±0.15)		

* Parentheses indicate EIA package size codes.

ordering information

New Part #	RK73B	2B	T	TD	102	J
Type			Termination Material	Packaging	Nominal Resistance	Tolerance
		Size				
		1F	T: Sn (1F ~ W3A2)	TX: 01005 only: 4mm width - 1mm pitch plastic embossed	2 significant figures + 1 multiplier	G: ±2%
		1H		TBL: 01005 only: 2mm pitch pressed paper	"R" indicates decimal on value <10Ω	J: ±5%
		1E	Contact factory for below options:	TA: 0201 only: 1mm pitch pressed paper		
		1J	L: SnPb (1E, 1J, 2A, 2B, 2E, 2H, 3A)	TC: 0201 only: 7" 2mm pitch pressed paper (TC: 10,000 pcs/reel, TCM: 15,000 pcs/reel)		
		2A	G: Au (1E ~ 2A: 10Ω ~ 1MΩ)	TCD: 0201 only: 10" 2mm pitch pressed paper		
		2B		TPD: 0402 only: 10" plastic embossed		
		2E		TPL: 0402 only: 2mm pitch punched paper		
		W2H		TP: 0402, 0603 & 0805: 7" 2mm pitch punched paper		
		W3A		TD: 0603, 0805, 1206 & 1210: 7" 4mm pitch punched paper		
		2H		TDD: 0603, 0805, 1206 & 1210: 10" paper tape		
		3A		TE: 0805, 1206, 1210, 2010 & 2512: 7" plastic embossed		
		New W3A2		TED: 0805, 1206, 1210, 2010 & 2512: 10" plastic embossed		
				For further information on packaging, please refer to Appendix A		

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

10/31/17

applications and ratings

Part Designation	Power Rating	Rated Ambient Temp.	Rated Terminal Part Temp.	T.C.R. (x10 ⁻⁶ /K)	Resistance Range		Maximum Working Voltage	Maximum Overload Voltage	Operating Temperature Range
					G±2% E-24	J±5% E-24			
RK73B1F (01005)	0.03W	70°C	—	±200	100kΩ - 1MΩ	100kΩ - 10MΩ	20V	30V	-55°C to +125°C
				±250	10Ω - 91kΩ	10Ω - 91kΩ			
				0~+300	1Ω - 9.1Ω	1Ω - 9.1Ω			
RK73B1H (0201)	0.05W		±200	10Ω - 10MΩ	10Ω - 10MΩ	25V	50V	-55°C to +155°C	
			±400	—	1Ω - 9.1Ω				
RK73B1E (0402)	0.1W		±200	1Ω - 10MΩ	1Ω - 10MΩ	50V	100V		
			±200	1.1kΩ - 1MΩ	1.1kΩ - 10MΩ	75V			
RK73B1J (0603)	0.1W 0.125W		±400	—	11MΩ - 22MΩ				
			±200	1Ω - 1kΩ	1Ω - 1kΩ				
			±200	1Ω - 1MΩ	1Ω - 1MΩ	150V	200V		
RK73B2A (0805)	0.25W		±400	1.1MΩ - 10MΩ	1.1MΩ - 10MΩ				
			±200	1Ω - 5.6MΩ	1Ω - 5.6MΩ	200V	400V		
RK73B2B (1206)	0.25W		±400	6.2MΩ - 10MΩ	6.2MΩ - 22MΩ				
			±200	10Ω - 5.6MΩ	1Ω - 5.6MΩ				
RK73B2E (1210)	0.50W		±400	—	6.2MΩ - 10MΩ				
			±200	10Ω - 5.6MΩ	1Ω - 5.6MΩ				
RK73BW2H/2H (2010)	0.75W		±400	—	6.2MΩ - 22MΩ				
			±200	10Ω - 5.6MΩ	1Ω - 5.6MΩ	200V	400V		
RK73BW3A/3A (2512)	1.0W		±400	—	6.2MΩ - 22MΩ				
		NEW RK73BW3A2 (2512)	2.0W	—	95°C	±200	10Ω - 5.6MΩ		1Ω - 5.6MΩ
±400	—	6.2MΩ - 22MΩ							

Rated voltage = $\sqrt{\text{Power rating} \times \text{resistance value}}$ or max. working voltage, whichever is lower

If any questions arise on whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature" in your usage conditions, please give priority to the "Rated Terminal Part Temperature." Prior to use and for more details, refer to "Introduction of the derating curves based on the terminal part temperature" in the beginning of our catalog. Temperature rise at high power will depend on PCB layout. Be sure to contact factory prior to use and monitor terminal part temperature.

environmental applications

Performance Characteristics

Parameter	Requirement ΔR (%+0.1%)		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C and +25°C/+125°C
Overload (Short time)	±2%	±1%: 1F ±0.5%: Another	Rated Voltage x 2.5 for 5 seconds (1E, 2B, W3A2: Rated Voltage x 2 for 5 seconds)
Resistance to Soldering Heat	±1%: 1F~W3A2 (10Ω≤R≤1MΩ) ±3%: 1F~W3A2 (R<10Ω, R>1MΩ)	±0.5%: 1F~W3A2 (10Ω≤R≤1MΩ); ±1%: 1F~W3A2 (R<10Ω, R>1MΩ)	260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature	±1%: 1F ±0.5%: Another	±0.5%: 1F ±0.3%: Another	-55°C (30 minutes), +125°C (30 minutes), 100 cycles
Moisture Resistance	±2%: 1J, 2A, 2B ±3%: Another	±0.75%: 1J, 2A, 2B ±1.5%: 1F ±1%: Another	40°C ± 2°C, 90%-95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±2%: 1J, 2A, 2B ±3%: Another	±0.75%: 1J, 2A, 2B ±1%: Another	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±1%	±0.5%: 1F ±0.3%: Another	+125°C, 1000 hours: 1F; +155°C, 1000 hours: 1E, 1H, 1J, 2A, 2B, 2E, 2H/W2H, 3A/W3A/W3A2

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

10/31/17