

## Summary

[Request a quote](#)

[Catalog](#)

Number of contacts Low Voltage	7
Gender	Standard
Socket / Receptacle	Socket / Receptacle - Elbow
Locking system	Push-pull
Size	1P
Suggested matching part	<a href="#">PAG.M0.7GL.AC39G</a>
Series	REDEL P - Push-Pull

[https://www.lemo.com/int\\_en/solutions/redel/redel-p-push-pull/pxg-m0-7gg-ng.html](https://www.lemo.com/int_en/solutions/redel/redel-p-push-pull/pxg-m0-7gg-ng.html)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

# Technical details

## Electrical Configuration

Contact Termination Low voltage	PCB - Straight
R (max)	6.5 mOhm
Insert configuration value	1P.M07 - 7 Low Voltage
Insulator	G: PSU gray
Rated current	5 A
Test voltage (kV rms) Contact-contact	1.05
Contact Type	Print (straight)
Air clearance	0.85 mm
Creepage distance	0.85 mm
Contact Dia.	0.7 mm (0.0275in)
Number of contacts Low Voltage	7
Gender	Standard

## Form & Material

Shell style / Model id	PX - Elbow receptacle key (G) or keys (A,B,C) with two nuts for printed circuit
Socket / Receptacle	Elbow
Housing material	PSU (Polysulfone), gray
Locking system	Push-pull
Keying	1 key (alpha=0, Plug: male contact, Receptacle: female contact)
Colour	Gray
Variant	Gray front nut
Weight	8.51 g

[https://www.lemo.com/int\\_en/solutions/redel/redel-p-push-pull/pxg-m0-7gg-ng.html](https://www.lemo.com/int_en/solutions/redel/redel-p-push-pull/pxg-m0-7gg-ng.html)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.


## Environment

Technical domain	Energy and Industrial, Medical, Test and Measurement, Transportation, Aerospace and UAV
Environmental sealing (IP rating)	IP50
Endurance	> 5000 mating cycles
Temperature range	-50°C / +150°C
F ret (max)	150 N
F ret (min)	50 N
Steam sterilization	Fully sterilizable (Steam, Gamma, ETO) following our protocols and tests in line with ISO 11134 and IEC 60601-1 standards. For more details on sterilization methods and cycles, please contact us.

## Cable fixation

Cable termination protection	Standard back nut (no additional protection)
Fixation type	Cable collet

# Drawings

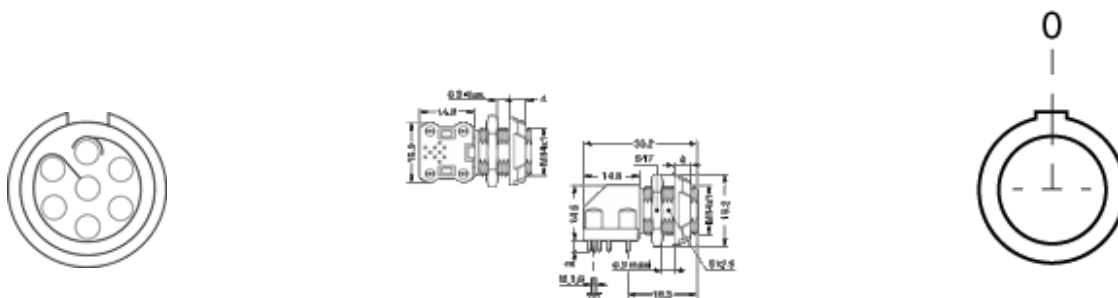

## Dimensions

	<b>L</b>	<b>A</b>	<b>e</b>	<b>E</b>	<b>S1</b>	<b>S2</b>
mm.	30.2	19.2	M14x1	6.9 max	S12.5	S17
in.	1.19	0.76				

[https://www.lemo.com/int\\_en/solutions/redel/redel-p-push-pull/pxg-m0-7gg-ng.html](https://www.lemo.com/int_en/solutions/redel/redel-p-push-pull/pxg-m0-7gg-ng.html)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.