



FEMALE FACE VIEW

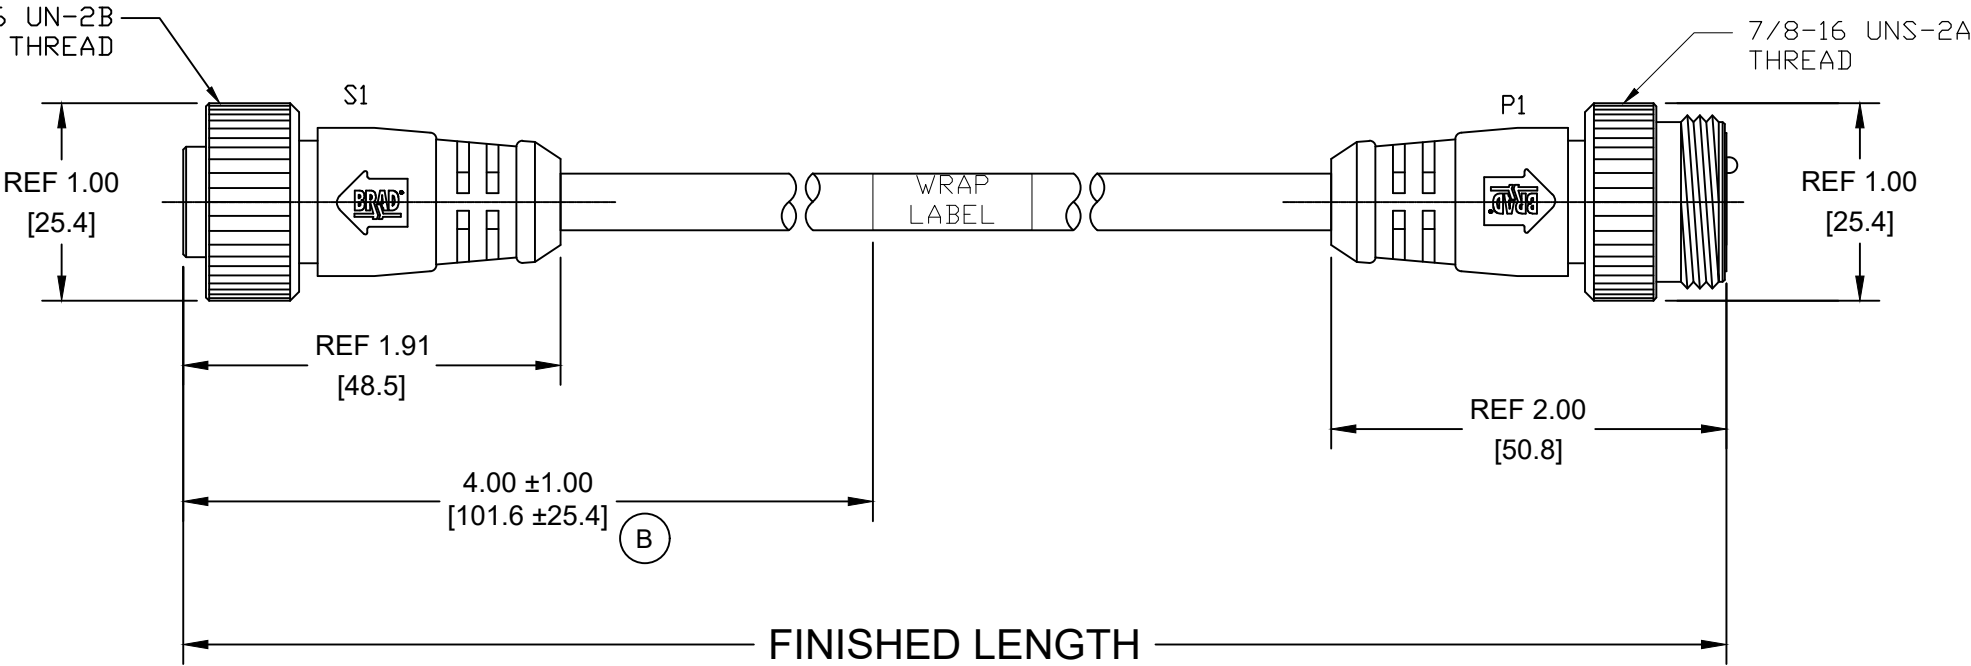

MALE FACE VIEW

114030A05MXXX

LENGTH

- 010 - 1M
- 050 - 5M
- 200 - 20M

S1		P1
1	BLACK	1
2	BLUE	2
3	BROWN	3
4	WHITE	4

WIRING DIAGRAM

NOTES:

MECHANICAL
CONTACT : GOLD/NICKEL OVER COPPER ALLOY
INSERT : YELLOW PVC
COUPLING NUT: BLACK ELECTROPHORETIC COATING OVER ZINC DIECAST
MOLDED BODY: YELLOW PVC
CABLE: 18 AWG 4 CONDUCTORS YELLOW PVC JACKET
WRAP LABEL: YELLOW VINYL

ELECTRICAL
VOLTAGE RATING: 300V AC/DC
AMPERAGE: 5.6A (B)

ENVIRONMENTAL
OPERATION TEMP: 80°C

FUNCTIONAL SYMBOLS F/A=0 F/C=0 F/D=0 DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												
	DIMENSION UNITS INCH		SCALE 1:1		CURRENT REV DESC: CHANGE AMP RATING. FROM 7 TO 5.6 AMPS, UPDATE TITLE BLOCK, DIMENSIONS IN INCHES-MM, ADD CENTER LINES			molex					
	GENERAL TOLERANCES (UNLESS SPECIFIED)												
	4 PLACES ±----		±----		EC NO: 779100			MINI CHANGE ASSEMBLY 4 POLE MALE/FEMALE ST/ST 18/4C AWG PVC YELLOW					
	3 PLACES ±----		±0.005		DRWN: LESPINOZA 2024/03/04								
2 PLACES ±0.13		±0.01		CHK'D: HENRYB1 2024/03/04			PRODUCT CUSTOMER DRAWING						
1 PLACE ±0.25		±----		APPR: BWOODMAN 2024/05/13									
0 PLACES ±----		±----		INITIAL REVISION:			DOCUMENT NUMBER			DOC TYPE DOC PART REVISION			
ANGULAR TOL ± 0.5 °		±----		DRWN: BARDEN 2013/02/06			SD-130010-026			PSD 001 B			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING B-SIZE		SERIES 130010		MATERIAL NUMBER		CUSTOMER GENERAL MARKET		SHEET NUMBER 1 OF 1	