




Terminals & Splices > Quick Disconnects

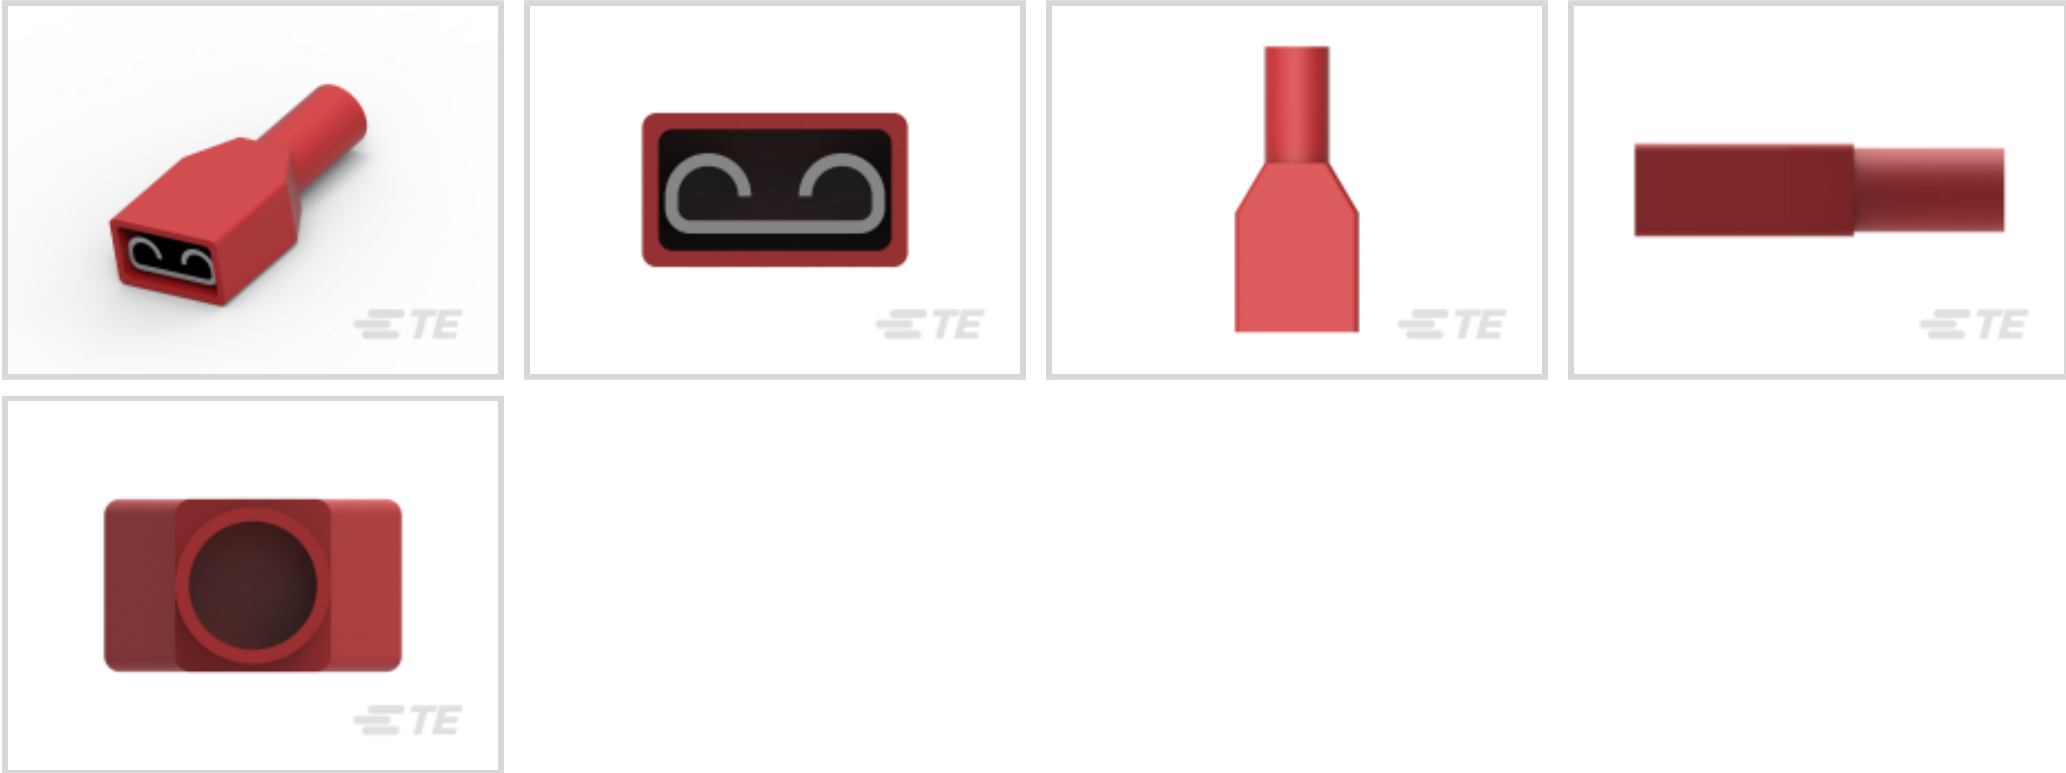

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **1980 – 3260 CMA**

Mating Tab Width: **6.35 mm [.25 in]**

Features

Product Type Features

Insertion Force	Normal
-----------------	--------

Electrical Characteristics

Voltage Rating	300 V
----------------	-------

Body Features

Insulation Material	Nylon
---------------------	-------

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm[.25 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	Compression
Barrel Type	Closed

Mechanical Attachment

Wire Insulation Support	With
Mating Retention Type	Dimple



Dimensions

Product Length	21.6 mm[.85 in]
Compatible Insulation Diameter Range	3.3 mm[.13 in]
Wire Size	1980 – 3260 CMA

Usage Conditions

Insulation Option	Fully Insulated
Operating Temperature Range	105 °C[221 °F]

Packaging Features

Packaging Quantity	100
Packaging Method	Bag

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




TE Part # 47386
DAHT PG PIDG 26-16 ASSY

Customers Also Bought



TE Part #1745013-1
12 POS.RECEPTACLE CONNECTOR
FOR 070 MULT

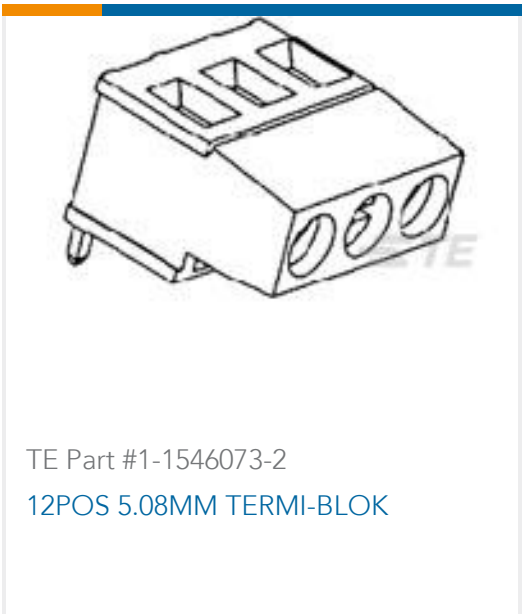

TE Part #1-1546073-2
12POS 5.08MM TERMI-BLOK



TE Part #1-1658019-1
MSB0.80PL25ASY28DP,-,10,VCTY




TE Part #1-2318701-1
34WAY IN-LINE CAP ASSY, KEY A
BLKD




TE Part #1-87160-0
09 MODI HDR SRST .156CL



TE Part #2355179-6
6P,2MM,BRK HDR,SRVT,2.8,0.38AU,TB
W/CAP

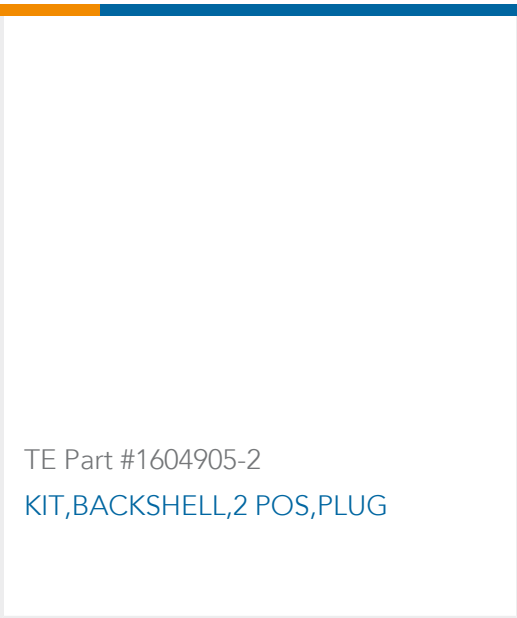

TE Part #1604905-2
KIT,BACKSHELL,2 POS,PLUG

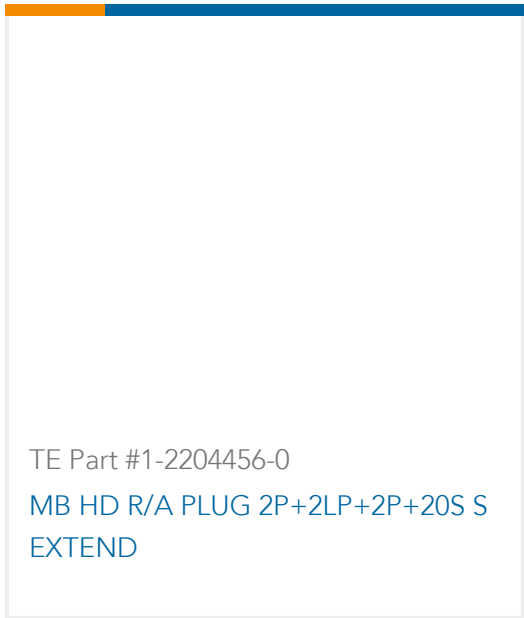

TE Part #1-2204456-0
MB HD R/A PLUG 2P+2LP+2P+20S S
EXTEND

Documents

Product Drawings
SMP 0-0735278-0

English

CAD Files
3D PDF

3D

Customer View Model
ENG_CVM_CVM_1-1377175-2_G1.2d_dxf.zip

English

Customer View Model
ENG_CVM_CVM_1-1377175-2_G1.3d_igs.zip

English

Customer View Model
ENG_CVM_CVM_1-1377175-2_G1.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.



Product Specifications

Application Specification

English