


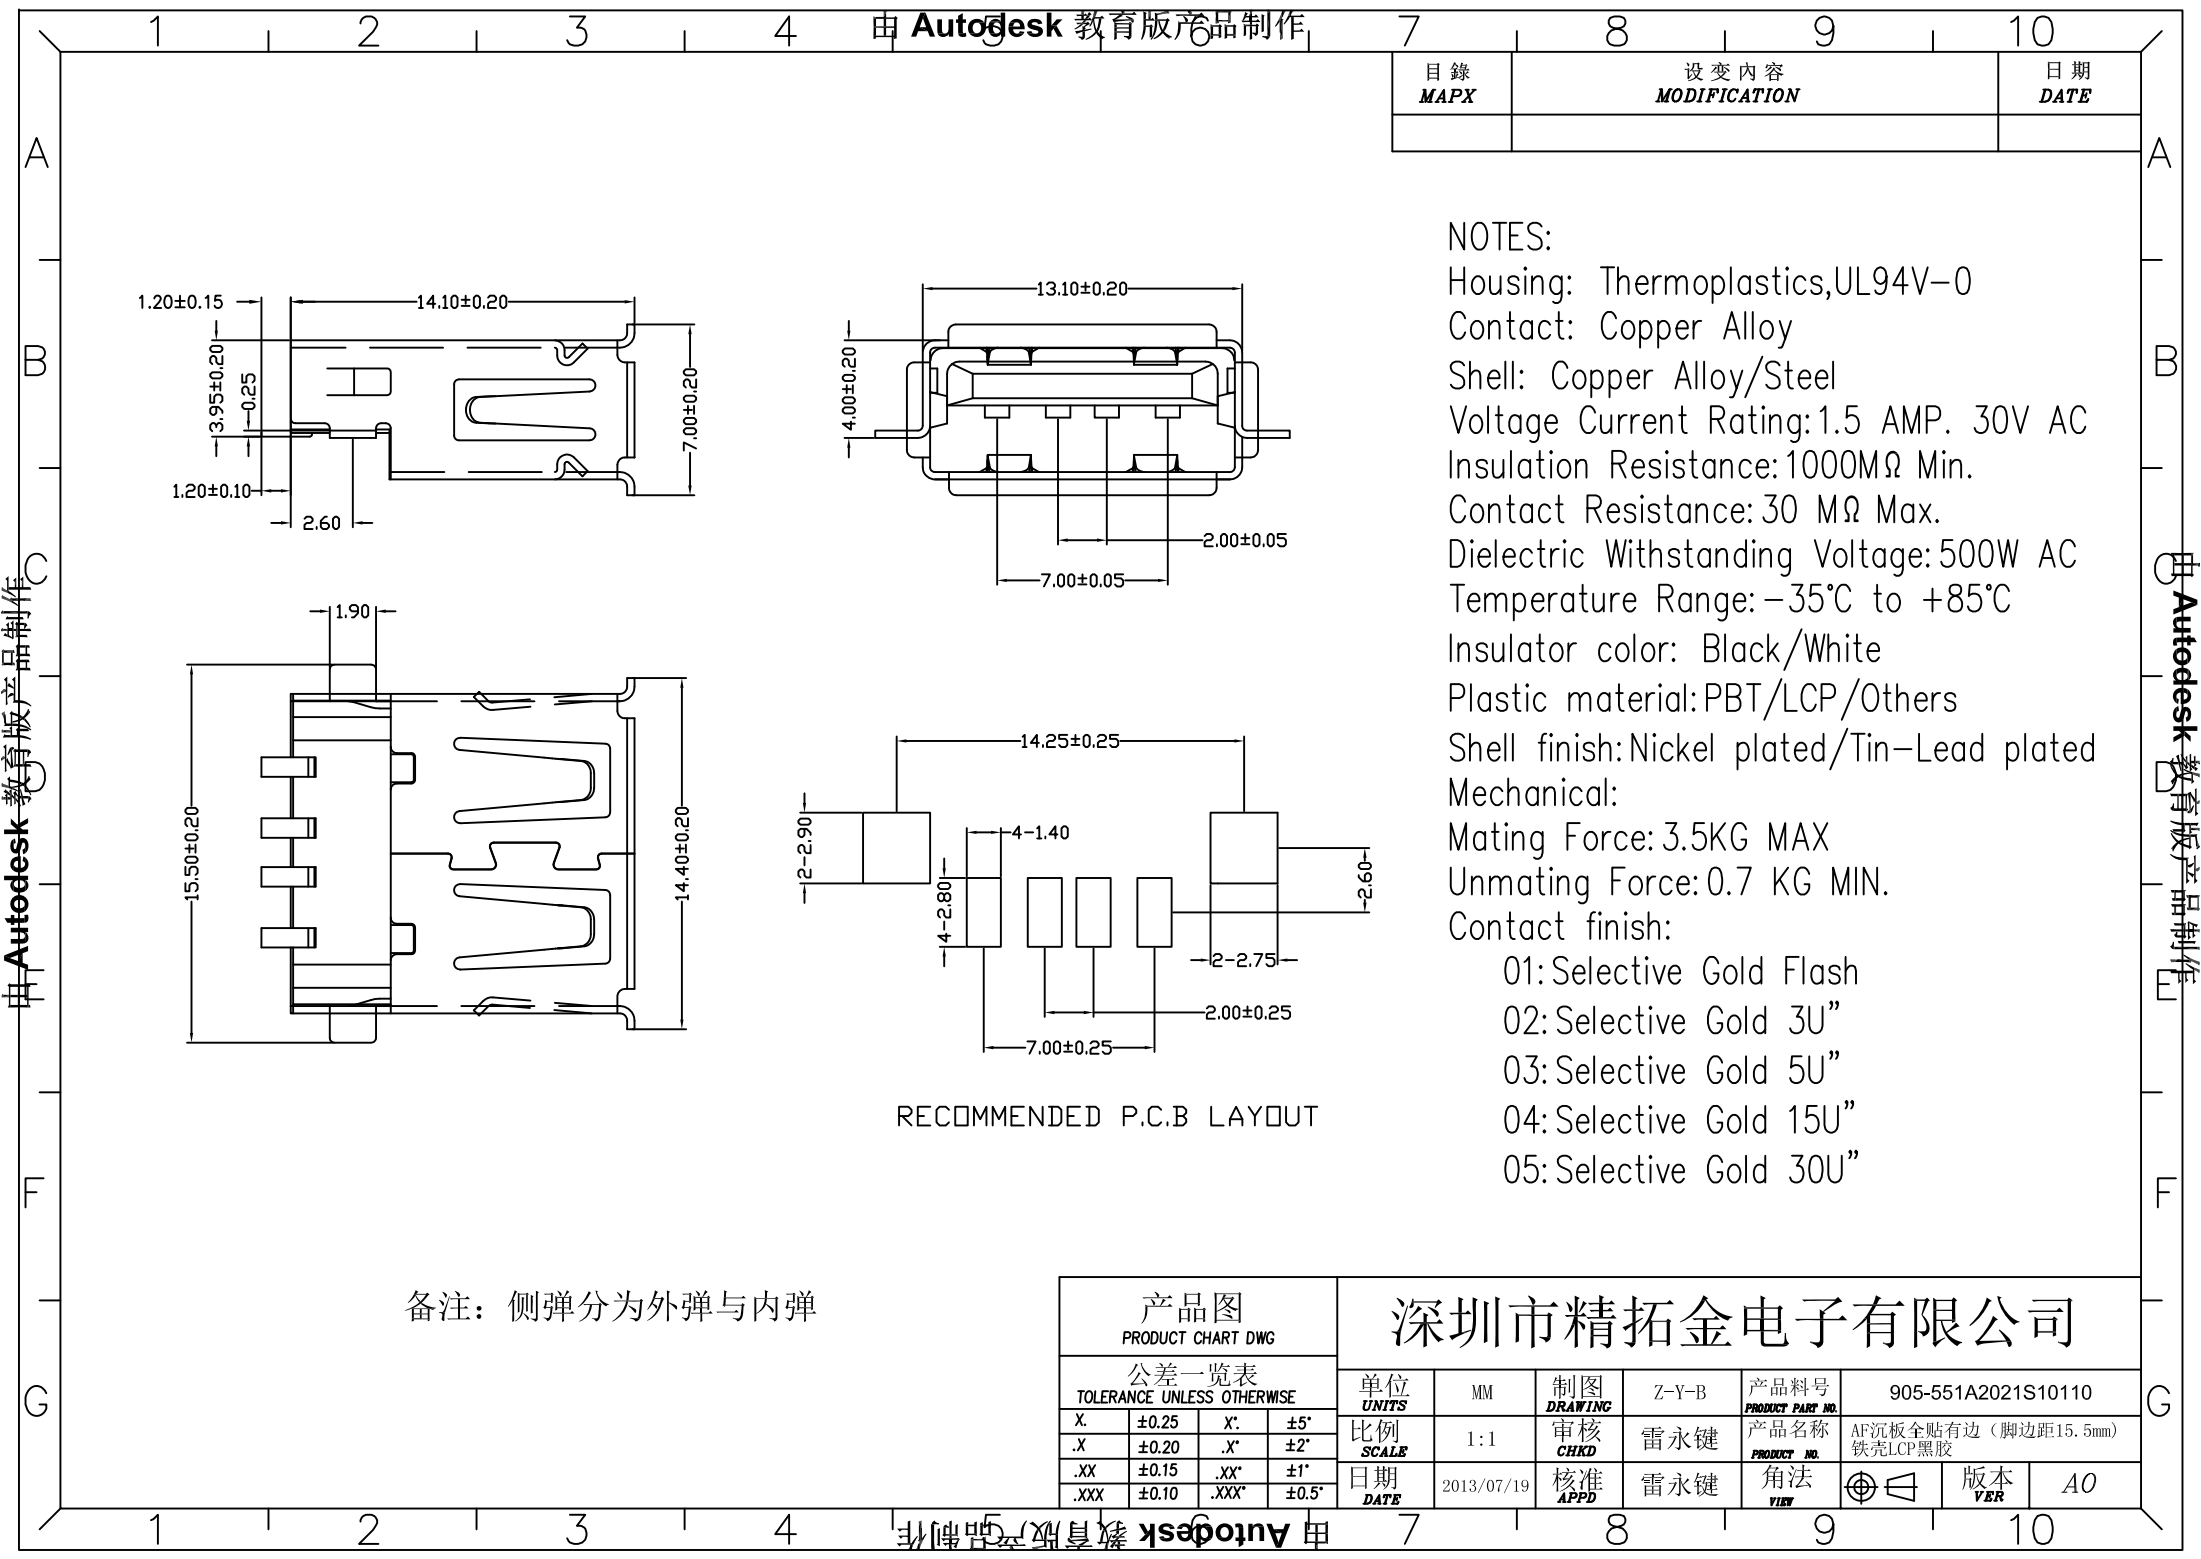

备注：侧弹分为外弹与内弹

目錄 MAPX	设变内容 MODIFICATION	日期 DATE

NOTES:
Housing: Thermoplastics,UL94V-0
Contact: Copper Alloy
Shell: Copper Alloy/Steel
Voltage Current Rating:1.5 AMP. 30V AC
Insulation Resistance:1000MΩ Min.
Contact Resistance:30 MΩ Max.
Dielectric Withstanding Voltage:500W AC
Temperature Range:-35℃ to +85℃
Insulator color: Black/White
Plastic material:PBT/LCP/Others
Shell finish:Nickel plated/Tin-Lead plated
Mechanical:
Mating Force: 3.5KG MAX
Unmating Force:0.7 KG MIN.
Contact finish:
01: Selective Gold Flash
02: Selective Gold 3U”
03: Selective Gold 5U”
04: Selective Gold 15U”
05: Selective Gold 30U”

RECOMMENDED P.C.B LAYOUT

产品图 PRODUCT CHART DWG				深圳市精拓金电子有限公司					
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	Z-Y-B	产品料号 PRODUCT PART NO.	905-551A2021S10110
X.	±0.25	X'.	±5'	比例 SCALE	1:1	审核 CHKD	雷永键	产品名称 PRODUCT NO.	AF沉板全贴有边（脚边距15.5mm） 铁壳LCP黑胶
.X	±0.20	.X'.	±2'					角法 VIEW	⊕ ⊖
.XX	±0.15	.XX'.	±1'					版本 VER	A0
.XXX	±0.10	.XXX'.	±0.5'	日期 DATE	2013/07/19	核准 APPD	雷永键		