

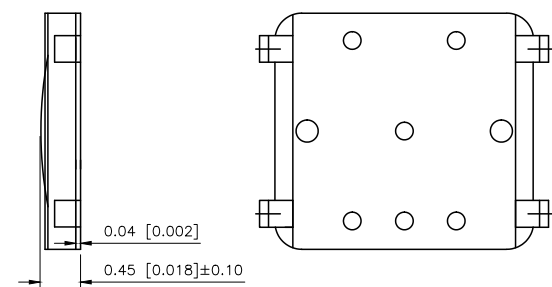
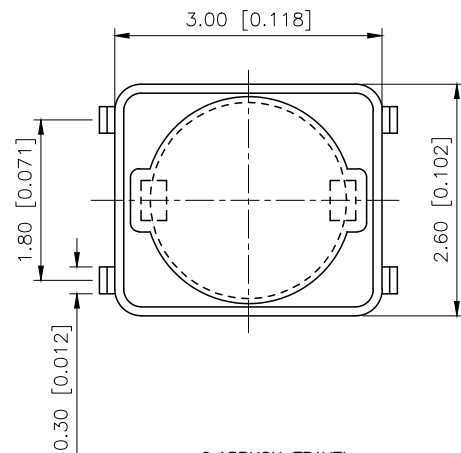

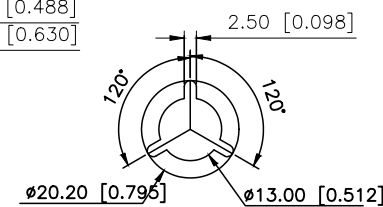



REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.06	阿树



- 1.RATING:DC 12V,50mA Max
- 2.TRAVEL:0.15±0.05mm
- 3.LIFE:300,000cycles
- 4.PACKAGE:5000Pcs/Reel

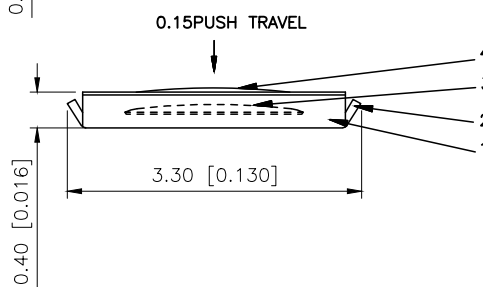


CIRCUIT DIAGRAM



SC 1:150

DETAL:A
SC
10:1

PAPT NO	TS-2630A-X
Operating Force	B:200gf C:260gf
Height	H:0.45

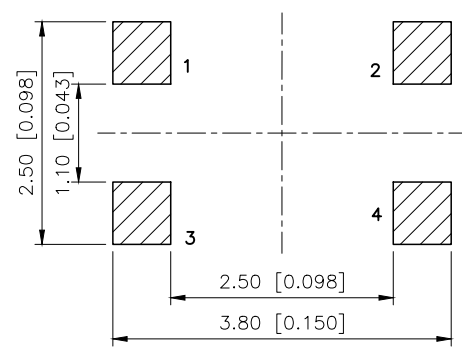

Recommended PAD Layout
Recommended solder thickness T=0.1±0.01

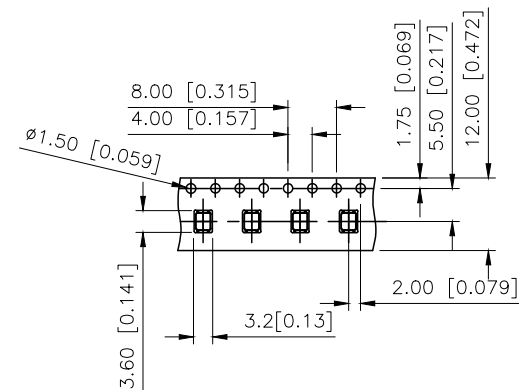

⑤	Terminal	4	Brass (0.30t)	AG Plated
④	Contact	2	F.ag/Sus	
③	Base	1	LCP	
②	Cover	1	Kapton	Tin plated
①	Keystone	1	PET	
ITEM	PAPT NAME	QTY	MATERIAL	FINISHING

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE:
CHECKED		UNIT: mm/in	PART NO.:
APPROVED		SIZE: A4	DWG NO.:

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1