

200mA High Speed LDO Voltage Regulator with Inrush Current Prevention

■ GENERAL DESCRIPTION

The XC6233 series is a 200mA high speed LDO regulator that features high accurate high ripple rejection and low dropout. The series consists of a voltage reference, an error amplifier, a driver transistor, a current limiter, a phase compensation circuit and an inrush current prevention circuit.

The output voltage is selectable in 0.05V increments (Accuracy $\pm 1\%$) within the range of 1.2V to 3.6V.

The CE function enables the circuit to be in stand-by mode as well as the electric charge at the output capacitor C_L to be discharged via the internal switch, and the V_{OUT} pin quickly returns to the Low level.

The series is also compatible with low ESR ceramic capacitors, which provides stable output voltage. This stability can be maintained even during load fluctuations due to the excellent transient response.

The over current prevention circuit will operate when the output current reaches the current limit.


■ APPLICATIONS

- Mobile devices / terminals
- Modules (wireless, cameras, etc.)
- Smart phones / Mobile phones


■ FEATURES

Maximum Output Current	: 200mA
Input Voltage Range	: 1.7V~5.5V
Output Voltage Range	: 1.2V~3.6V ($\pm 1\%$) 0.05V increments
Dropout Voltage	: 240mV @ $I_{OUT}=200mA$ ($V_{OUT}=3.0V$)
Low Power Consumption	: 45 μA (TYP.)
Stand-by Current	: 0.1 μA
High Ripple Rejection	: 75dB@1kHz
CE Pin Function	: Active High C_L Auto Discharge
Protection Circuit	: Current Limit 255mA (TYP.) Short Circuit Protection 60mA (TYP.)
External Capacitor	: Ceramic Capacitor Compatible 1.0 μF
Operating Ambient Temperature	: $-40^{\circ}C \sim +85^{\circ}C$
Packages	: USP-4 SSOT-24 SOT-25 USPQ-4B04
Environmentally Friendly	: EU RoHS Compliant, Pb Free

■ TYPICAL APPLICATION CIRCUIT

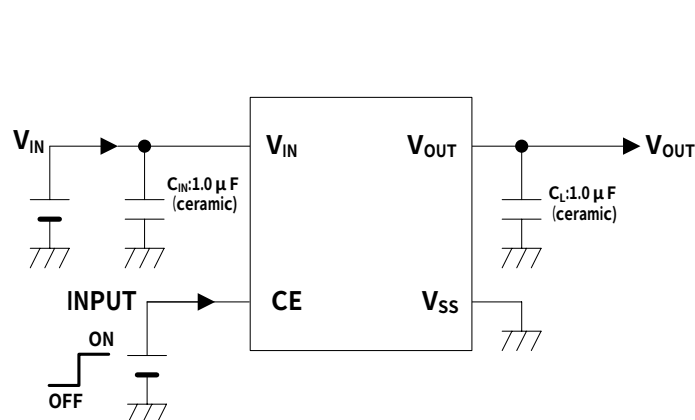


■ TYPICAL PERFORMANCE CHARACTERISTICS

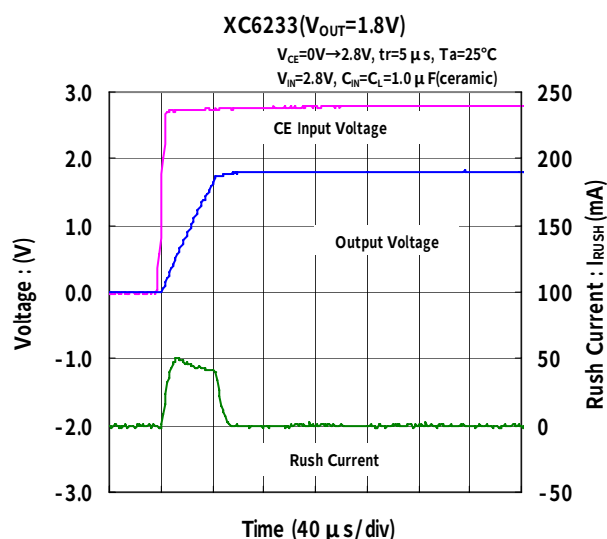

■ BLOCK DIAGRAM

XC6233 Series, Type H

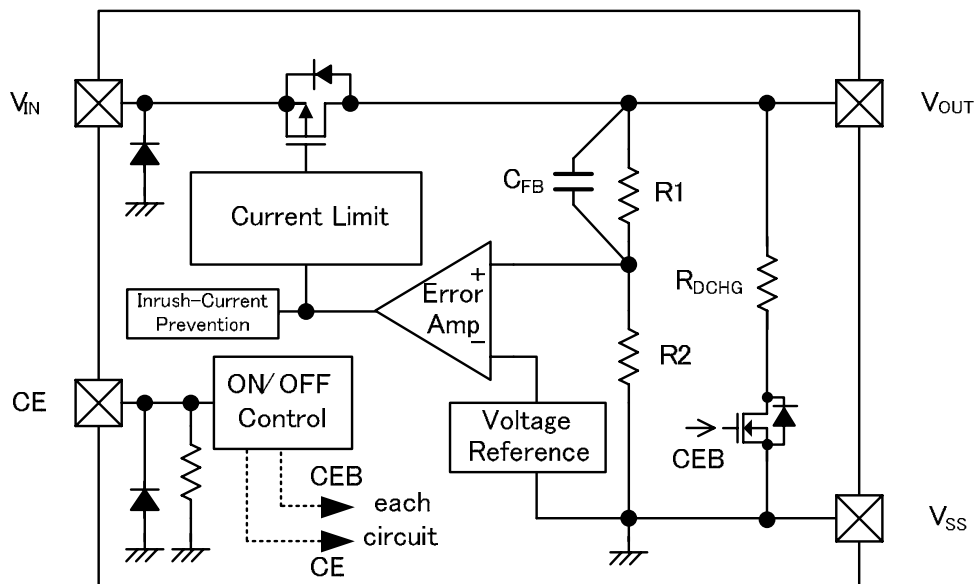

* Diodes inside the circuits are ESD protection diodes and parasitic diodes.

■PRODUCT CLASSIFICATION

●Ordering Information

XC6233①②③④⑤⑥-⑦

DESIGNATOR	ITEM	SYMBOL	DESCRIPTION
①	Type of Regulator CE Active High	H	Refer to Function Guide
②③	Output Voltage	12~36	ex.) 2.80V → ②=2, ③=8 ④=please see down below
④	Output Voltage Accuracy	1	0.10V increments, ±1% ($V_{OUT} \geq 2.00V$), ±0.02V ($V_{OUT} < 2.00V$) e.g. 2.80V → ④=1
		B	0.05V increments, ±1% ($V_{OUT} \geq 2.05V$), ±0.02V ($V_{OUT} < 2.05V$) e.g. 2.85V → ④=B
⑤⑥-⑦ (*1)	Packages (Order Unit)	9R-G	USPQ-4B04 (3000/Reel)
		GR-G	USP-4 (3000/Reel)
		NR-G	SSOT-24 (3000/Reel)
		MR-G	SOT-25 (3000/Reel)

(*1) The "-G" suffix denotes Halogen and Antimony free as well as being fully EU RoHS compliant.

For another type of regulators, please contact your local Torex sales office or representative.

●Function Guide

TYPE	CURRENT LIMITER	CE PULL-DOWN RESISTOR	C _L AUTO-DISCHARGE	INRUSH CURRENT PREVENTION
H	Yes	Yes	Yes	Yes


■STANDARD VOLTAGE

●Examples for standard voltage


V _{OUT} (V)	PACKAGES			
	USPQ-4B04	USP-4	SSOT-24	SOT-25
1.20	XC6233H1219R-G	XC6233H121GR-G	XC6233H121NR-G	XC6233H121MR-G
1.50	XC6233H1519R-G	XC6233H151GR-G	XC6233H151NR-G	XC6233H151MR-G
1.80	XC6233H1819R-G	XC6233H181GR-G	XC6233H181NR-G	XC6233H181MR-G
2.80	XC6233H2819R-G	XC6233H281GR-G	XC6233H281NR-G	XC6233H281MR-G
3.30	XC6233H3319R-G	XC6233H331GR-G	XC6233H331NR-G	XC6233H331MR-G

Output voltages can be set internally from 1.2V to 3.6V. For other voltages, please contact your local Torex sales office or representative.


PIN CONFIGURATION




USPQ-4B04
(BOTTOM VIEW)



USP-4
(BOTTOM VIEW)



SSOT-24
(TOP VIEW)



SOT-25
(TOP VIEW)

* The dissipation pad for the USP-4 and USPQ-4B04 packages should be solder-plated in reference mount pattern and metal masking so as to enhance mounting strength and heat release. If the pad needs to be connected to other pins, it should be connected to the V_{SS} (No. 2) pin.

PIN ASSIGNMENT

PIN NUMBER				PIN NAME	FUNCTIONS
USPQ-4B04	USP-4	SSOT-24	SOT-25		
1	1	3	5	V_{OUT}	Output
2	2	2	2	V_{SS}	Ground
3	3	1	3	CE	ON/OFF Control
4	4	4	1	V_{IN}	Power Supply Input
-	-	-	4	NC	No Connection

PIN FUNCTION ASSIGNMENT

PIN NAME	SIGNAL	STATUS
CE	L	Stand-by
	H	Active
	OPEN	Stand-by *

* For type H, CE pin voltage is fixed as L level because of internal pull-down resistor.

■ ABSOLUTE MAXIMUM RATINGS

Ta=25°C

PARAMETER		SYMBOL	RATINGS	UNITS
Input Voltage		V _{IN}	-0.3~+6.0	V
Output Current		I _{OUT}	275 ^{(*)1}	mA
Output Voltage		V _{OUT}	-0.3~V _{IN} +0.3 or +6.0 ^{(*)2}	V
CE Input Voltage		V _{CE}	-0.3~+6.0	V
Power Dissipation	USPQ-4B04	Pd	550 (PCB mounted) ^{(*)3}	mW
	USP-4		1000 (PCB mounted) ^{(*)3}	
	SSOT-24		500 (PCB mounted) ^{(*)3}	
	SOT-25		600 (PCB mounted) ^{(*)3}	
Operating Ambient Temperature		Topr	-40~+85	°C
Storage Temperature		Tstg	-55~+125	°C

All voltages are described based on the V_{SS}.

^{(*)1} Please use within the range of $I_{OUT} \leq Pd / (V_{IN} - V_{OUT})$

^{(*)2} The maximum rating corresponds to the lowest value between V_{IN}+0.3 or +6.0.

^{(*)3} This is a reference data taken by using the test board. Please refer to page 26 to 29 for details.

ELECTRICAL CHARACTERISTICS

XC6233 Series

Ta=25°C

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS	CIRCUIT
Output Voltage	$V_{OUT(E)}^{(*)1}$	$V_{OUT(T)} \geq 2.0V$	$V_{OUT(T)} \times 0.99^{(*)2}$	$V_{OUT(T)}^{(*)2}$	$V_{OUT(T)} \times 1.01^{(*)2}$	V	①
		“E-0” ^{(*)3}					
		$V_{OUT(T)} < 2.0V$	$V_{OUT(T)} - 0.02^{(*)2}$	$V_{OUT(T)}^{(*)2}$	$V_{OUT(T)} + 0.02^{(*)2}$		
		“E-0” ^{(*)3}					
Maximum Output Current	I_{OUTMAX}	-	200	-	-	mA	①
Load Regulation	ΔV_{OUT}	$0.1mA \leq I_{OUT} \leq 200mA$	-	25	45	mV	①
Dropout Voltage	$V_{dif}^{(*)4}$	$I_{OUT} = 200mA$	-	“E-1” ^{(*)5}		mV	①
Supply Current	I_{DD}	$I_{OUT} = 0mA$	-	45	87	μA	②
Stand-by Current	I_{STB}	$V_{CE} = V_{SS}$	-	0.01	0.10	μA	②
Line Regulation	$\frac{\Delta V_{OUT}}{(\Delta V_{IN} \cdot V_{OUT})}$	$V_{OUT(T)} < 2.0V, I_{OUT} = 30mA$	-	0.02	0.10	% / V	①
		$2.5V \leq V_{IN} \leq 5.5V$					
		$V_{OUT(T)} \geq 2.0V, I_{OUT} = 30mA$					
		$V_{OUT(T)} + 0.5V \leq V_{IN} \leq 5.5V$					
Input Voltage	V_{IN}	-	1.7	-	5.5	V	①
Output Voltage Temperature Characteristics	$\frac{\Delta V_{OUT}}{(\Delta T_{opr} \cdot V_{OUT})}$	$I_{OUT} = 10mA$ $-40^{\circ}C \leq T_{opr} \leq 85^{\circ}C$	-	± 80	-	ppm/°C	①
Power Supply Rejection Ratio	PSRR	$V_{OUT(T)} < 2.5V$ $V_{IN} = 3.0V_{DC} + 0.5V_{p-pAC}$ $V_{CE} = V_{OUT(T)} + 1.0V$ $I_{OUT} = 30mA, f = 1kHz$	-	75	-	dB	③
		$V_{OUT(T)} \geq 2.5V$ $V_{IN} = \{V_{OUT(T)} + 1.0\} + 0.5V_{p-pAC}$ $V_{CE} = V_{OUT(T)} + 1.0V$ $I_{OUT} = 30mA, f = 1kHz$					
Current Limit	I_{LIM}	-	200	255	-	mA	①
Short Current	I_{SHORT}	$V_{OUT} = V_{SS}$	-	60	-	mA	①
CE "H" Level Voltage	V_{CEH}	-	0.9	-	5.5	V	①
CE "L" Level Voltage	V_{CEL}	-	V_{SS}	-	0.3	V	①
CE "H" Level Current (Type H)	I_{CEH}	$V_{CE} = V_{IN} = 5.5V$	2.5	6.0	9.5	μA	①
CE "L" Level Current	I_{CEL}	$V_{CE} = V_{SS}$	-0.1	-	0.1	μA	①
C_L Auto-Discharge Resistance	R_{DCHG}	$V_{IN} = 5.5V, V_{CE} = V_{SS}, V_{OUT} = 2.0V$	-	270	-	Ω	①
Inrush Current	I_{RUSH}	$V_{IN} = 5.5V, V_{CE} = 0 \rightarrow 5.5V$	-	95	-	mA	④

NOTE:

Unless otherwise stated, $V_{IN} = V_{OUT(T)} + 1V$, $V_{CE} = V_{IN}$, $I_{OUT} = 1mA$

(*)1 $V_{OUT(E)}$ is Effective output voltage

(*)2 $V_{OUT(T)}$ is Nominal output voltage

(*)3 E-0: OUTPUT VOLTAGE (Refer to the Voltage Chart)

(*)4 $V_{dif} = \{V_{IN1} - V_{OUT1}\}$

V_{IN1} is the input voltage when V_{OUT1} appears at the V_{OUT} pin while input voltage is gradually decreased.

V_{OUT1} is the voltage equal to 98% of the normal output voltage when amply stabilized $V_{OUT(T)} + 1.0V$ is input at the V_{IN} pin.

(*)5 E-1: DROPOUT VOLTAGE (Refer to the Voltage Chart)

■ ELECTRICAL CHARACTERISTICS (Continued)

Voltage Chart


NOMINAL OUTPUT VOLTAGE	E-0		E-1	
	OUTPUT VOLTAGE (V)		DROPOUT VOLTAGE (mV)	
	$V_{OUT(E)}$		V_{dif}	
$V_{OUT(T)}$	MIN.	MAX.	TYP.	MAX.
1.20	1.1800	1.2200	680	950
1.25	1.2300	1.2700		
1.30	1.2800	1.3200	640	800
1.35	1.3300	1.3700		
1.40	1.3800	1.4200	600	695
1.45	1.4300	1.4700		
1.50	1.4800	1.5200		
1.55	1.5300	1.5700		
1.60	1.5800	1.6200	510	630
1.65	1.6300	1.6700		
1.70	1.6800	1.7200		
1.75	1.7300	1.7700	400	600
1.80	1.7800	1.8200		
1.85	1.8300	1.8700		
1.90	1.8800	1.9200		
1.95	1.9300	1.9700	375	520
2.00	1.9800	2.0200		
2.05	2.0295	2.0705		
2.10	2.0790	2.1210		
2.15	2.1285	2.1715		
2.20	2.1780	2.2220		
2.25	2.2275	2.2725		
2.30	2.2770	2.3230		
2.35	2.3265	2.3735		
2.40	2.3760	2.4240		
2.45	2.4255	2.4745		

NOMINAL OUTPUT VOLTAGE	E-0		E-1	
	OUTPUT VOLTAGE (V)		DROPOUT VOLTAGE (mV)	
	$V_{OUT(E)}$		V_{dif}	
$V_{OUT(T)}$	MIN.	MAX.	TYP.	MAX.
2.50	2.4750	2.5250	310	420
2.55	2.5245	2.5755		
2.60	2.5740	2.6260		
2.65	2.6235	2.6765		
2.70	2.6730	2.7270		
2.75	2.7225	2.7775		
2.80	2.7720	2.8280		
2.85	2.8215	2.8785		
2.90	2.8710	2.9290		
2.95	2.9205	2.9795		
3.00	2.9700	3.0300	240	380
3.05	3.0195	3.0805		
3.10	3.0690	3.1310		
3.15	3.1185	3.1815		
3.20	3.1680	3.2320		
3.25	3.2175	3.2825		
3.30	3.2670	3.3330		
3.35	3.3165	3.3835		
3.40	3.3660	3.4340		
3.45	3.4155	3.4845		
3.50	3.4650	3.5350		
3.55	3.5145	3.5855		
3.60	3.5640	3.6360		


TEST CIRCUITS

$C_{IN}=1.0\mu F$, $C_L=1.0\mu F$


Circuit ①

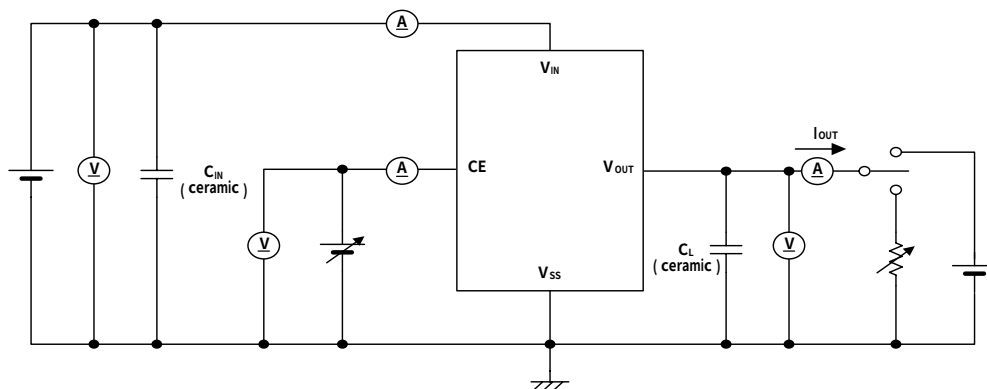


Circuit ②

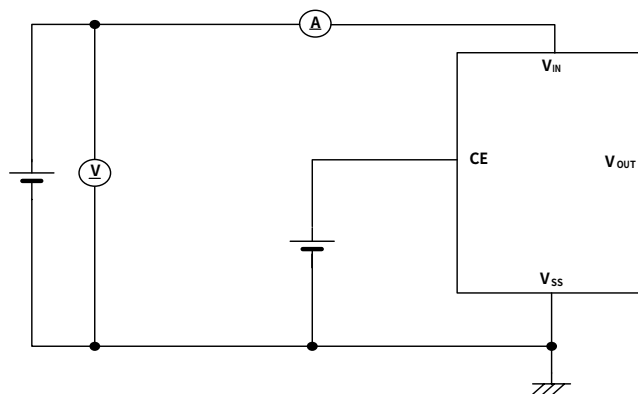

Circuit ③

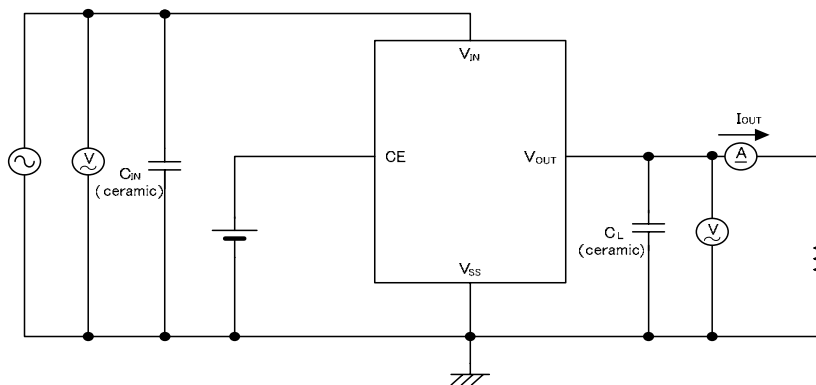

Circuit ④

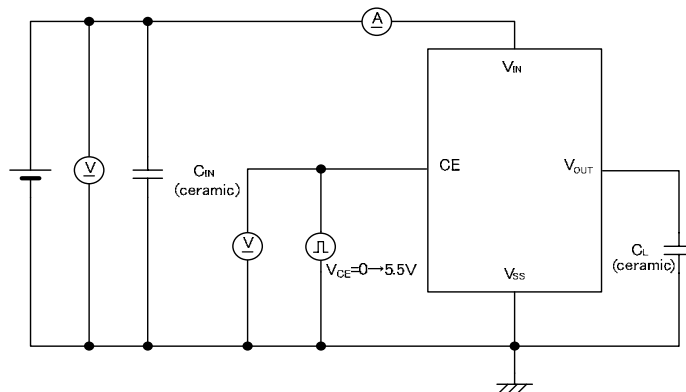

■ OPERATIONAL EXPLANATION (Continued)

<C_L High-speed Discharge Function>

The N-ch transistor located between the V_{OUT} pin and the V_{SS} pin and the C_L discharge resistance is set to 270Ω (TYP.) when V_{IN} is 5.5V (TYP.) and V_{OUT} is 2.0V (TYP.).

This N-ch transistor can quickly discharge the electric charge at the output capacitor (C_L), when a low signal is inputted to the CE pin. Moreover, discharge time of the output capacitor (C_L) is set by the C_L auto-discharge resistance (R_{DCHG}) and the output capacitance (C_L).

By setting time constant of a C_L auto-discharge resistance (R_{DCHG}) and an output capacitance (C_L) as τ ($\tau = C_L \times R_{DCHG}$), the output voltage after discharge via the N-ch transistor is calculated by the following formula.

$$V = V_{OUT(E)} \times e^{-t/\tau}$$

V: Output voltage after discharge

V_{OUT(E)}: Output voltage

t: Discharge time

τ : R_{DCHG} × C_L

C_L: Output capacitance

R_{DCHG}: C_L auto-discharge resistance

or discharge time is calculated by the next formula.

$$t = \tau \ln (V_{OUT(E)} / V)$$

< Inrush Current Prevention >

The inrush current prevention circuit is built in the XC6233 series.







When the IC starts to operate, the prevention circuit limits the inrush current as 95mA (TYP.) from input pin (V_{IN}) to output pin (V_{OUT}) for charging C_L capacitor. However, the device can not provide the output current beyond 95mA (TYP.) for a period of approximately 100 μs because internal control of the IC.

■NOTES ON USE

1. For temporary, transitional voltage drop or voltage rising phenomenon, the IC is liable to malfunction should the ratings be exceeded.
2. Where wiring impedance is high, operations may become unstable due to noise and/or phase lag depending on output current. Please strengthen V_{IN} and V_{SS} wiring in particular.
3. Please wire the input capacitor (C_{IN}) and the output capacitor (C_L) as close to the IC as possible.
4. Torex places an importance on improving our products and their reliability.
We request that users incorporate fail-safe designs and post-aging prevention treatment when using Torex products in their systems.



TYPICAL PERFORMANCE CHARACTERISTICS

(1) Output Voltage vs. Output Current

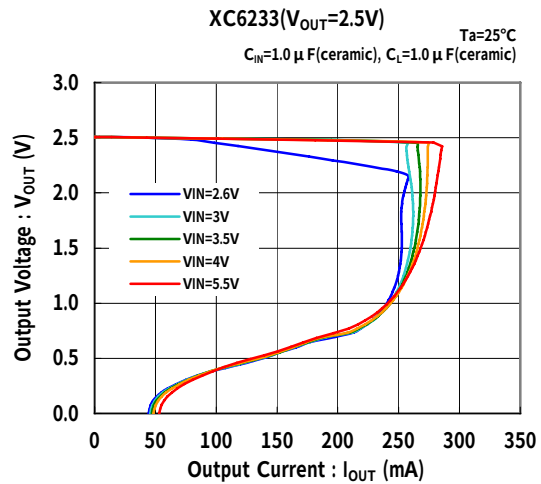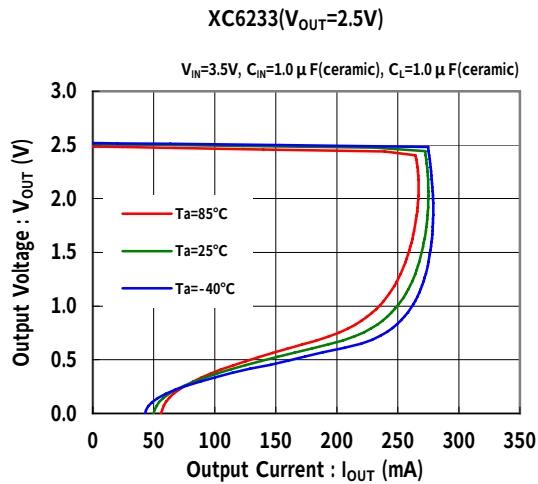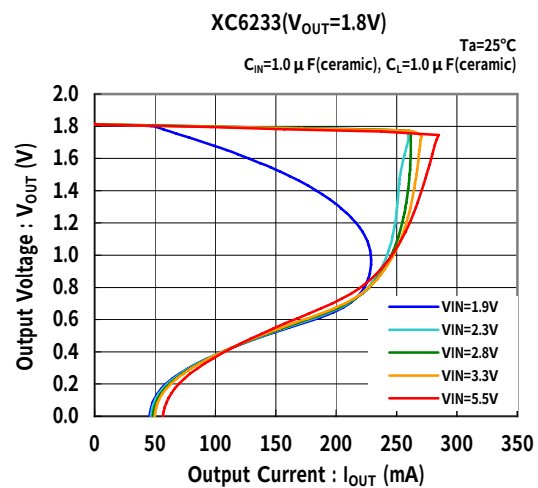
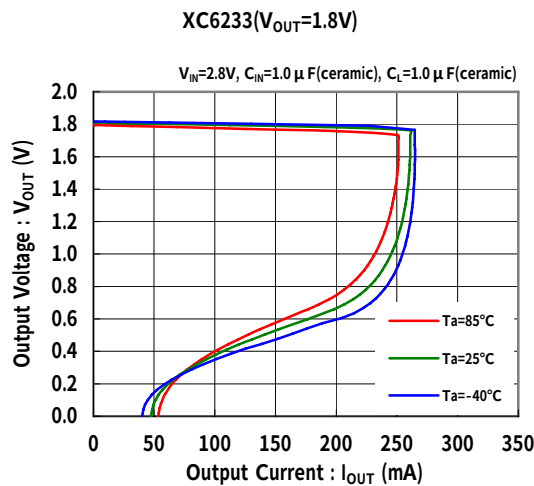
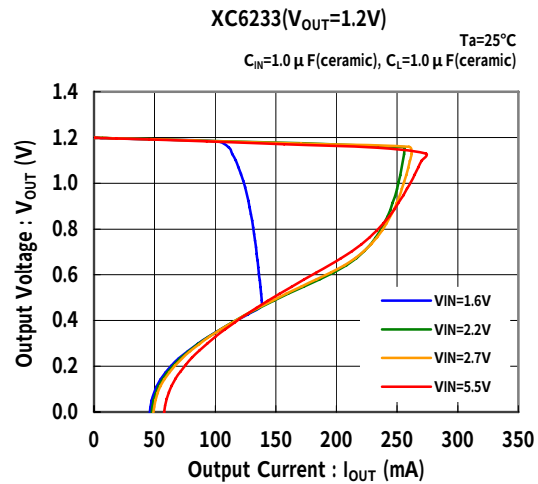
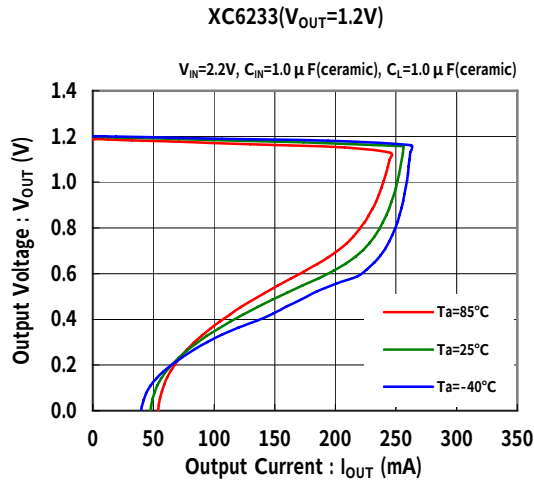


■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(1) Output Voltage vs. Output Current (Continued)



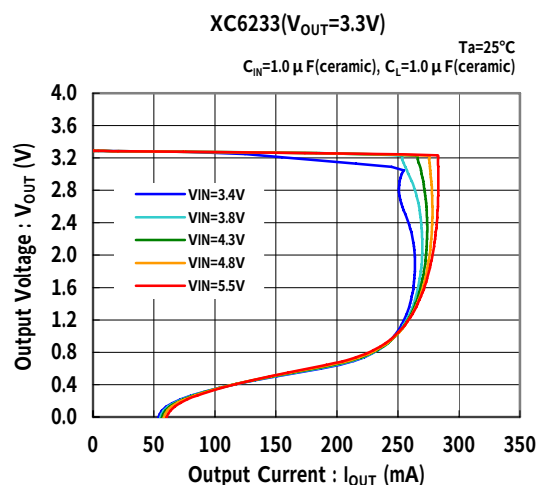
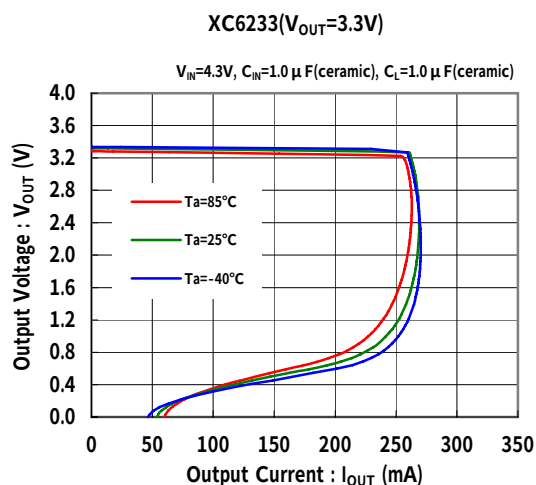


(2) Output Voltage vs. Input Voltage

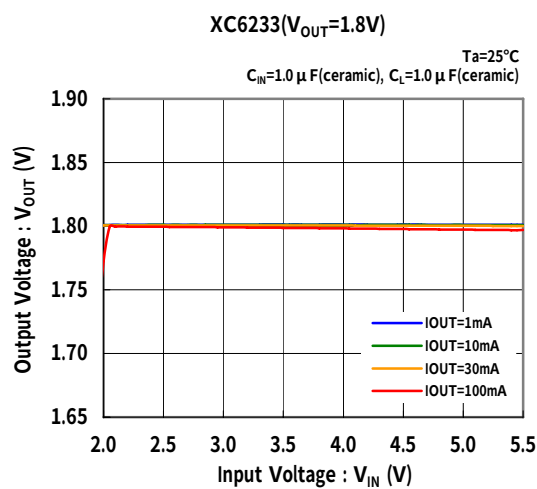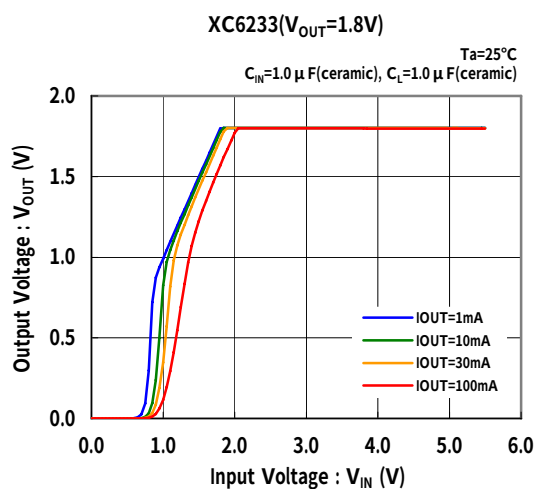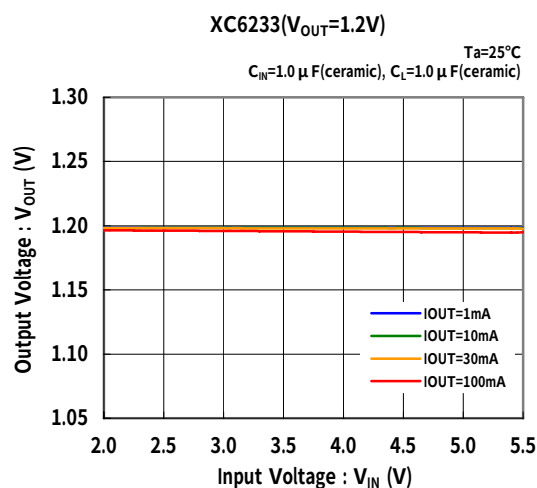
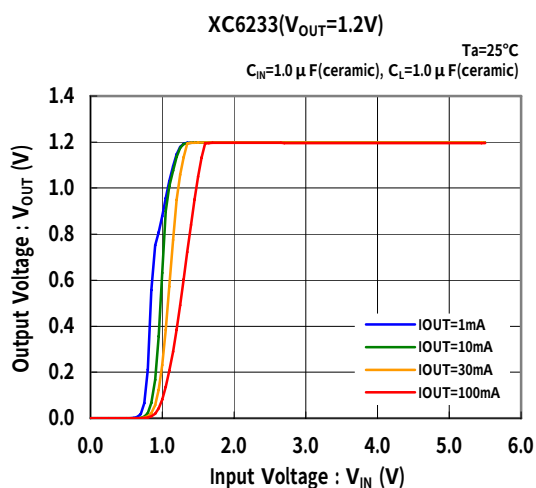


TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(2) Output Voltage vs. Input Voltage (Continued)

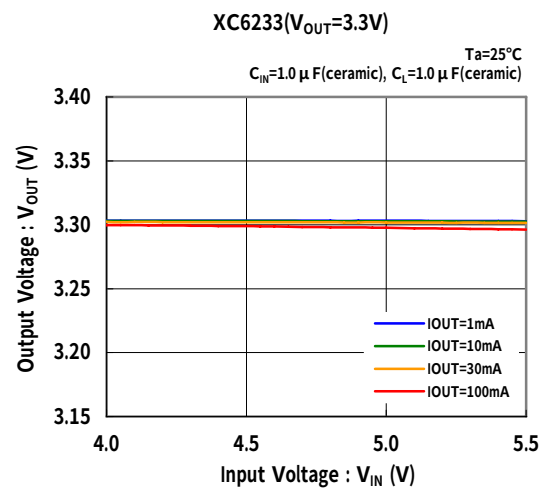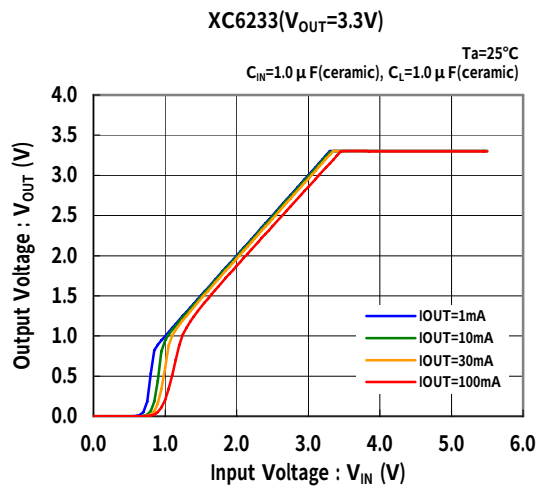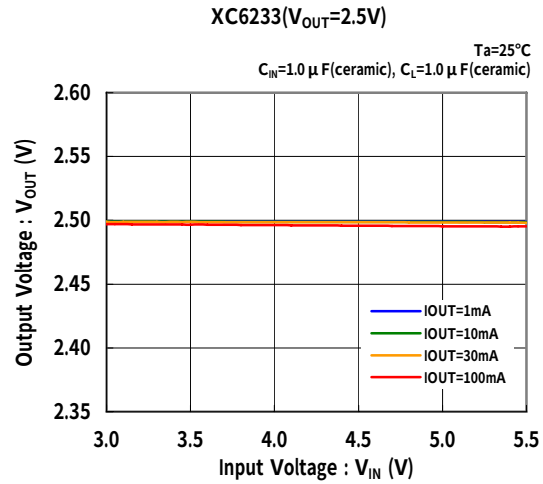
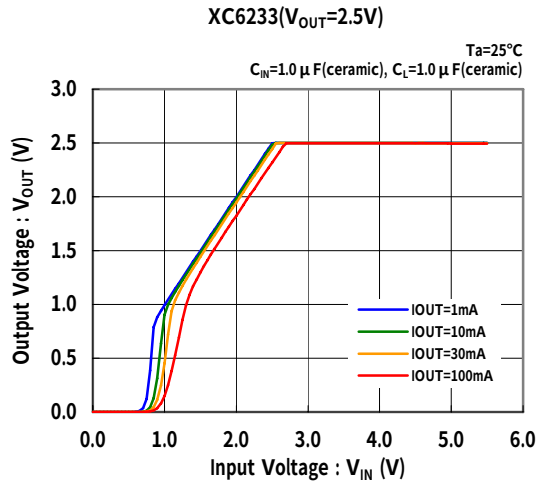


(3) Dropout Voltage vs. Output Current



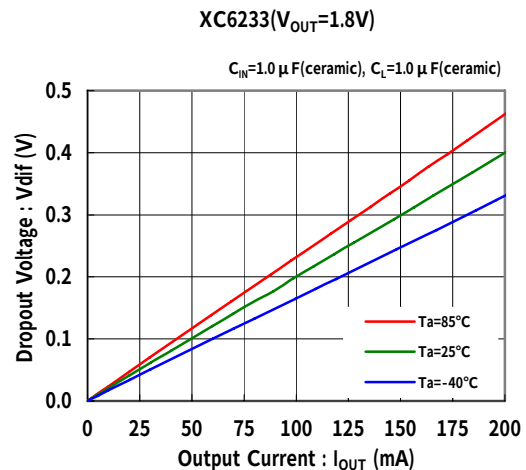
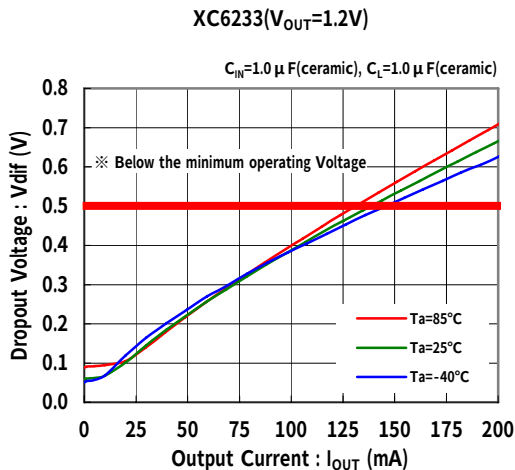


■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(3) Dropout Voltage vs. Output Current (Continued)



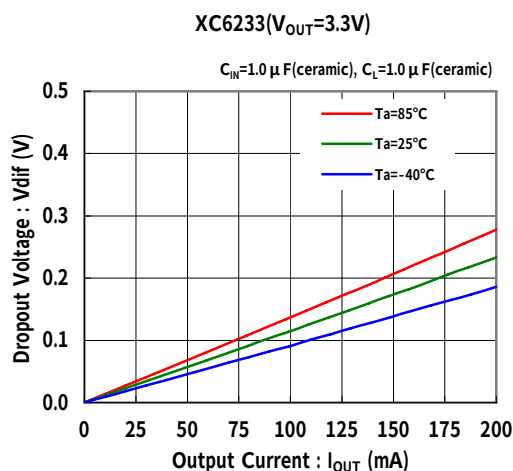
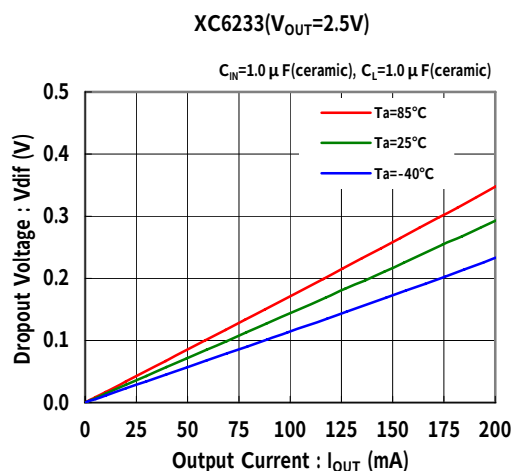


(4) Supply Current vs. Input Voltage

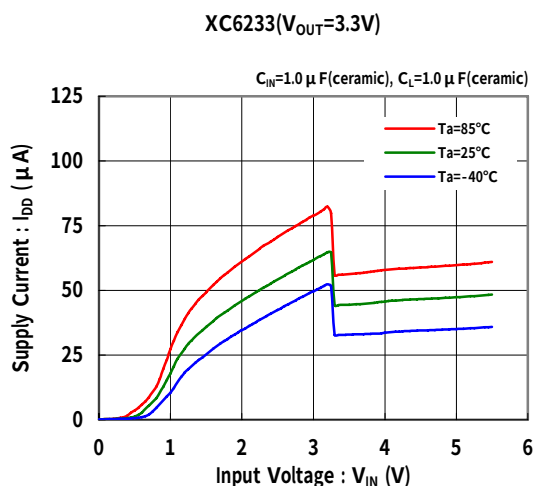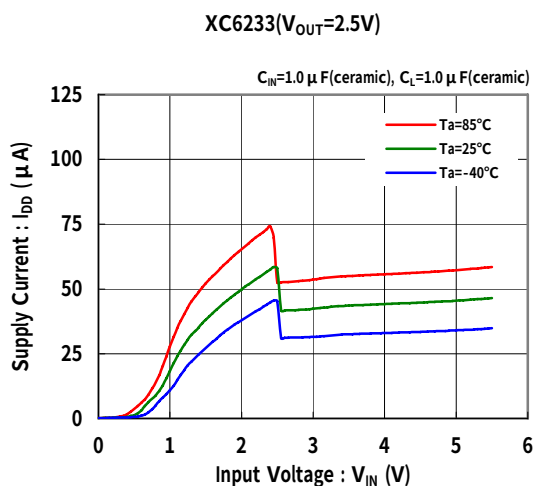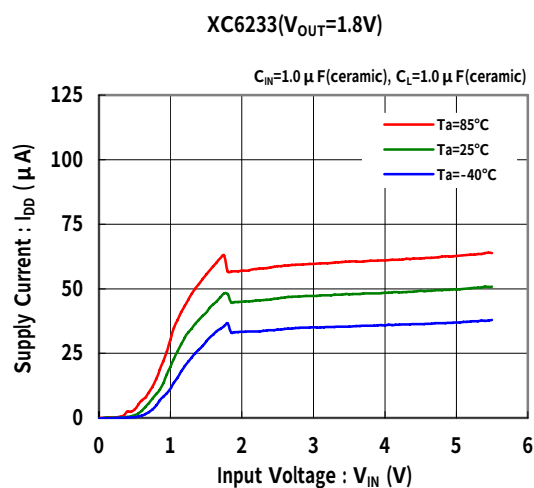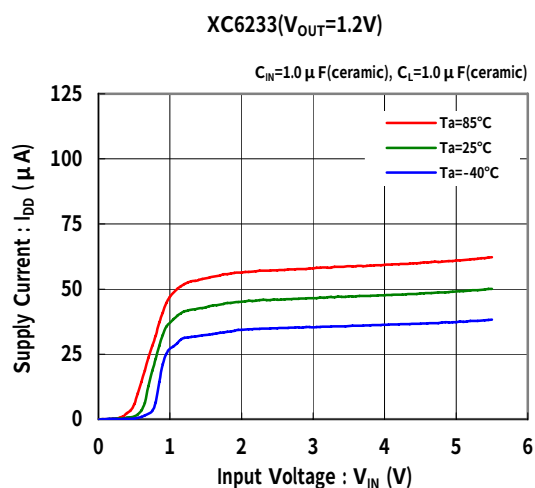


TYPICAL PERFORMANCE CHARACTERISTICS (Continued)


(5) Output Voltage vs. Ambient Temperature

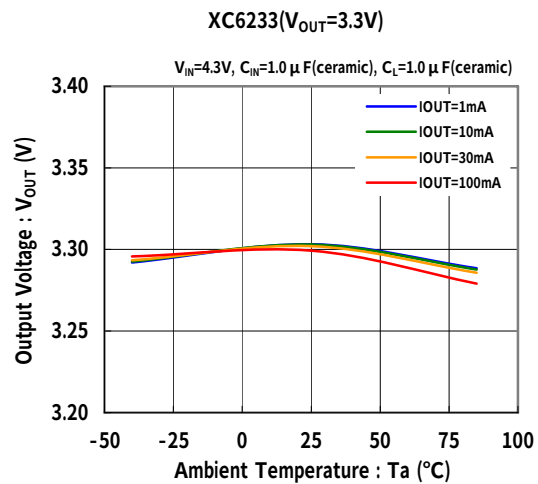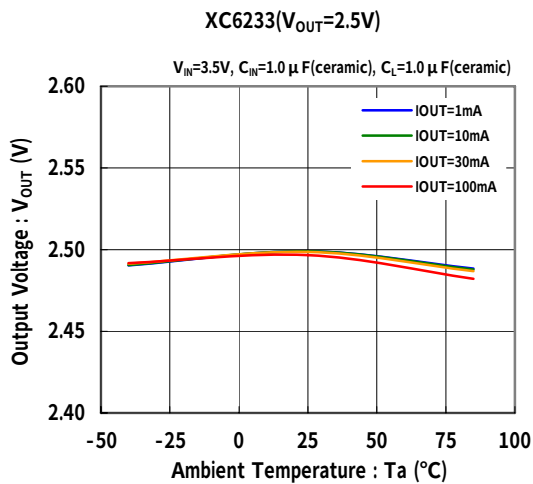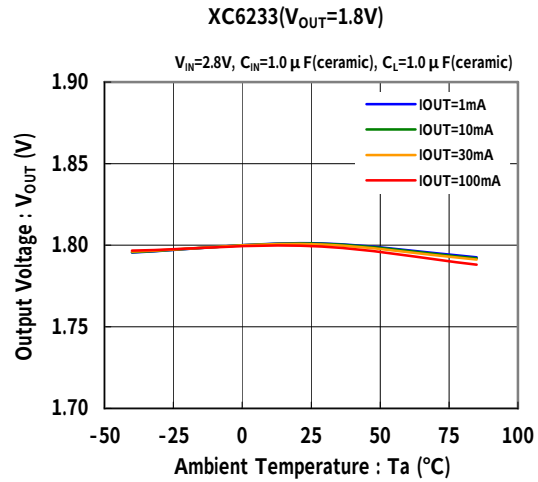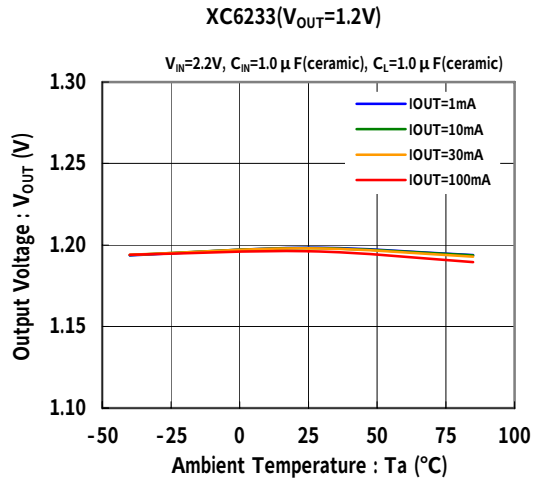

(6) Supply Current vs. Ambient Temperature




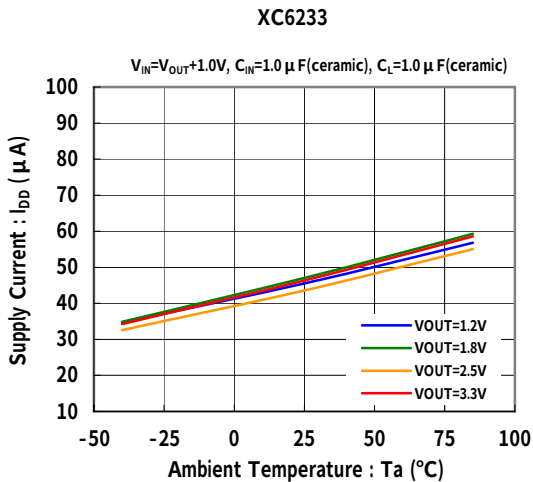


(7) CE Threshold Voltage vs. Ambient Temperature


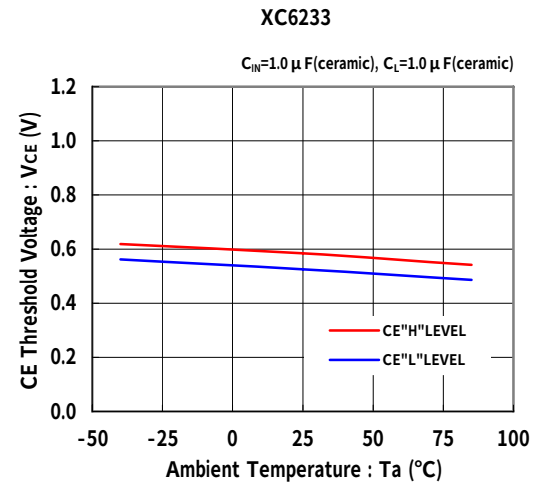


■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(8) Rising Response Time

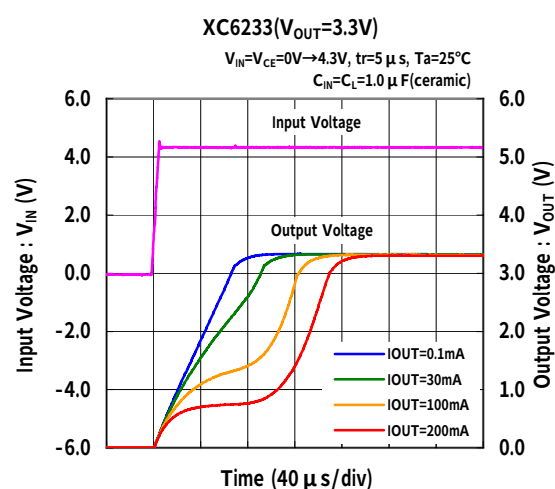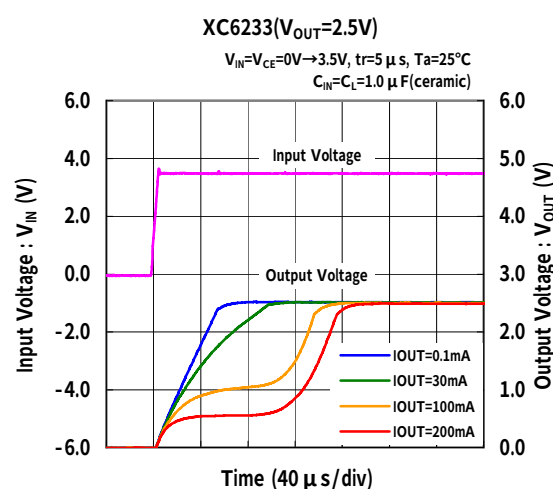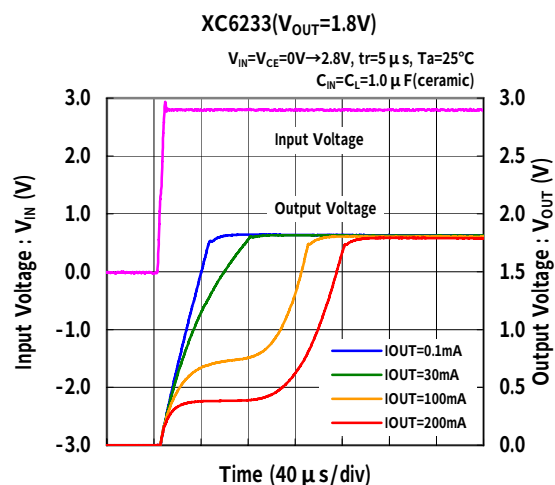
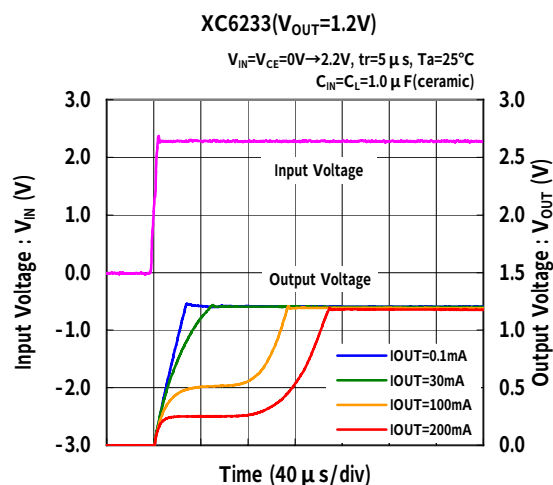


(9) Input Transient Response



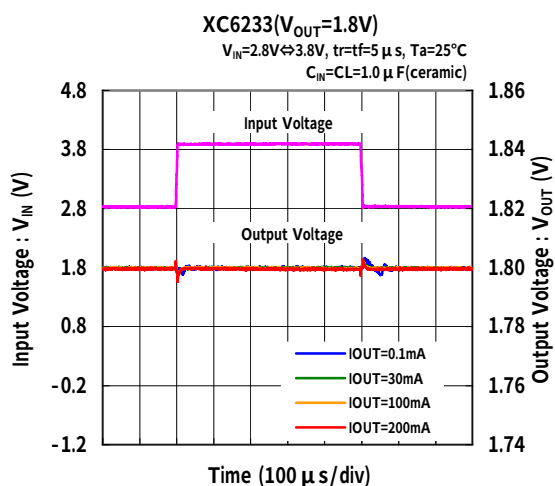
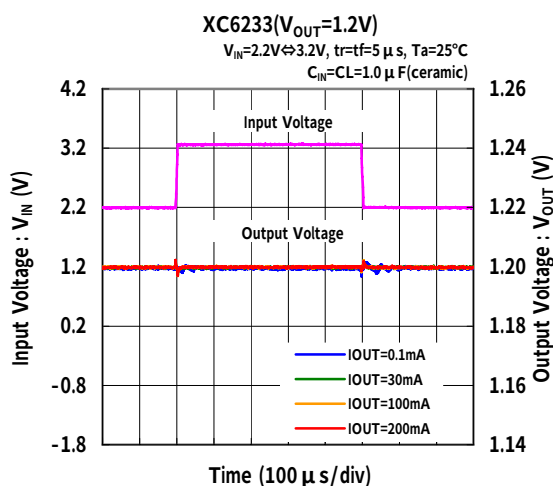


TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(9) Input Transient Response (Continued)



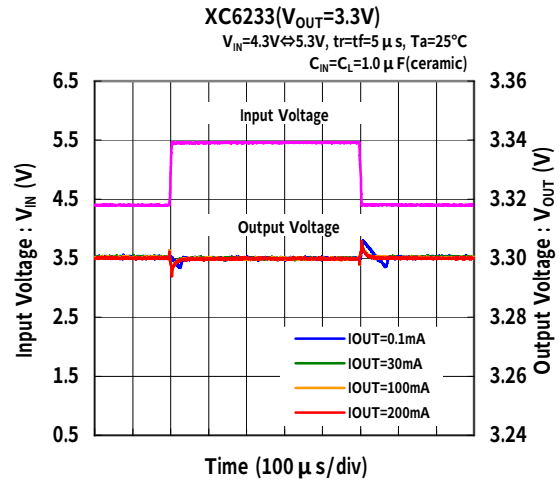
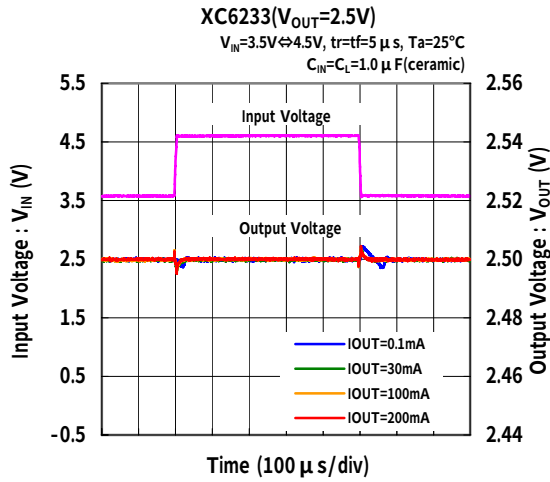


(10) Load Transient Response

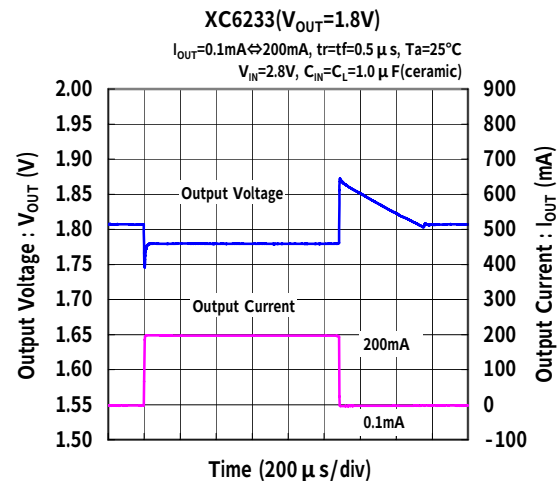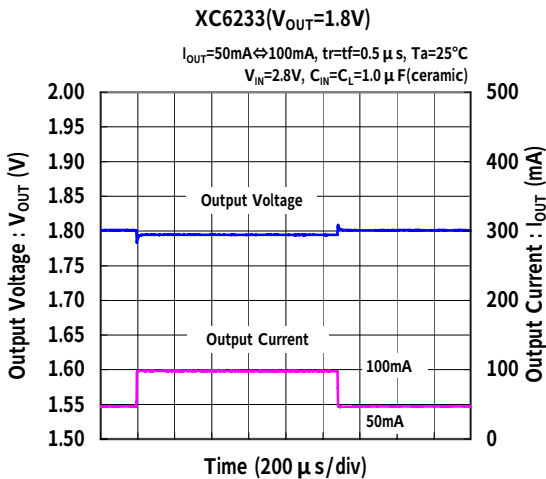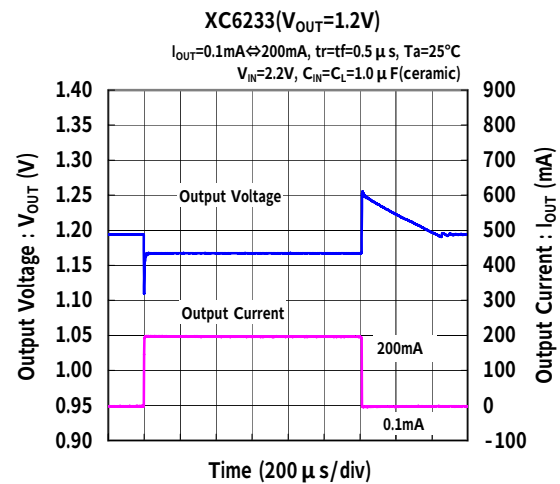
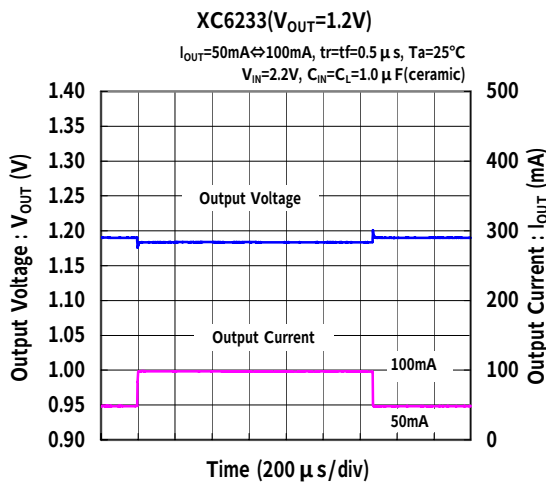


■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(10) Load Transient Response (Continued)

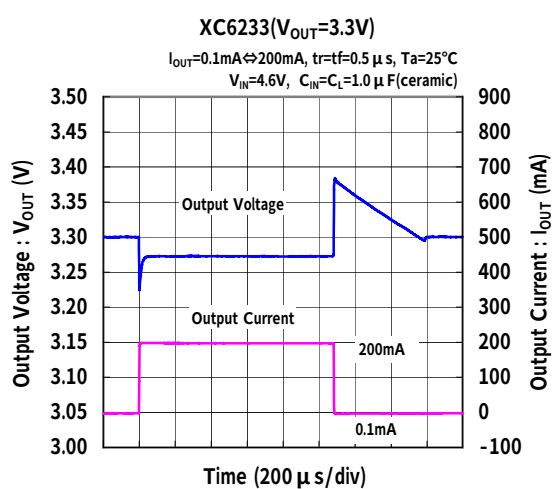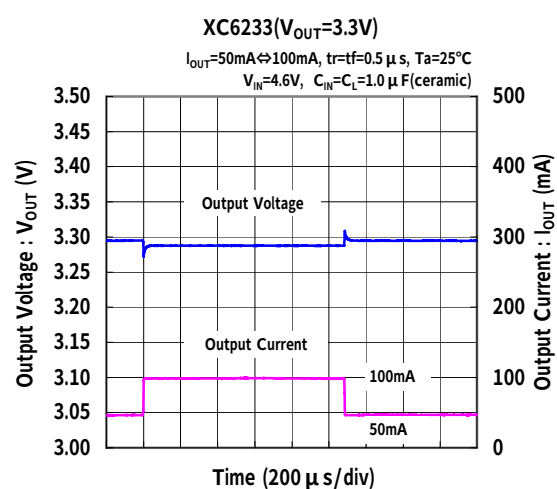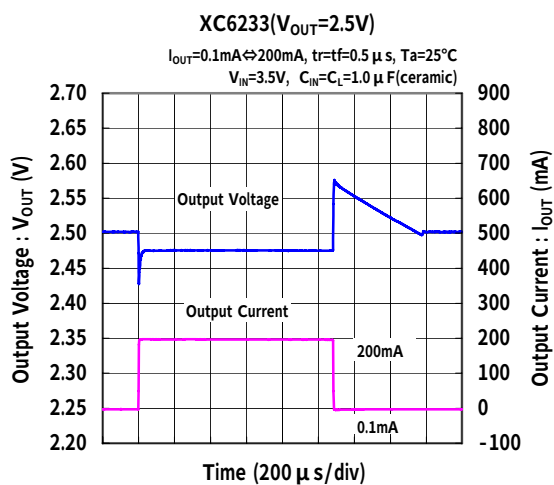
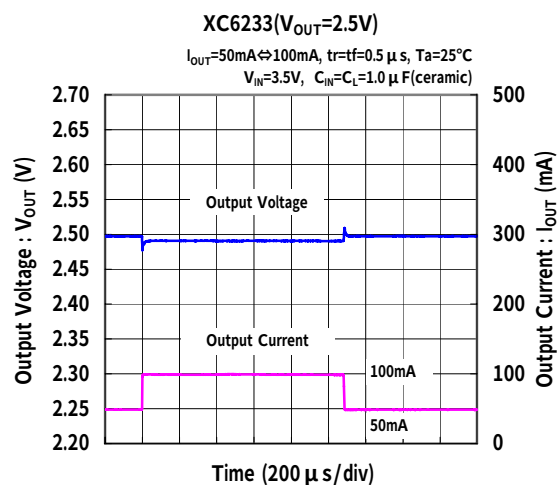


(11) CE Rising Response Time



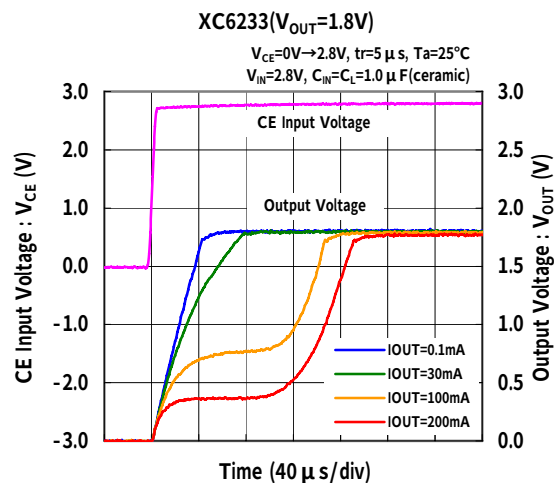
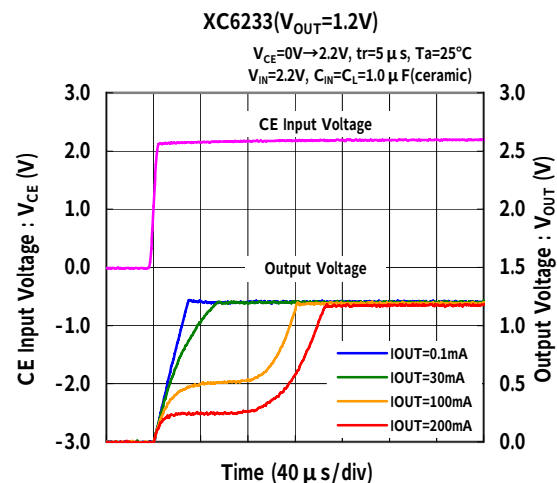


TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(11) CE Rising Response Time (Continued)



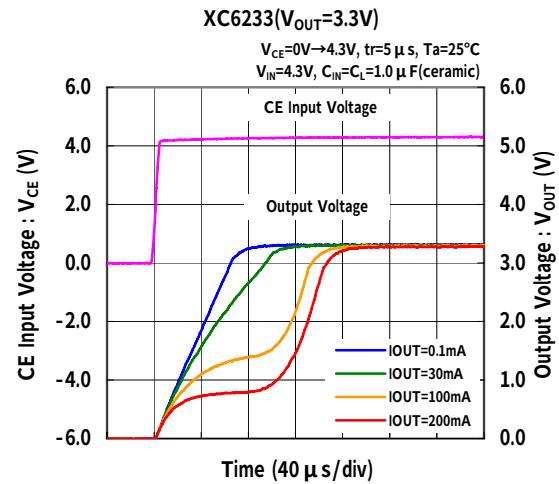
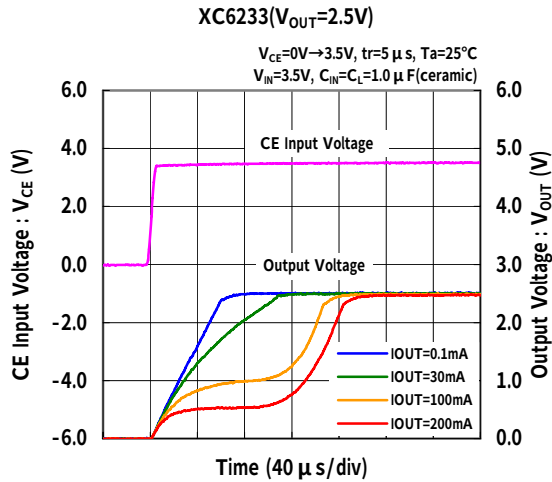


(12) Power Supply Rejection Ratio

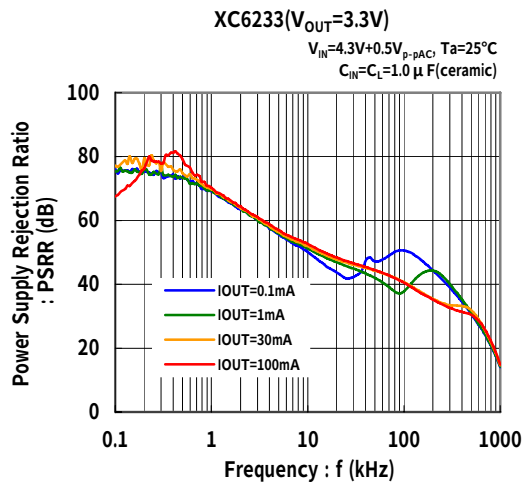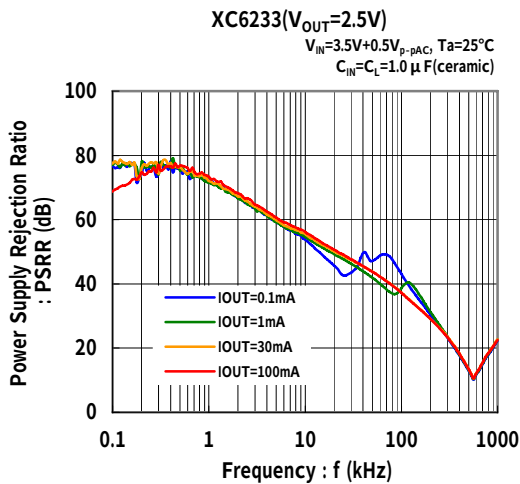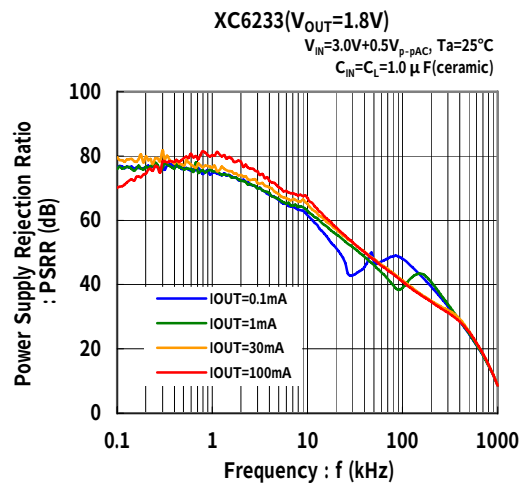
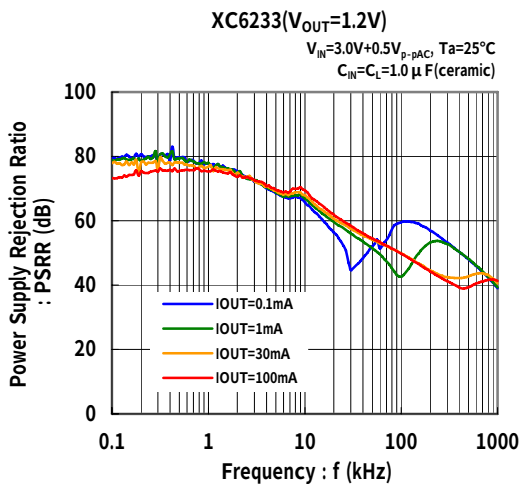


■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(13) Inrush Current Response

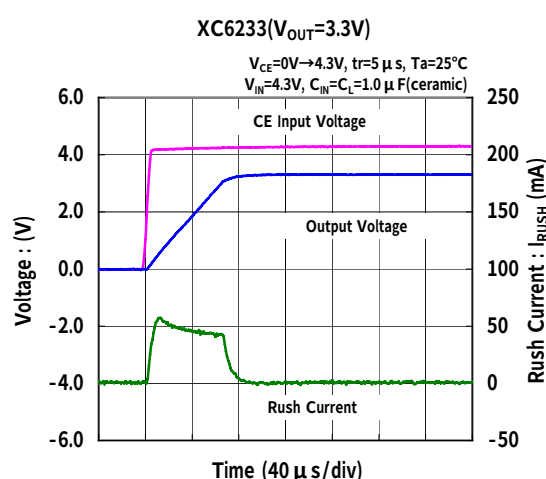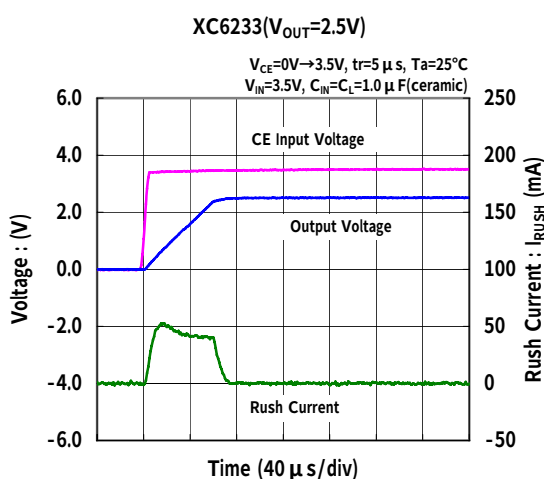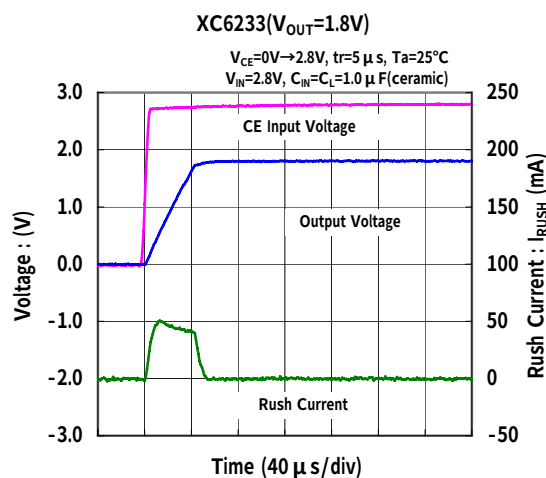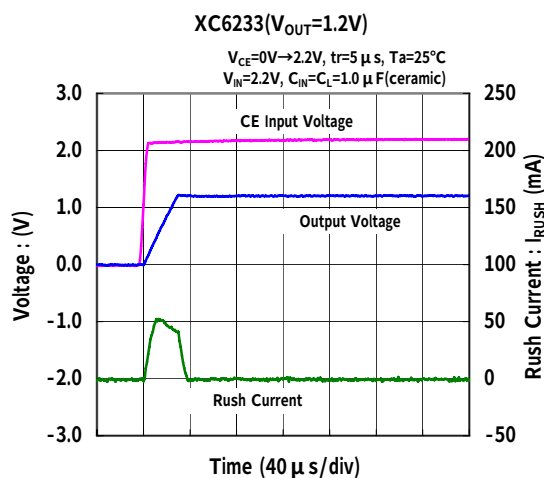


(14) Output Noise Density

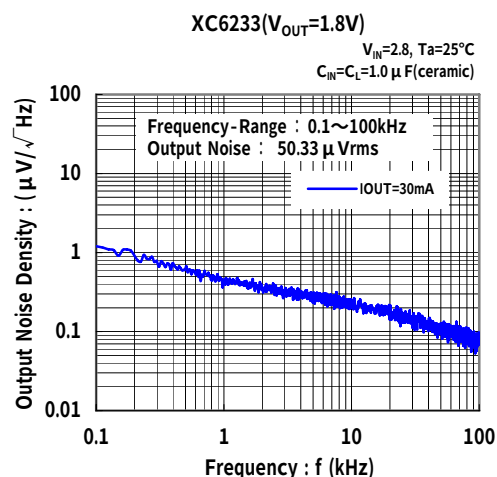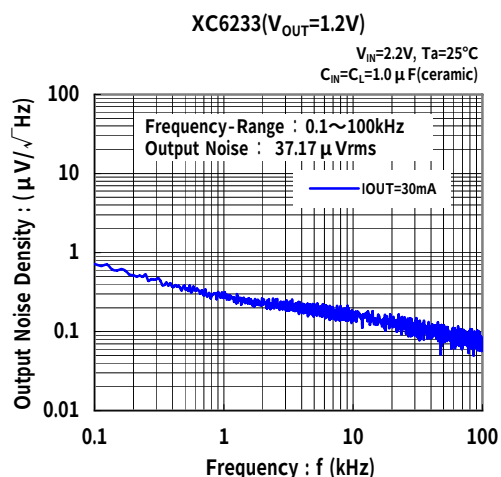


TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(14) Output Noise Density (Continued)

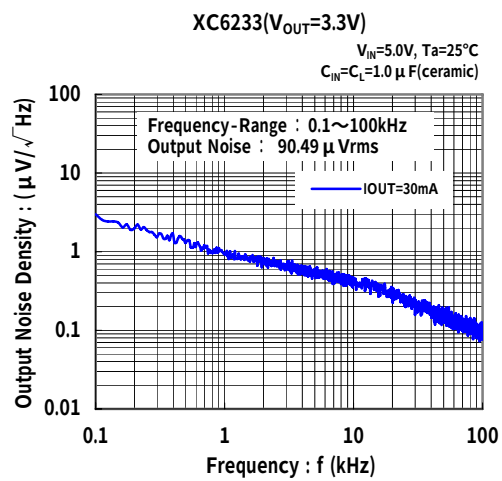


PACKAGING INFORMATION


●USPQ-4B04 (unit:mm)

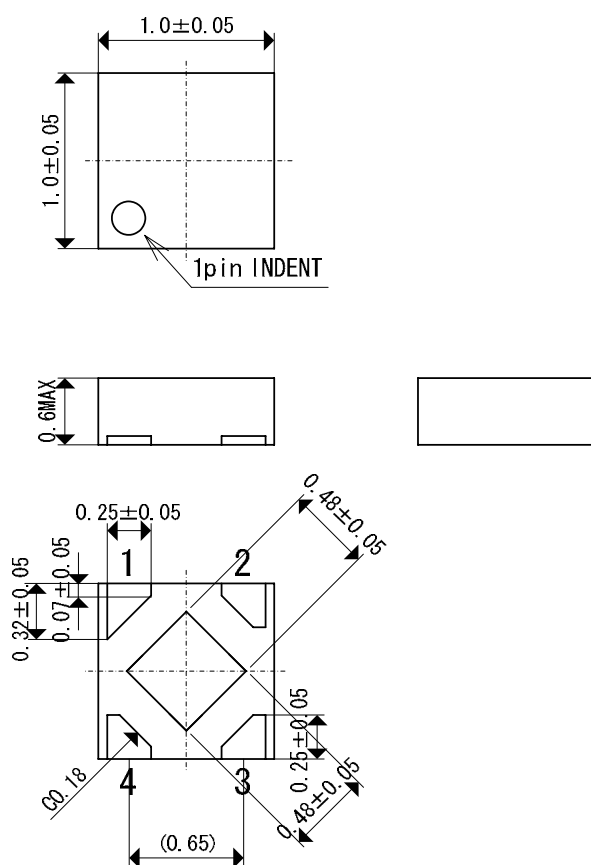

●USPQ-4B04 Reference Pattern Layout (unit: mm)

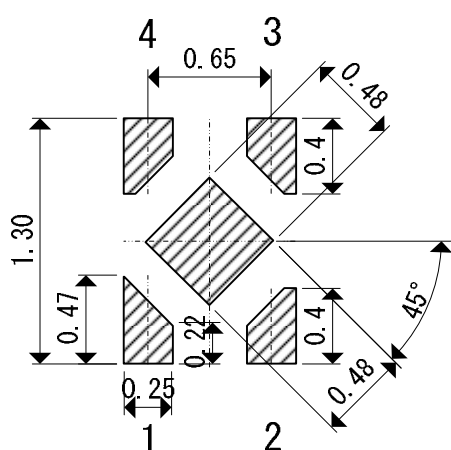


●USPQ-4B04 Reference Metal Mask Design (unit: mm)

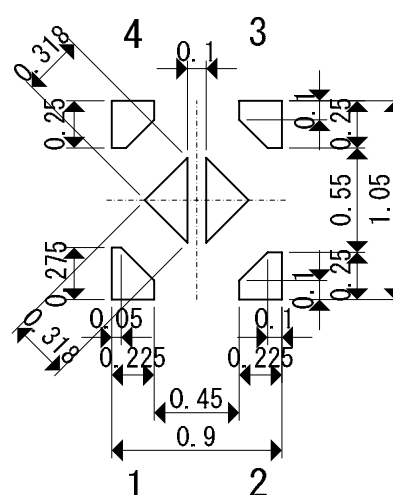


PACKAGING INFORMATION (Continued)


● USP-4 (unit: mm)

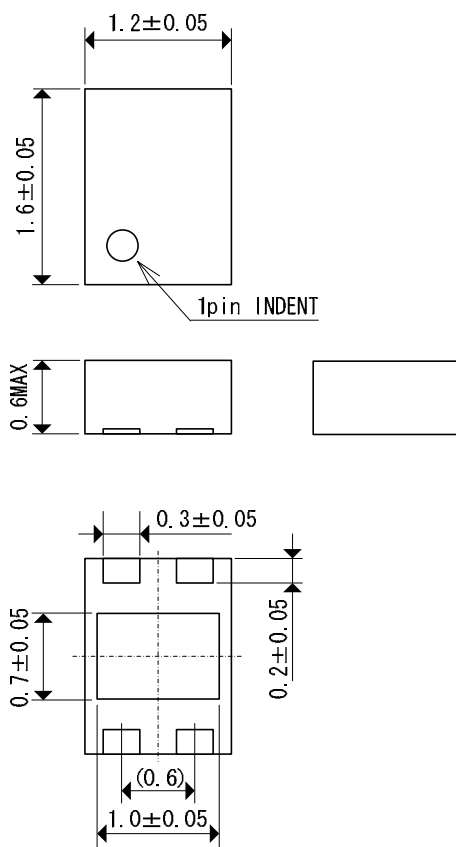

● USP-4 Reference Pattern Layout (unit: mm)

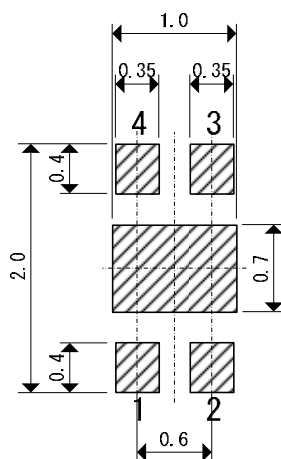


● USP-4 Reference Metal Mask Design (unit: mm)

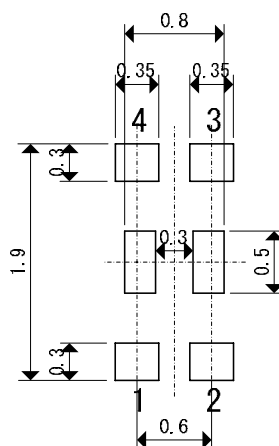


■ PACKAGING INFORMATION (Continued)

● SSOT-24 (unit: mm)

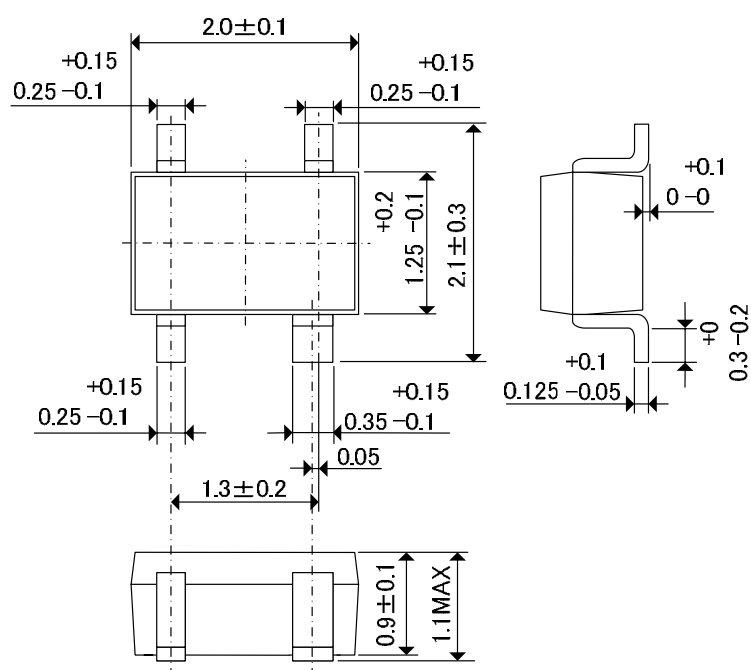

● SOT-25 (unit: mm)

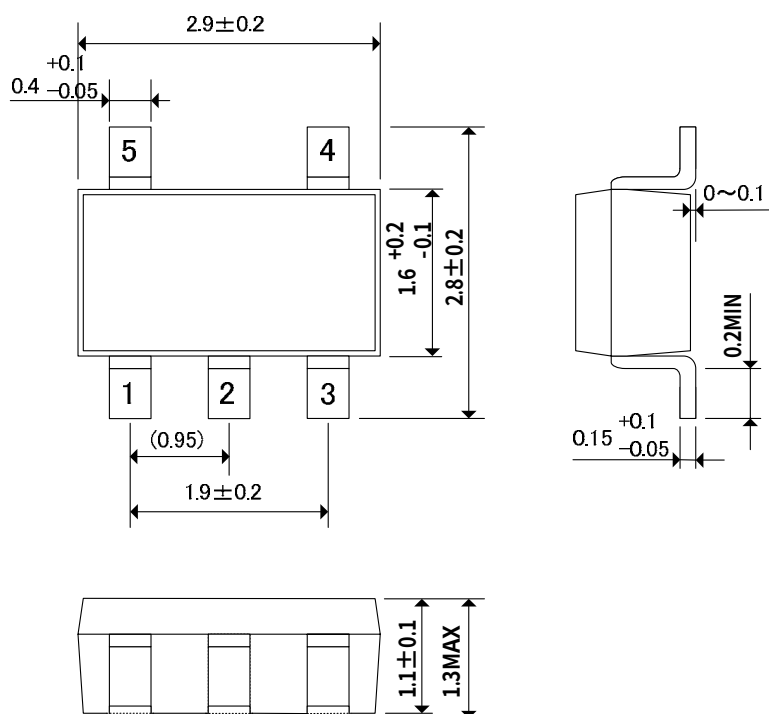

● USPQ-4B04 Power Dissipation


Power dissipation data for the USPQ-4B04 is shown in this page.

The value of power dissipation varies with the mount board conditions.

Please use this data as the reference data taken in the following condition.

1. Measurement Condition

Condition	: Mount on a board
Ambient	: Natural convection
Soldering	: Lead (Pb) free
Board Dimensions	: 40 x 40 mm (1600mm ²)
Board Structure	: 4 Copper Layers
	Each layer is connected to the package heat-sink and terminal pin No.1.
	Each layer has approximately 800mm ² copper area.
Material	: Glass Epoxy (FR-4)
Thickness	: 1.6 mm
Through-hole	: 4 x 0.8 Diameter

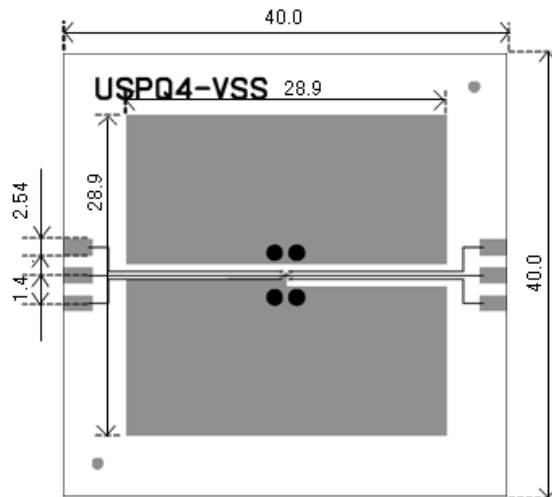


Evaluation Board (Unit: mm)

2. Power Dissipation vs. Ambient Temperature

Board Mount (T_j max = 125°C)

Ambient Temperature (°C)	Power Dissipation Pd (mW)	Thermal Resistance (°C/W)
25	550	181.82
85	220	

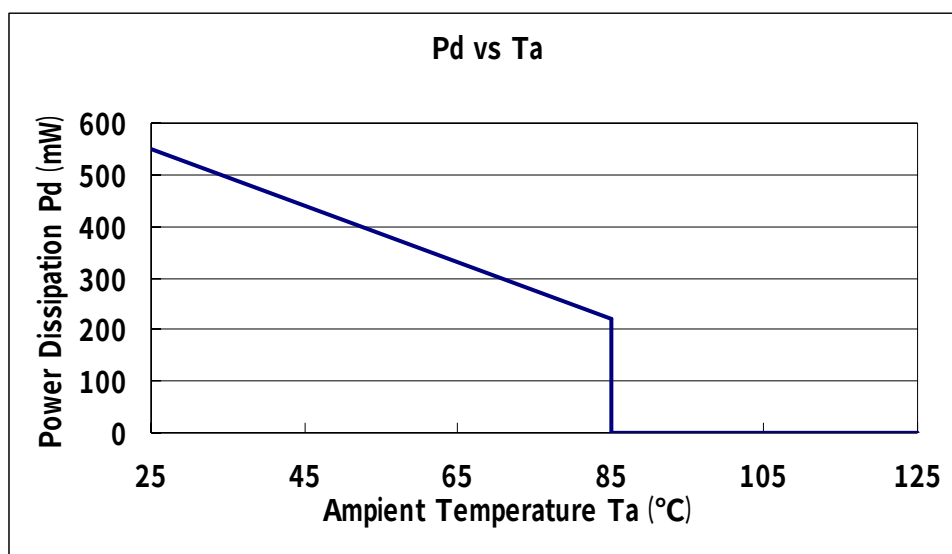

● USP-4 Power Dissipation


Power dissipation data for the USP-4 is shown in this page.

The value of power dissipation varies with the mount board conditions.

Please use this data as the reference data taken in the following condition.

1. Measurement Condition

Condition:	Mount on a board
Ambient:	Natural convection
Soldering:	Lead (Pb) free
Board:	Dimensions 40 x 40 mm (1600mm ² in one side) Copper (Cu) traces occupy 50% of the board area In top and back faces Package heat-sink is tied to the copper traces
Material:	Glass Epoxy (FR-4)
Thickness:	1.6 mm
Through-hole:	4 x 0.8 Diameter

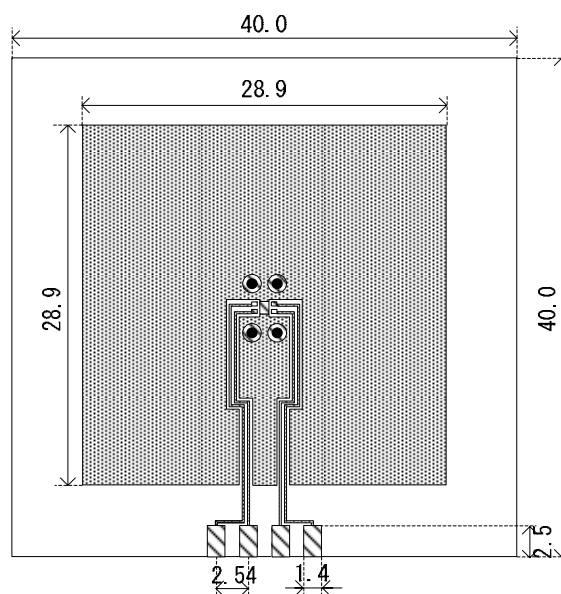


Evaluation Board (Unit: mm)

2. Power Dissipation vs. Ambient Temperature

Board Mount (T_{jmax}=125°C)

Ambient Temperature (°C)	Power Dissipation Pd (mW)	Thermal Resistance (°C/W)
25	1000	100.00
85	400	

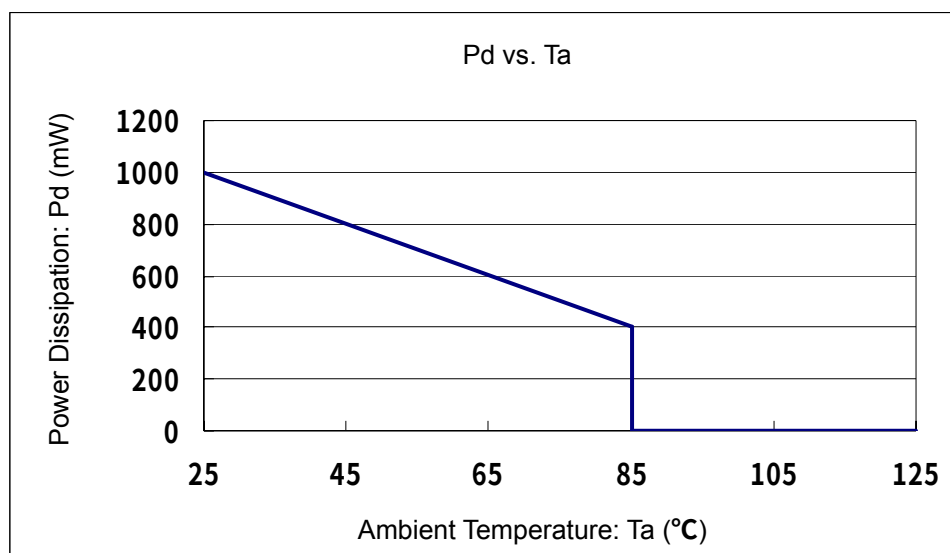

● SSOT-24 Power Dissipation


Power dissipation data for the SSOT-24 is shown in this page.

The value of power dissipation varies with the mount board conditions.

Please use this data as the reference data taken in the following condition.

1. Measurement Condition

Condition:	Mount on a board
Ambient:	Natural convection
Soldering:	Lead (Pb) free
Board:	Dimensions 40 × 40mm (1600mm ² in one side) Copper (Cu) traces occupy 50% of the board area In top and back faces Package heat-sink is tied to the copper traces
Material:	Glass Epoxy (FR-4)
Thickness:	1.6mm
Through-hole:	4 x 0.8 Diameter

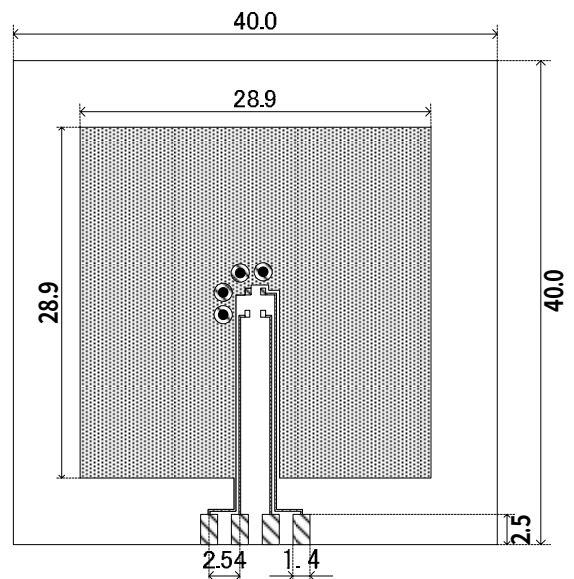


Evaluation Board (Unit: mm)

2. Power Dissipation vs. Ambient Temperature

Board Mount (T_{jmax}=125°C)

Ambient Temperature (°C)	Power Dissipation Pd (mW)	Thermal Resistance (°C/W)
25	500	200.00
85	200	

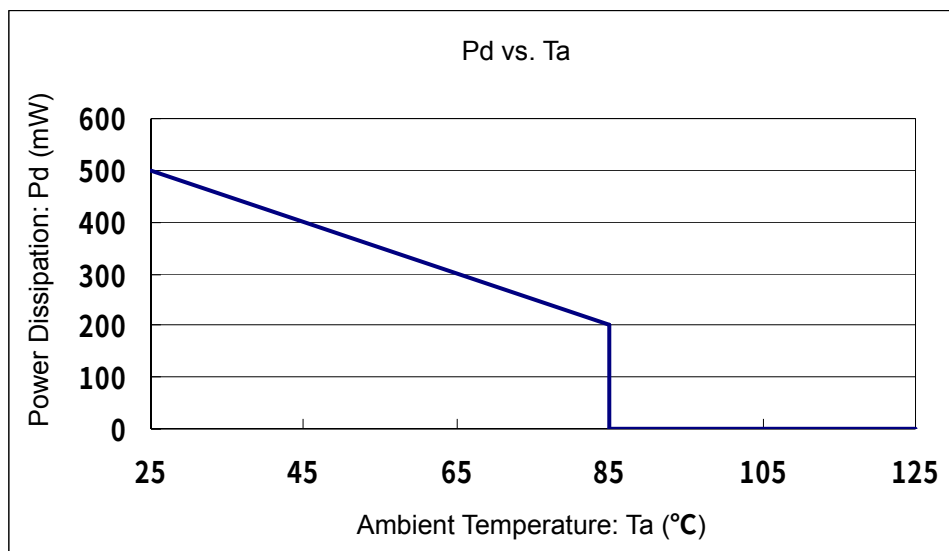

● SOT-25 Power Dissipation


Power dissipation data for the SOT-25 is shown in this page.

The value of power dissipation varies with the mount board conditions.

Please use this data as the reference data taken in the following condition.

1. Measurement Condition

Condition:	Mount on a board
Ambient:	Natural convection
Soldering:	Lead (Pb) free
e	
Board:	Dimensions 40×40mm (1600mm ² in one side) Copper (Cu) traces occupy 50% of the board area In top and back faces Package heat-sink is tied to the copper traces (Board of SOT-26 is used)
Material:	Glass Epoxy (FR-4)
Thickness:	1.6mm
Through-hole:	4 x 0.8 Diameter

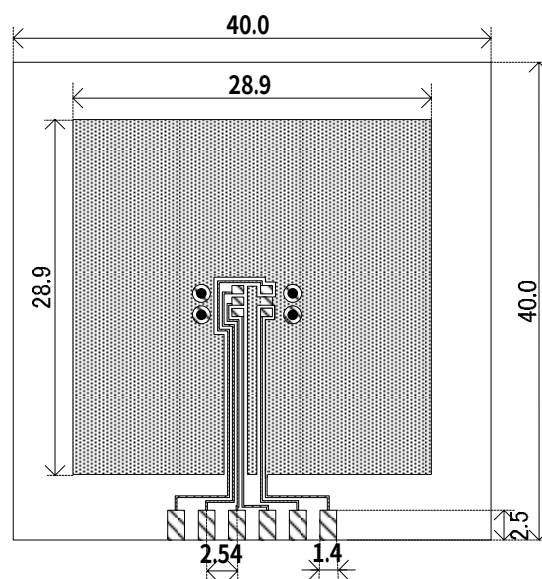


Evaluation Board (Unit: mm)

2. Power Dissipation vs. Ambient Temperature


Board Mount (T_{jmax}=125°C)

Ambient Temperature (°C)	Power Dissipation Pd (mW)	Thermal Resistance (°C/W)
25	600	166.67
85	240	

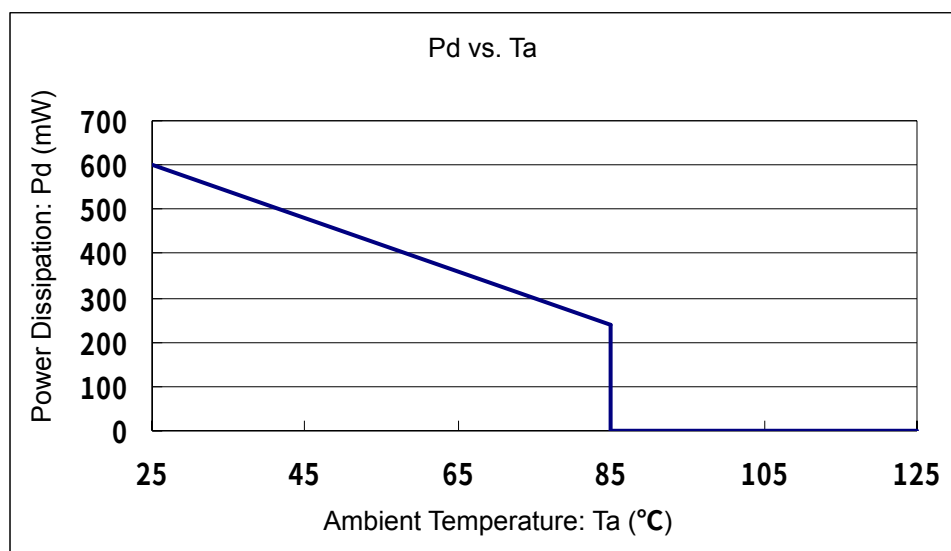


MARKING RULE


SOT-25 (Under-dot)



USP-4



Magnified



* SOT-25 with the under-dot marking is used.

① represents products series

MARK	PRODUCT SERIES
1	XC6233*****-G

② represents type of regulator

MARK		PRODUCT SERIES
OUTPUT VOLTAGE 0.1V Increments	OUTPUT VOLTAGE 0.05V Increments	
K	M	XC6233H*****-G

③ represents output voltage

MARK	OUTPUT VOLTAGE (V)		MARK	OUTPUT VOLTAGE (V)	
0	1.2	1.25	F	2.7	2.75
1	1.3	1.35	H	2.8	2.85
2	1.4	1.45	K	2.9	2.95
3	1.5	1.55	L	3.0	3.05
4	1.6	1.65	M	3.1	3.15
5	1.7	1.75	N	3.2	3.25
6	1.8	1.85	P	3.3	3.35
7	1.9	1.95	R	3.4	3.45
8	2.0	2.05	S	3.5	3.55
9	2.1	2.15	T	3.6	-
A	2.2	2.25	U	-	-
B	2.3	2.35	V	-	-
C	2.4	2.45	X	-	-
D	2.5	2.55	Y	-	-
E	2.6	2.65	Z	-	-

④,⑤ represents production lot number


01~09, 0A~0Z, 11~9Z, A1~A9, AA~AZ, B1~ZZ in order.

(G, I, J, O, Q, W excluded)


*No character inversion used.

■ MARKING RULE (Continued)

SSOT-24 (With the orientation bar at the top)



USPQ-4B04



(XC6233****-G with the orientation bar at the top is used.)

① represents products series, type of regulator and output voltage

MARK	OUTPUT VOLTAGE (V)	CURRENT LIMITER	CE PULL-DOWN RESISTOR	C _L AUTO DISCHARGE	INRUSH CURRENT PREVENTION	PRODUCT SERIES
A	1.2~2.0	Yes	Yes	Yes	Yes	XC6233H121**-G~XC6233H201**-G
B	2.1~2.9	Yes	Yes	Yes	Yes	XC6233H211**-G~XC6233H291**-G
C	3.0~3.6	Yes	Yes	Yes	Yes	XC6233H301**-G~XC6233H361**-G
D	1.25~2.05	Yes	Yes	Yes	Yes	XC6233H12B**-G~XC6233H20B**-G
E	2.15~2.95	Yes	Yes	Yes	Yes	XC6233H21B**-G~XC6233H29B**-G
F	3.05~3.55	Yes	Yes	Yes	Yes	XC6233H30B**-G~XC6233H35B**-G

② represents output voltage

MARK	OUTPUT VOLTAGE (V)					
1	1.2	2.1	3.0	1.25	2.15	3.05
2	1.3	2.2	3.1	1.35	2.25	3.15
3	1.4	2.3	3.2	1.45	2.35	3.25
4	1.5	2.4	3.3	1.55	2.45	3.35
5	1.6	2.5	3.4	1.65	2.55	3.45
6	1.7	2.6	3.5	1.75	2.65	3.55
7	1.8	2.7	3.6	1.85	2.75	
8	1.9	2.8		1.95	2.85	
9	2.0	2.9		2.05	2.95	

③,④ represents production lot number

01~09, 0A~0Z, 11~9Z, A1~A9, AA~AZ, B1~ZZ in order.

(G, I, J, O, Q, W excluded)

*No character inversion used.

1. The products and product specifications contained herein are subject to change without notice to improve performance characteristics. Consult us, or our representatives before use, to confirm that the information in this datasheet is up to date.
2. We assume no responsibility for any infringement of patents, patent rights, or other rights arising from the use of any information and circuitry in this datasheet.
3. Please ensure suitable shipping controls (including fail-safe designs and aging protection) are in force for equipment employing products listed in this datasheet.
4. The products in this datasheet are not developed, designed, or approved for use with such equipment whose failure of malfunction can be reasonably expected to directly endanger the life of, or cause significant injury to, the user.
(e.g. Atomic energy; aerospace; transport; combustion and associated safety equipment thereof.)
5. Please use the products listed in this datasheet within the specified ranges.
Should you wish to use the products under conditions exceeding the specifications, please consult us or our representatives.
6. We assume no responsibility for damage or loss due to abnormal use.
7. All rights reserved. No part of this datasheet may be copied or reproduced without the prior permission of TOREX SEMICONDUCTOR LTD.

TOREX SEMICONDUCTOR LTD.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Torex Semiconductor:

[XC6233H151MR-G](#) [XC6233H2819R-G](#) [XC6233H281MR-G](#) [XC6233H28B9R-G](#) [XC6233H2019R-G](#)
[XC6233H12BNR-G](#) [XC6233H331GR-G](#) [XC6233H251MR-G](#) [XC6233H361MR-G](#) [XC6233H1919R-G](#) [XC6233H3019R-G](#)
[XC6233H281GR-G](#) [XC6233H301NR-G](#) [XC6233H301GR-G](#) [XC6233H331MR-G](#) [XC6233H221GR-G](#)
[XC6233H251NR-G](#) [XC6233H29BNR-G](#) [XC6233H221MR-G](#) [XC6233H221NR-G](#) [XC6233H12B9R-G](#)
[XC6233H121GR-G](#) [XC6233F331MR-G](#) [XC6233H191NR-G](#) [XC6233H361GR-G](#) [XC6233H201MR-G](#)
[XC6233H341GR-G](#) [XC6233H351MR-G](#) [XC6233H13BNR-G](#) [XC6233H1519R-G](#) [XC6233H2519R-G](#) [XC6233H321MR-G](#)
[XC6233H271NR-G](#) [XC6233H181GR-G](#) [XC6233H181MR-G](#) [XC6233H271MR-G](#) [XC6233H28BNR-G](#)
[XC6233H311NR-G](#) [XC6233H351GR-G](#) [XC6233H331NR-G](#) [XC6233H1819R-G](#) [XC6233H281NR-G](#) [XC6233H121NR-G](#)
[XC6233H1219R-G](#) [XC6233H151NR-G](#) [XC6233H321NR-G](#) [XC6233H151GR-G](#) [XC6233H121MR-G](#)
[XC6233H181NR-G](#) [XC6233H3319R-G](#) [XC6233H291NR-G](#) [XC6233H271GR-G](#) [XC6233H251GR-G](#) [XC6233H291GR-G](#)
[XC6233H361NR-G](#) [XC6233H301MR-G](#) [XC6233H3219R-G](#)