


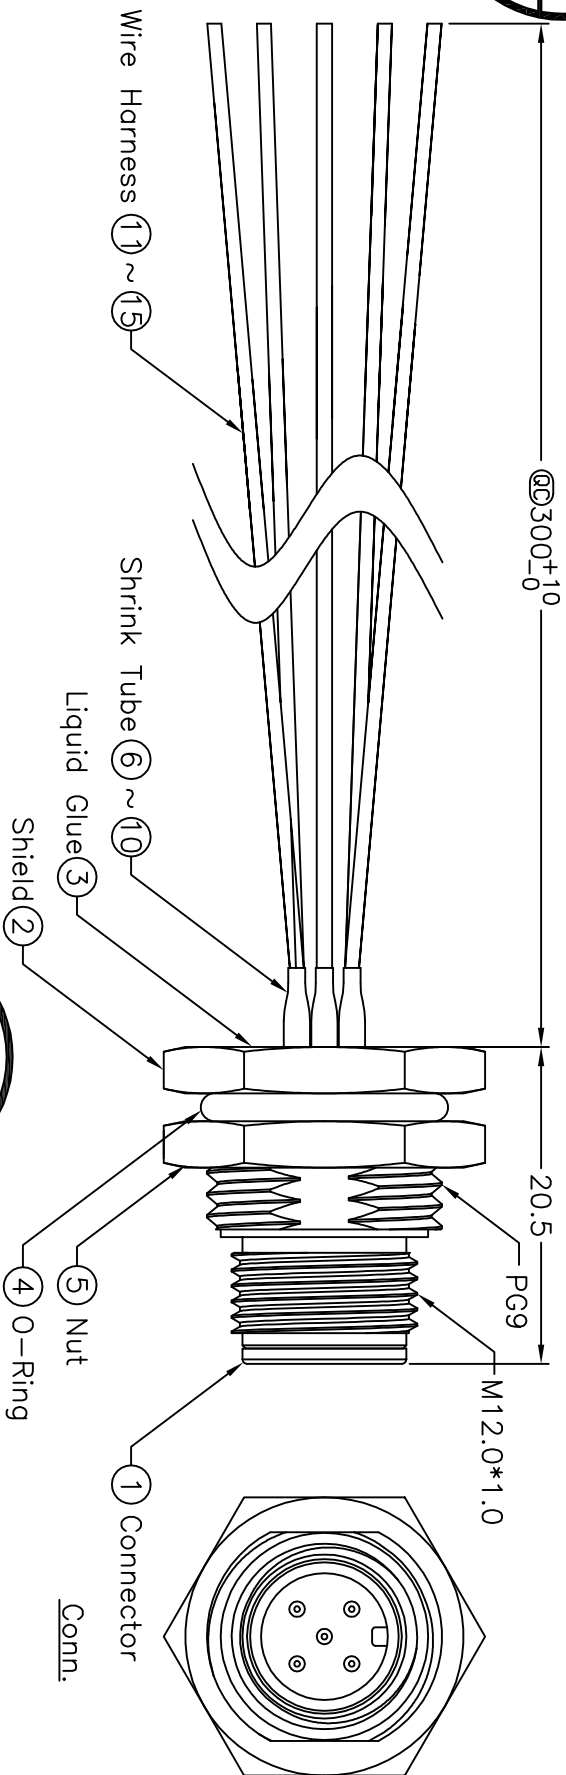


REV.	ECN NO.	DATE	SGN	DESCRIPTION
B	LEN-7A0185	2007/09/29	Myrdal	Added Note



- Note:
- * @D Important Dimension.
 - * Waterproof Rate: IP68
 - * Connector: Black, Nylon+GF
 - * Male Pin: Copper Alloy, Gold Plated
 - * Shield: Zinc Alloy, Nickel Plated
 - * Nut: Zinc Alloy, Nickel Plated
 - * O-Ring: Black, EPDM
 - * For Panel Thickness Max 4.5mm
 - * Wire Harness: UL1007 (5PCS)
 - * Nut Torque: 4-6 kgf.cm

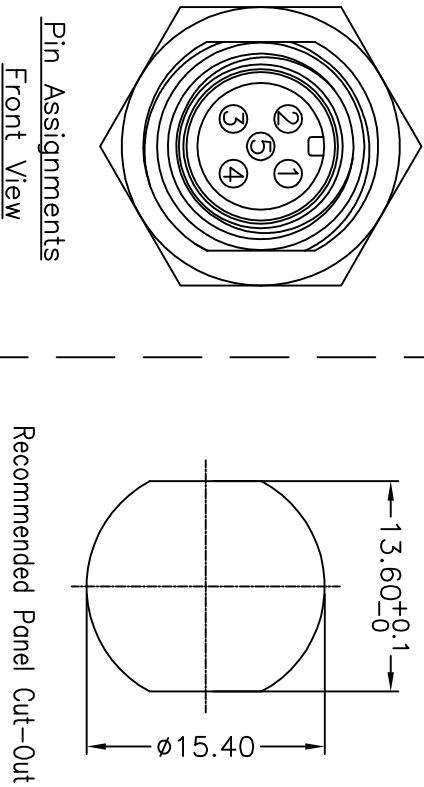

5	Blue	(22AWG)
4	White	(22AWG)
3	Black	(18AWG)
2	Red	(18AWG)
1	Green	(22AWG)
	Conn.	Wire Color



* Nut Torque: 4-6 kgf.cm

UNIT:mm		TITLE	M12 Conn NMEA	ITEM NO	MC-05PMMS-SF8001	DRAWN BY	Myrdal Manzano	DATE	2007/09/29
TOLERANCE	±0.25 XX ±0.1 XXX ±0.05	Panel Screw 5Pin M Conn M Pin	SCALE	Free	MC-05PMMS-SF8001	CHECKED BY	Alan MU Sundo	DATE	2007/10/02
ANGLES	±1°	REV. B	SIZE A4	SHEET 1	CUSTOMER	APPROVED BY	Cloud	DATE	2007/10/04

Pin Assignments
Front View

Recommended Panel Cut-Out

Pin Out

Amphenol LTW
安費諾亮泰企業股份有限公司