


Coaxial PCB Connector 82_BNC-50-0-1/111_N

Description

Straight PCB jack

Interface Standards

IEC 60169-8_MIL-STD-348A/301_CECC 22120

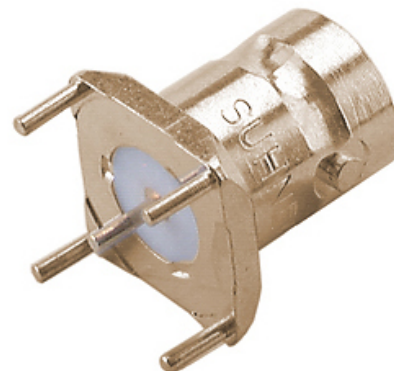

Technical Data

Electrical Data

Impedance 50 Ω
Interface frequency max. 4 GHz

Mechanical Data

Board mounting type through holes
Weight 0.0059 kg

Environmental Data

Operating temperature -65 °C to 165 °C
2011/65/EU (RoHS) compliant

Material Data

Piece Parts	Material	Surface Plating
Centre contact	Copper Beryllium Alloy	SUCOPRO Plating
Outer contact	Brass	SUCOPRO Plating
Body	Brass	SUCOPRO Plating
Insulator	PFA / PTFE	

Related Documents

Outline drawing DOU-00013009
Catalogue drawing DCA-00013001
Mounting hole DOU-00012084

Ordering Information

Single package 82_BNC-50-0-1/111_NE
Tray package 82_BNC-50-0-1/111_NH
Tray package 82_BNC-50-0-1/111_NY

Remarks

PCB connector with stand-offs

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

HUBER+SUHNER:

[82_BNC-50-0-1/111_NE](#) [82_BNC-50-0-1/111_NH](#)