
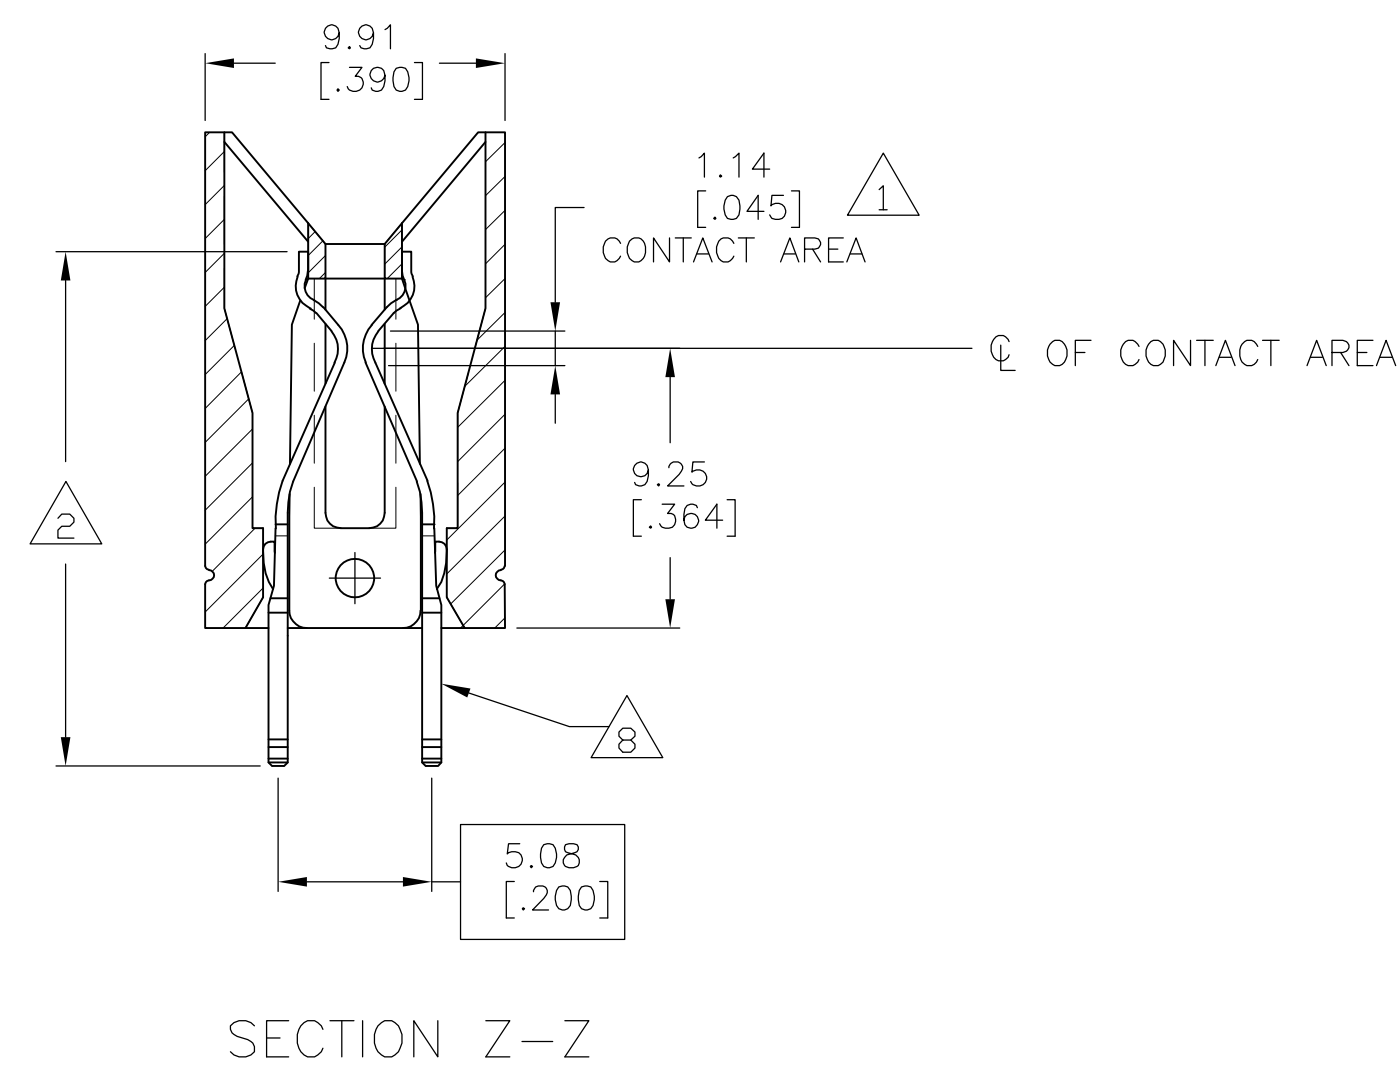
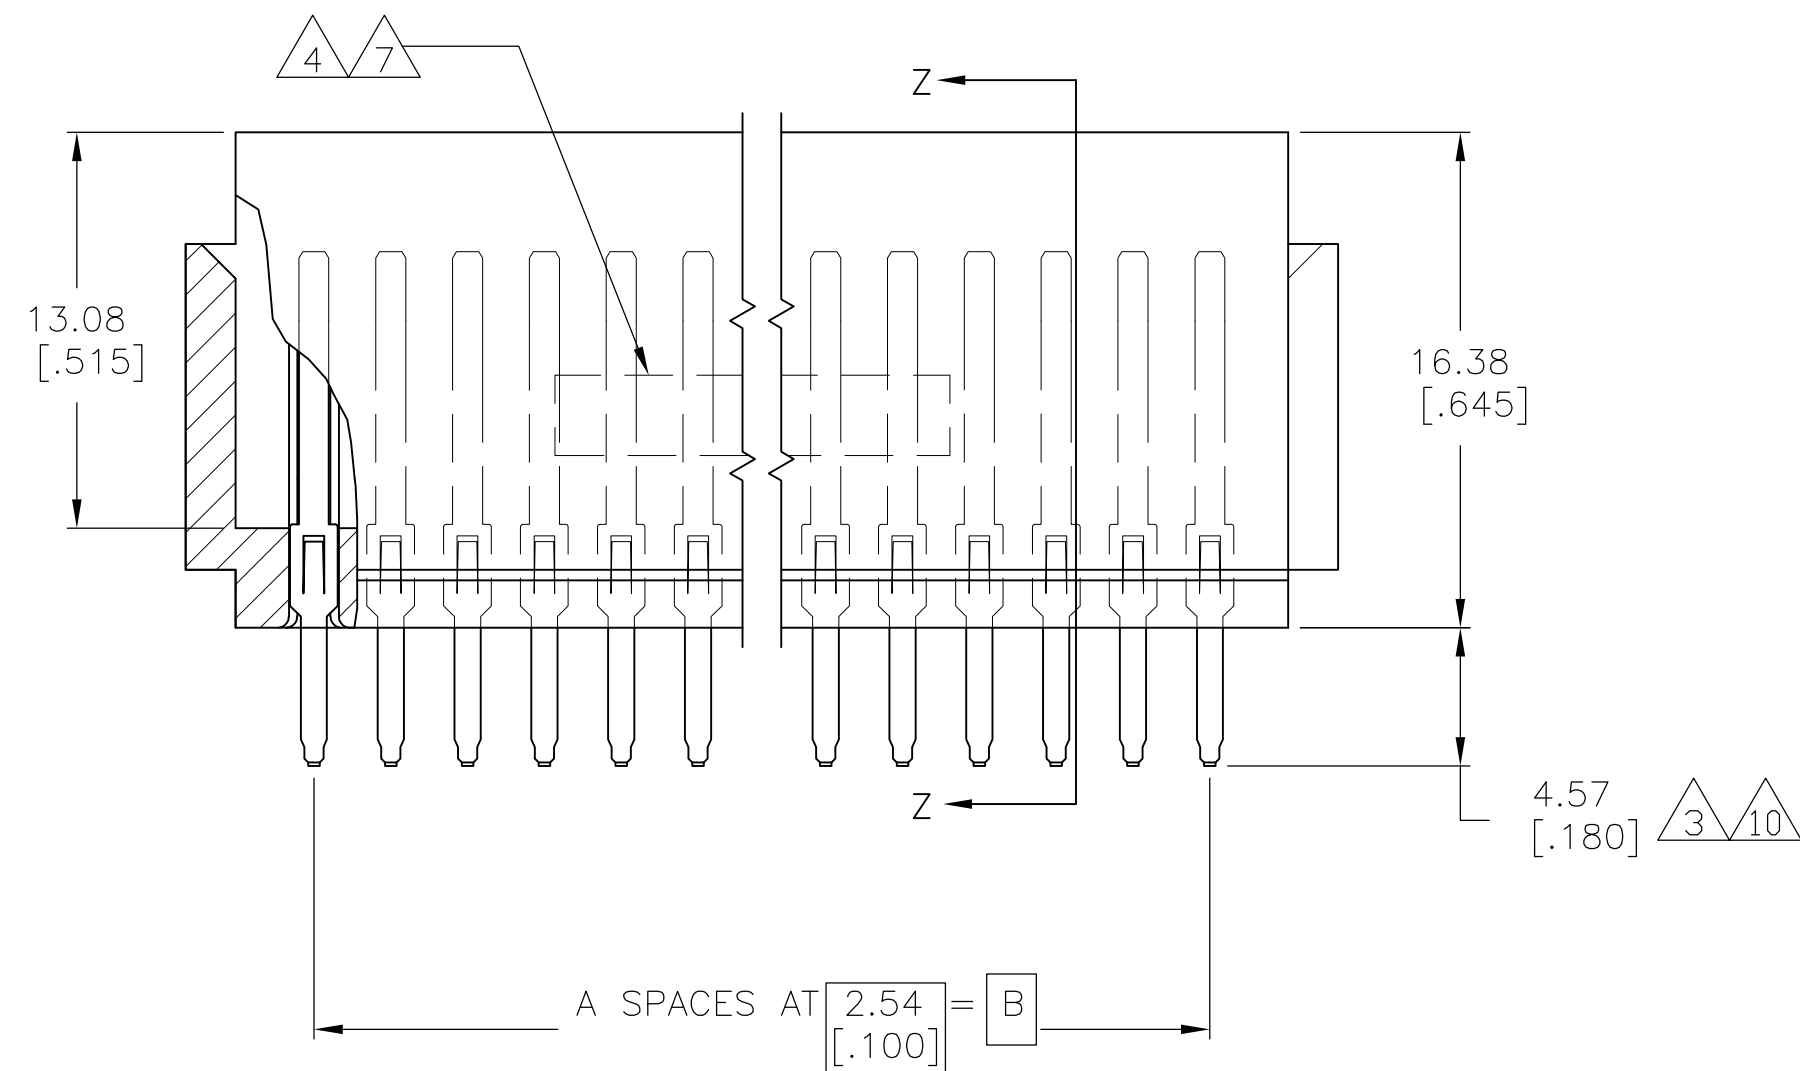


THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	- , -
(C) COPYRIGHT - By - ALL RIGHTS RESERVED.		

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	F	REVISED PER ECO-17-012525	25AUG2017	SY	SY

- ① GOLD PLATE .00076 [.000030] MIN. THICK.
- ② NICKEL PL. .00127[.000050] MIN. THK. PER QQ-N-290.
- ③ SOLDER PL. .00076[.000030] MIN. THK.
- ④ STAMPED P/N & DATE CODE.
5. OPTIONAL: KEYING PLUG FOR INTERCONTACT KEYING IS 118982-1.
6. OPTIONAL: CARD GUIDE (BASE NO 117169).
- ⑦ ALL PARTS ASSEMBLED IN CHINA MUST BE STAMPED "ASSY IN CHINA". THE WORD "CHINA" CAN BE SUBSTITUTED ONLY WHERE PART SIZE PROHIBITS STAMPING "ASSY IN CHINA", INK PER 115-9009, APPROX WHERE SHOWN, SIDE OPTIONAL.
- ⑧ PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
- ⑩ MATTE TIN PL. .00076[.000030] MIN. THK.

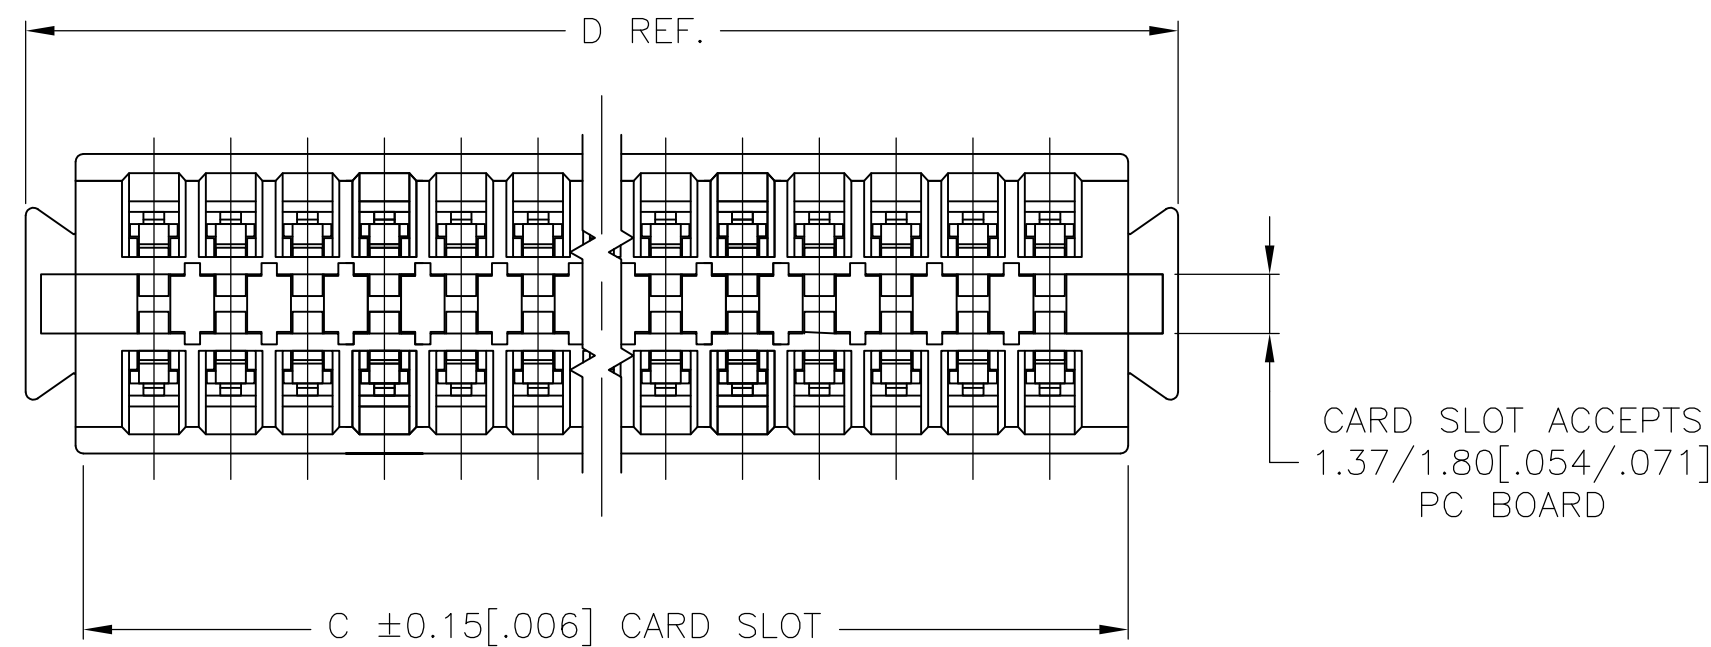

△	OBSOLETE	—44.04[1.734]	40.74[1.604]	35.56[1.400]	14	15	5-147885-2
	△	31.34[1.234]	28.04[1.104]	22.86[.900]	9	10	5-147885-1
		44.04[1.734]	40.74[1.604]	35.56[1.400]	14	15	147885-2
	OBSOLETE	—31.34[1.234]	28.04[1.104]	22.86[.900]	9	10	147885-1
		D	C	B	A	POSN.	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. BROWN 22MAY01		PART NO.	
DIMENSIONS: mm [INCHES]		CDR R. BENDROF 22MAY01		 TE Connectivity	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.25[.010] 4 PLC ± - ANGLES ± -		APVD M. MILLER 22MAY01 PRODUCT SPEC APPLICATION SPEC 114-26002 WEIGHT 0.000000		NAME CONNECTOR, AMP PACE .100 X .200 - - -	
MATERIAL HOUSING: UL94V-0 CONTACTS: COPPER NICKEL		FINISH  CUSTOMER DRAWING		SIZE A10	
		CAGE CODE 00779		DRAWING NO 147885	
				RESTRICTED TO 	
		SCALE 4:1		SHEET 1 OF 1	
				REV F	