



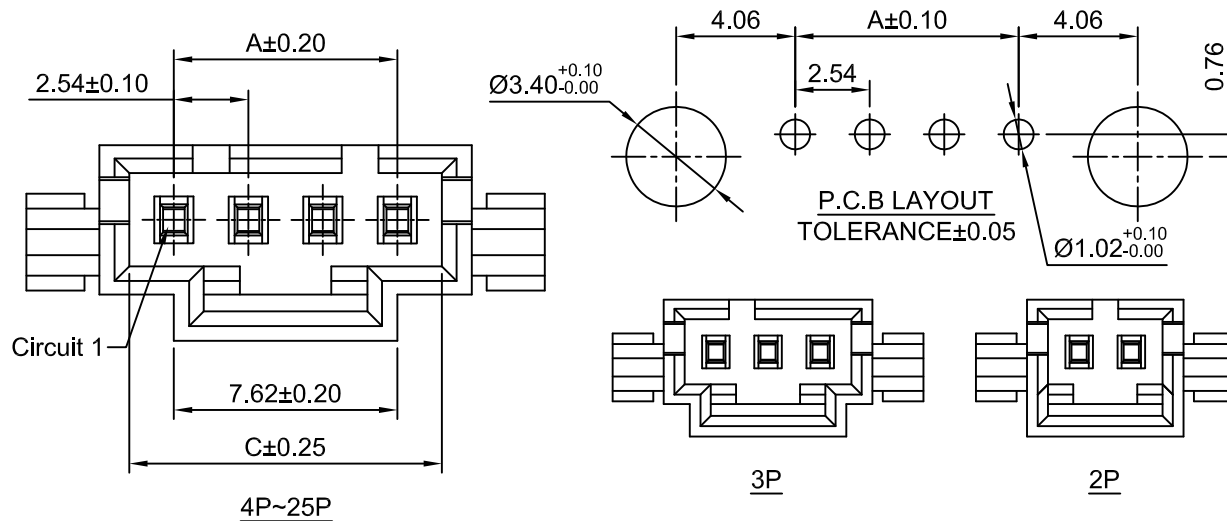

Odering Information:

A2547WVA-F2-XP - *** - G
1 2 3

- Part NO.
- Material:
(Blank): PBT,UL94V-0(Black)
LCP: LCP,UL94V-0(Black)
- Finish:
(Blank): Tin over Nickel
G: Gold over Nickel

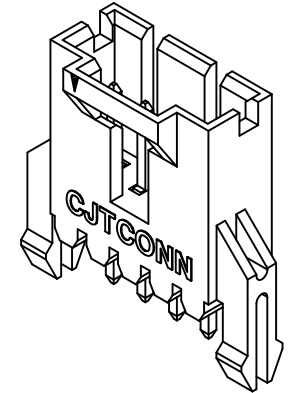

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	2.54	7.62	5.59	14P	33.02	38.10	36.07
3P	5.08	10.16	8.13	15P	35.56	40.64	38.61
4P	7.62	12.70	10.67	16P	38.10	43.18	41.15
5P	10.16	15.24	13.21	17P	40.64	45.72	43.69
6P	12.70	17.78	15.75	18P	43.18	48.26	46.23
7P	15.24	20.32	18.29	19P	45.72	50.80	48.77
8P	17.78	22.86	20.83	20P	48.26	53.34	51.31
9P	20.32	25.40	23.37	21P	50.80	55.88	53.85
10P	22.86	27.94	25.91	22P	53.34	58.42	56.39
11P	25.40	30.48	28.45	23P	55.88	60.96	58.93
12P	27.94	33.02	30.99	24P	58.42	63.50	61.47
13P	30.48	35.56	33.53	25P	60.96	66.04	64.01

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE 2.54mm PITCH VERTICAL WAFER
mm	4:1	1 of 1	
DRWN	CHK'D	APPR	
Dengchun Yi	Diankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A2547WVA-F2-XP-G
x.xx±0.25			
x.xx±0.20			
x.xxx±0.15			REV A1
ANGLES ±1°			