

FLT-SEC-H-T1-264/25-P - Type 1 surge protection plug



2905968

<https://www.phoenixcontact.com/us/products/2905968>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Replacement plug for lightning current arresters from the FLASHTRAB SEC HYBRID 264 product range, for L-N and L-PEN paths.



Your advantages

- Surge protection family for universal use with optimum energy coordination from the lightning current arrester to the device protection
- Easy to maintain due to consistently pluggable protection modules
- Excellent level of information provided by mechanical/visual status indicator and remote indication contact
- Optimum protective effect in the event of high-energy lightning currents, thanks to spark gap technology with low residual voltage characteristic
- Integrated lightning-current-proof backup fuse for a low overall voltage protection level and space savings of up to 80% compared to an external backup fuse

Commercial data

Item number	2905968
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	CL1162
Catalog page	Page 34 (C-4-2019)
GTIN	4055626012032
Weight per piece (including packing)	389.2 g
Weight per piece (excluding packing)	335.78 g
Country of origin	DE

FLT-SEC-H-T1-264/25-P - Type 1 surge protection plug

2905968
<https://www.phoenixcontact.com/us/products/2905968>

Technical data

Notes

General	
Note	Max. single impulse: 100 kA (8/20 µs)
	SPD according to AS/NZS 1768 Cat. C3

Product properties

Product type	Replacement plug
Product family	SEC Family
IEC test classification	I / II
	T1 / T2
EN type	T1 / T2
IEC power supply system	TN
Type	Male
Number of positions	1
Surge protection fault message	optical

Insulation characteristics	
Overvoltage category	III
Pollution degree	2


Electrical properties

Nominal frequency f_N	50 Hz (60 Hz)
-------------------------	---------------

Connection data

Connection method	pluggable
-------------------	-----------

Dimensions

Dimensional drawing	
Width	35.5 mm
Height	113.4 mm
Depth	64.2 mm
Horizontal pitch	2 Div.

Material specifications

Color	light grey (RAL 7035)
	gray (RAL 7042)
Flammability rating according to UL 94	V-0
CTI value of material	600

FLT-SEC-H-T1-264/25-P - Type 1 surge protection plug



2905968

<https://www.phoenixcontact.com/us/products/2905968>

Insulating material	PA 6.6-FR 20% GF
	PBT-FR
Material group	I
Housing material	PA 6.6-FR 20 % GF
	PBT-FR

Protective circuit

Mode of protection	L-PEN
Direction of action	L-N / L-PEN
Nominal voltage U_N	240 V AC (TN)
Nominal frequency f_N	50 Hz (60 Hz)
Maximum continuous voltage U_C	264 V AC
Nominal discharge current I_n (8/20) μ s	25 kA
Maximum discharge current I_{max} (8/20) μ s	50 kA
Impulse discharge current (10/350) μ s, charge	12.5 As
Impulse discharge current (10/350) μ s, specific energy	160 kJ/ Ω
Impulse discharge current (10/350) μ s, peak value I_{imp}	25 kA
Follow current interrupt rating I_{fi}	50 kA
Short-circuit current rating I_{SCCR}	50 kA
Voltage protection level U_p	≤ 1.5 kV
Residual voltage U_{res}	≤ 1.5 kV (at I_n)
	≤ 2.5 kV (at 50 kA)
	≤ 1.2 kV (at 12.5 kA)
	≤ 1 kV (at 5 kA)
	≤ 0.9 kV (at 2.5 kA)
Front of wave sparkover voltage at 6 kV (1.2/50) μ s	≤ 1.5 kV
TOV behavior at U_T	415 V AC (5 s / withstand mode)
	460 V AC (120 min / withstand mode)
Response time t_A	≤ 100 ns

Additional technical data

Maximum continuous voltage U_C	275 V AC
Short-circuit current rating I_{SCCR}	100 kA
Follow current interrupt rating I_{fi}	100 kA

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-40 °C ... 80 °C
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Altitude	≤ 4000 m (amsl)
Permissible humidity (operation)	5 % ... 95 %

Standards and regulations

FLT-SEC-H-T1-264/25-P - Type 1 surge protection plug



2905968
<https://www.phoenixcontact.com/us/products/2905968>

Standards/specifications	IEC 61643-11
Note	2011

EN 61643-11

Standards/specifications	EN 61643-11
Note	2012

Mounting

Mounting type	on base element
---------------	-----------------

FLT-SEC-H-T1-264/25-P - Type 1 surge protection plug


2905968

<https://www.phoenixcontact.com/us/products/2905968>




Drawings

Circuit diagram

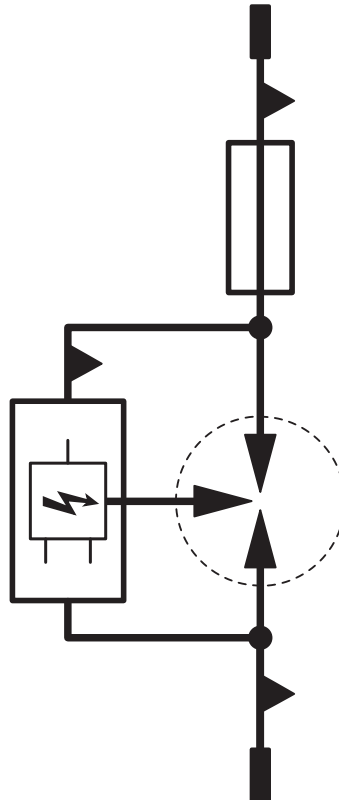

Dimensional drawing

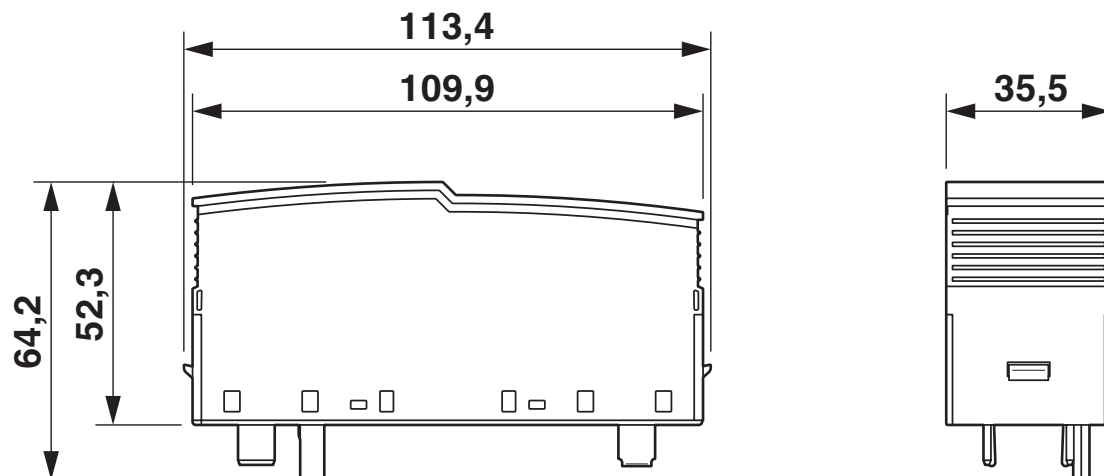

FLT-SEC-H-T1-264/25-P - Type 1 surge protection plug



2905968

<https://www.phoenixcontact.com/us/products/2905968>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2905968>



IECEE CB Scheme

Approval ID: NL-36550



EAC

Approval ID: RU C-DE.*09.B.00169

CCA

Approval ID: NTR-NL 7417



KEMA-KEUR

Approval ID: 2175106.01

FLT-SEC-H-T1-264/25-P - Type 1 surge protection plug



2905968
<https://www.phoenixcontact.com/us/products/2905968>

Classifications

ECLASS

ECLASS-11.0	27130890
ECLASS-13.0	27171292

ETIM

ETIM 9.0	EC002496
----------	----------

UNSPSC

UNSPSC 21.0	39121600
-------------	----------

FLT-SEC-H-T1-264/25-P - Type 1 surge protection plug



2905968
<https://www.phoenixcontact.com/us/products/2905968>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

FLT-SEC-H-T1-264/25-P - Type 1 surge protection plug



2905968

<https://www.phoenixcontact.com/us/products/2905968>

Accessories

EML (20XE)R - Label

0803452

<https://www.phoenixcontact.com/us/products/0803452>



Label, Roll, white, unlabeled, can be labeled with: THERMOMARK E.300 (D)/600 (D), THERMOMARK ROLL 2.0, THERMOMARK ROLL, THERMOMARK ROLL X1, THERMOMARK ROLLMaster 300/600, THERMOMARK X1.2, mounting type: adhesive, lettering field size: continuous x 20 mm, Number of individual labels: 1

EML (20XE)R YE - Label

0803453

<https://www.phoenixcontact.com/us/products/0803453>



Label, Roll, yellow, unlabeled, can be labeled with: THERMOMARK E.300 (D)/600 (D), THERMOMARK ROLL 2.0, THERMOMARK ROLL, THERMOMARK ROLL X1, THERMOMARK ROLLMaster 300/600, THERMOMARK X1.2, mounting type: adhesive, lettering field size: continuous x 20 mm, Number of individual labels: 1

FLT-SEC-H-T1-264/25-P - Type 1 surge protection plug

2905968

<https://www.phoenixcontact.com/us/products/2905968>



X-PEN 0,35 - Marker pen

0811228

<https://www.phoenixcontact.com/us/products/0811228>



Marker pen without ink cartridge, for manual labeling of markers, labeling extremely wipe-proof, line thickness 0.35 mm

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com