
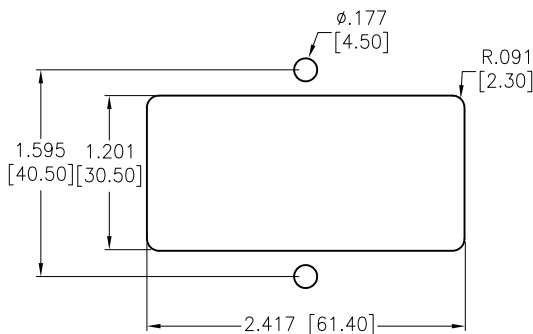
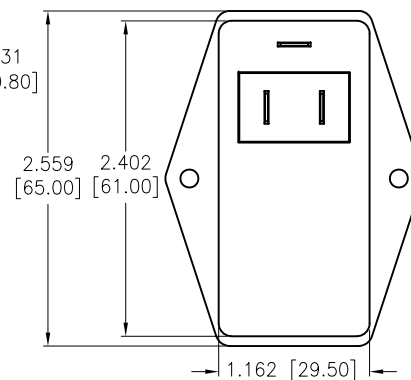
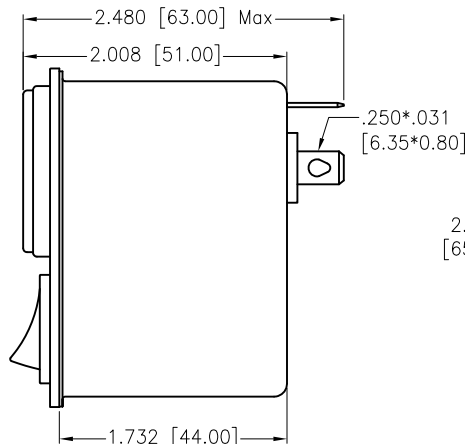


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/7/22	
A		ADDED SPEC.	7/26/23	LH/RC
B		UPDATE DRAWING	11/21/23	LH/RC
C		UPDATE DRAWING	12/28/23	LH/SL

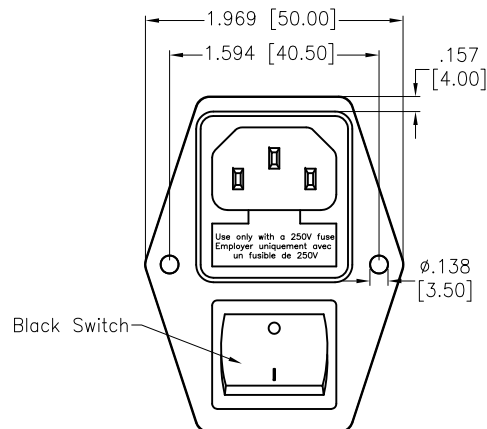

RECOMMENDED PANEL CUT

SPECIFICATIONS:

Electrical:

Voltage rating: 115/250 VAC

Current rating: 115/250 VAC: 6A RMS max

Operating Frequency: 50/60Hz

Leakage Current: Each Line To Ground

①115VAC/60HZ 2.0uA max

②250VAC/50HZ 5.0uA max

Hipot Rating(For 1 Minute)

A. Line to Ground: 2,250 VDC

B. Line to Line: 500 VDC



IR: 100 Mohm @500 VDC Any Input or Output to Ground

Temperature Rating:

-25°C to +100°C

Environmental:

Lead free, RoHS compliant

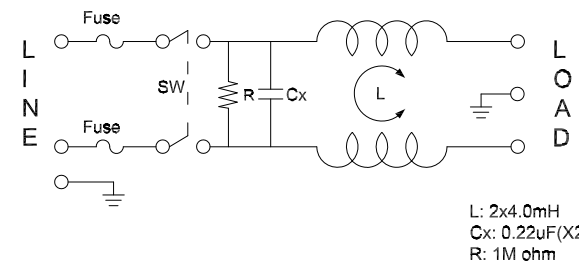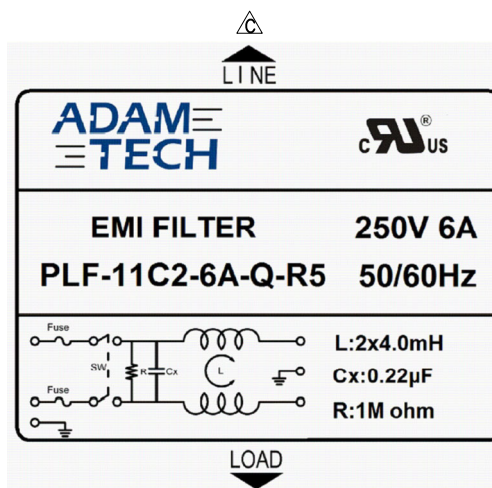

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ±.10	Ø.X ±.10
.XX ±.020	Ø.XX ±.015
.XXX ±.015	Ø.XXX ±.010

DRAWN	WX	11/7/22
CHECKED	RC	11/7/22
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
FILTERED POWR ENTRY MODULE, MEDICAL GRADE
115/250VAC 6A, DUAL FUSE, SWITCH, FLANGE MOUNT

SIZE X	PART NO. PLF-11C2-6A-Q-R5	REV. C
REF: S00205C	SCALE: NTS	SHEET 1 OF 2

6

5

4

3

2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev

AWO #

Description

Date


Appr

SEE SHT 1 OF 2 FOR REVISION

INSERTION LOSS(IN 50 ohm system according IEC/CISPR

(common mode)

(differential mode)

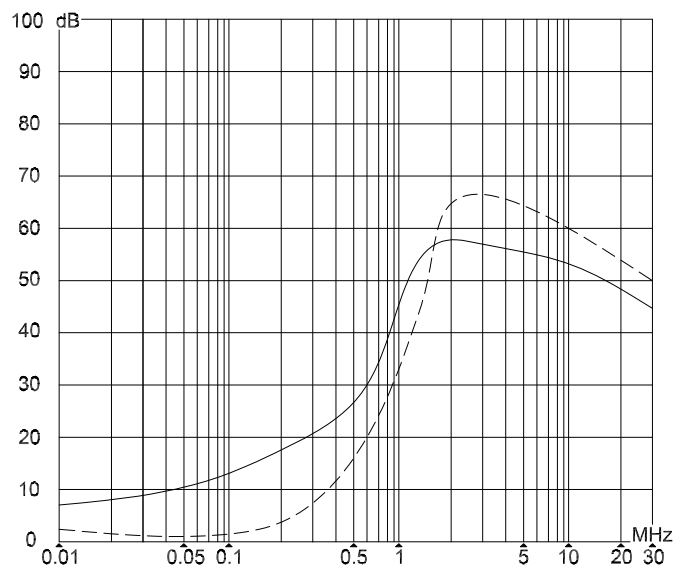UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

DRAWN

WX

11/7/22

CHECKED

RC

11/7/22

APPROVED

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY
AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN
PERMISSION FROM ADAM TECH**ADAM**
TECH909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE

FILTERED POWR ENTRY MODULE, MEDICAL GRADE
115/250VAC 6A, DUAL FUSE, SWITCH, FLANGE MOUNT

SIZE

X

PART NO.

PLF-11C2-6A-Q-R5

REV.

C

REF:

S00205C

SCALE: NTS

SHEET 2 OF 2

6

5

4

3

2

1