
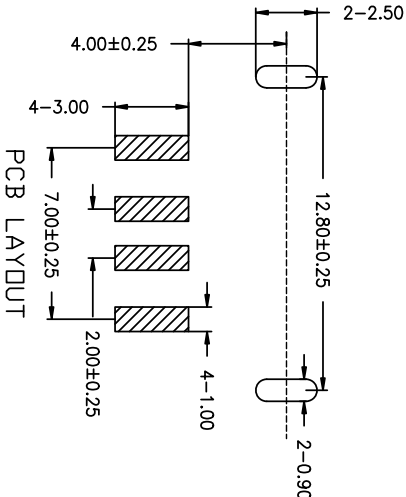


12345678910

RoHS

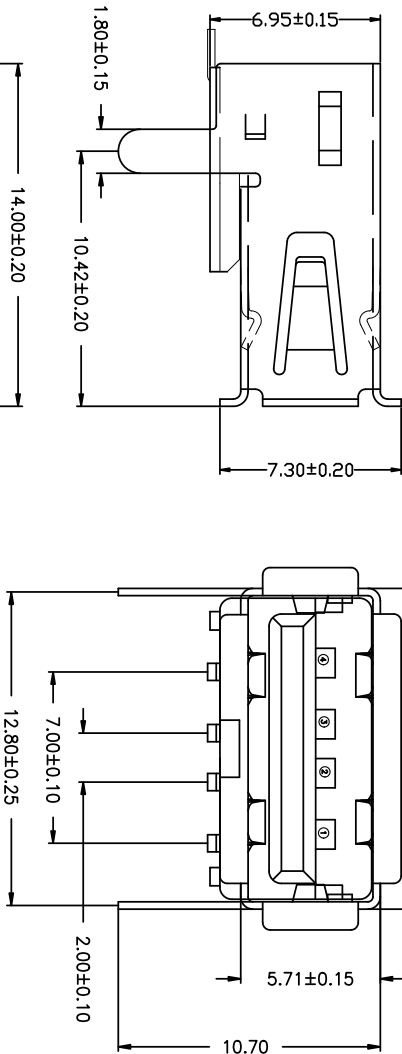

电气特性:Electrical:

1. 额定电流: Current Rating

1. 5A/contact terminal

2. 额定电压: Voltage Rating

30V DC

3. 接触阻抗: Contact Resistance

30 milliohms MAX

4. 耐电压: Dielectric Withstanding Voitage:

500 V AC AT Sea Level

5. 绝缘阻抗: Insulation Resistance:

1000MEGA ohms MIN

物理性能: Mechanical:

1. 插拔力: Connector Mate and Unmate Force

Mate force: 3. 57kgf (MAX)

Unmate force: 0. 7kgf (MIN)

2. 端子保持力: Terminal Retention

1. 0kgf (MIN)

3. 寿命: 1500 次

原材料: Matorial:

1. 塑胶: Housing: LCP BK

2. 端子: Contact: Copper Alloy C2680

3. 外壳: Shell: C2680

电镀: Finish:

1. 端子Contact: Au G/Fu" Plated on contact area

Tin50u" Plated on solder area

Nickel 50u" Plated underplating over all.

2. 外壳Shell: Nickel 50u" Min plating over all.

产品图

公差一览表

深圳市精拓金电子有限公司
Shenzhen Jing Tuo Jin Electronics Co., Ltd.

Pin NUMBER	SIGNAL NAME	公差一览表				单位	制图	制料料号
1	V BUS	TOLERANCE UNLESS OTHERWISE				MM	L-S-S	903-242B2023S10210
2	D-	X.	±0.35	X.	±5.°	比例	审核	产品名称
3	D+	.X	±0.25	.X	±2.°	SCALE	郭治富	AP 无后盖直脚有边内滑14.0铜壳反向
4	GND	.XX	±0.20	.XX	±1.°	日期	核准	PRODUCT NO 一型加宽LCP黑胶SMT
		.XXX	±0.05	.XXX	±0.5°	2021-03-10	黄国荣	角法
						DATE	VER	版本
								AO