


Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

TO

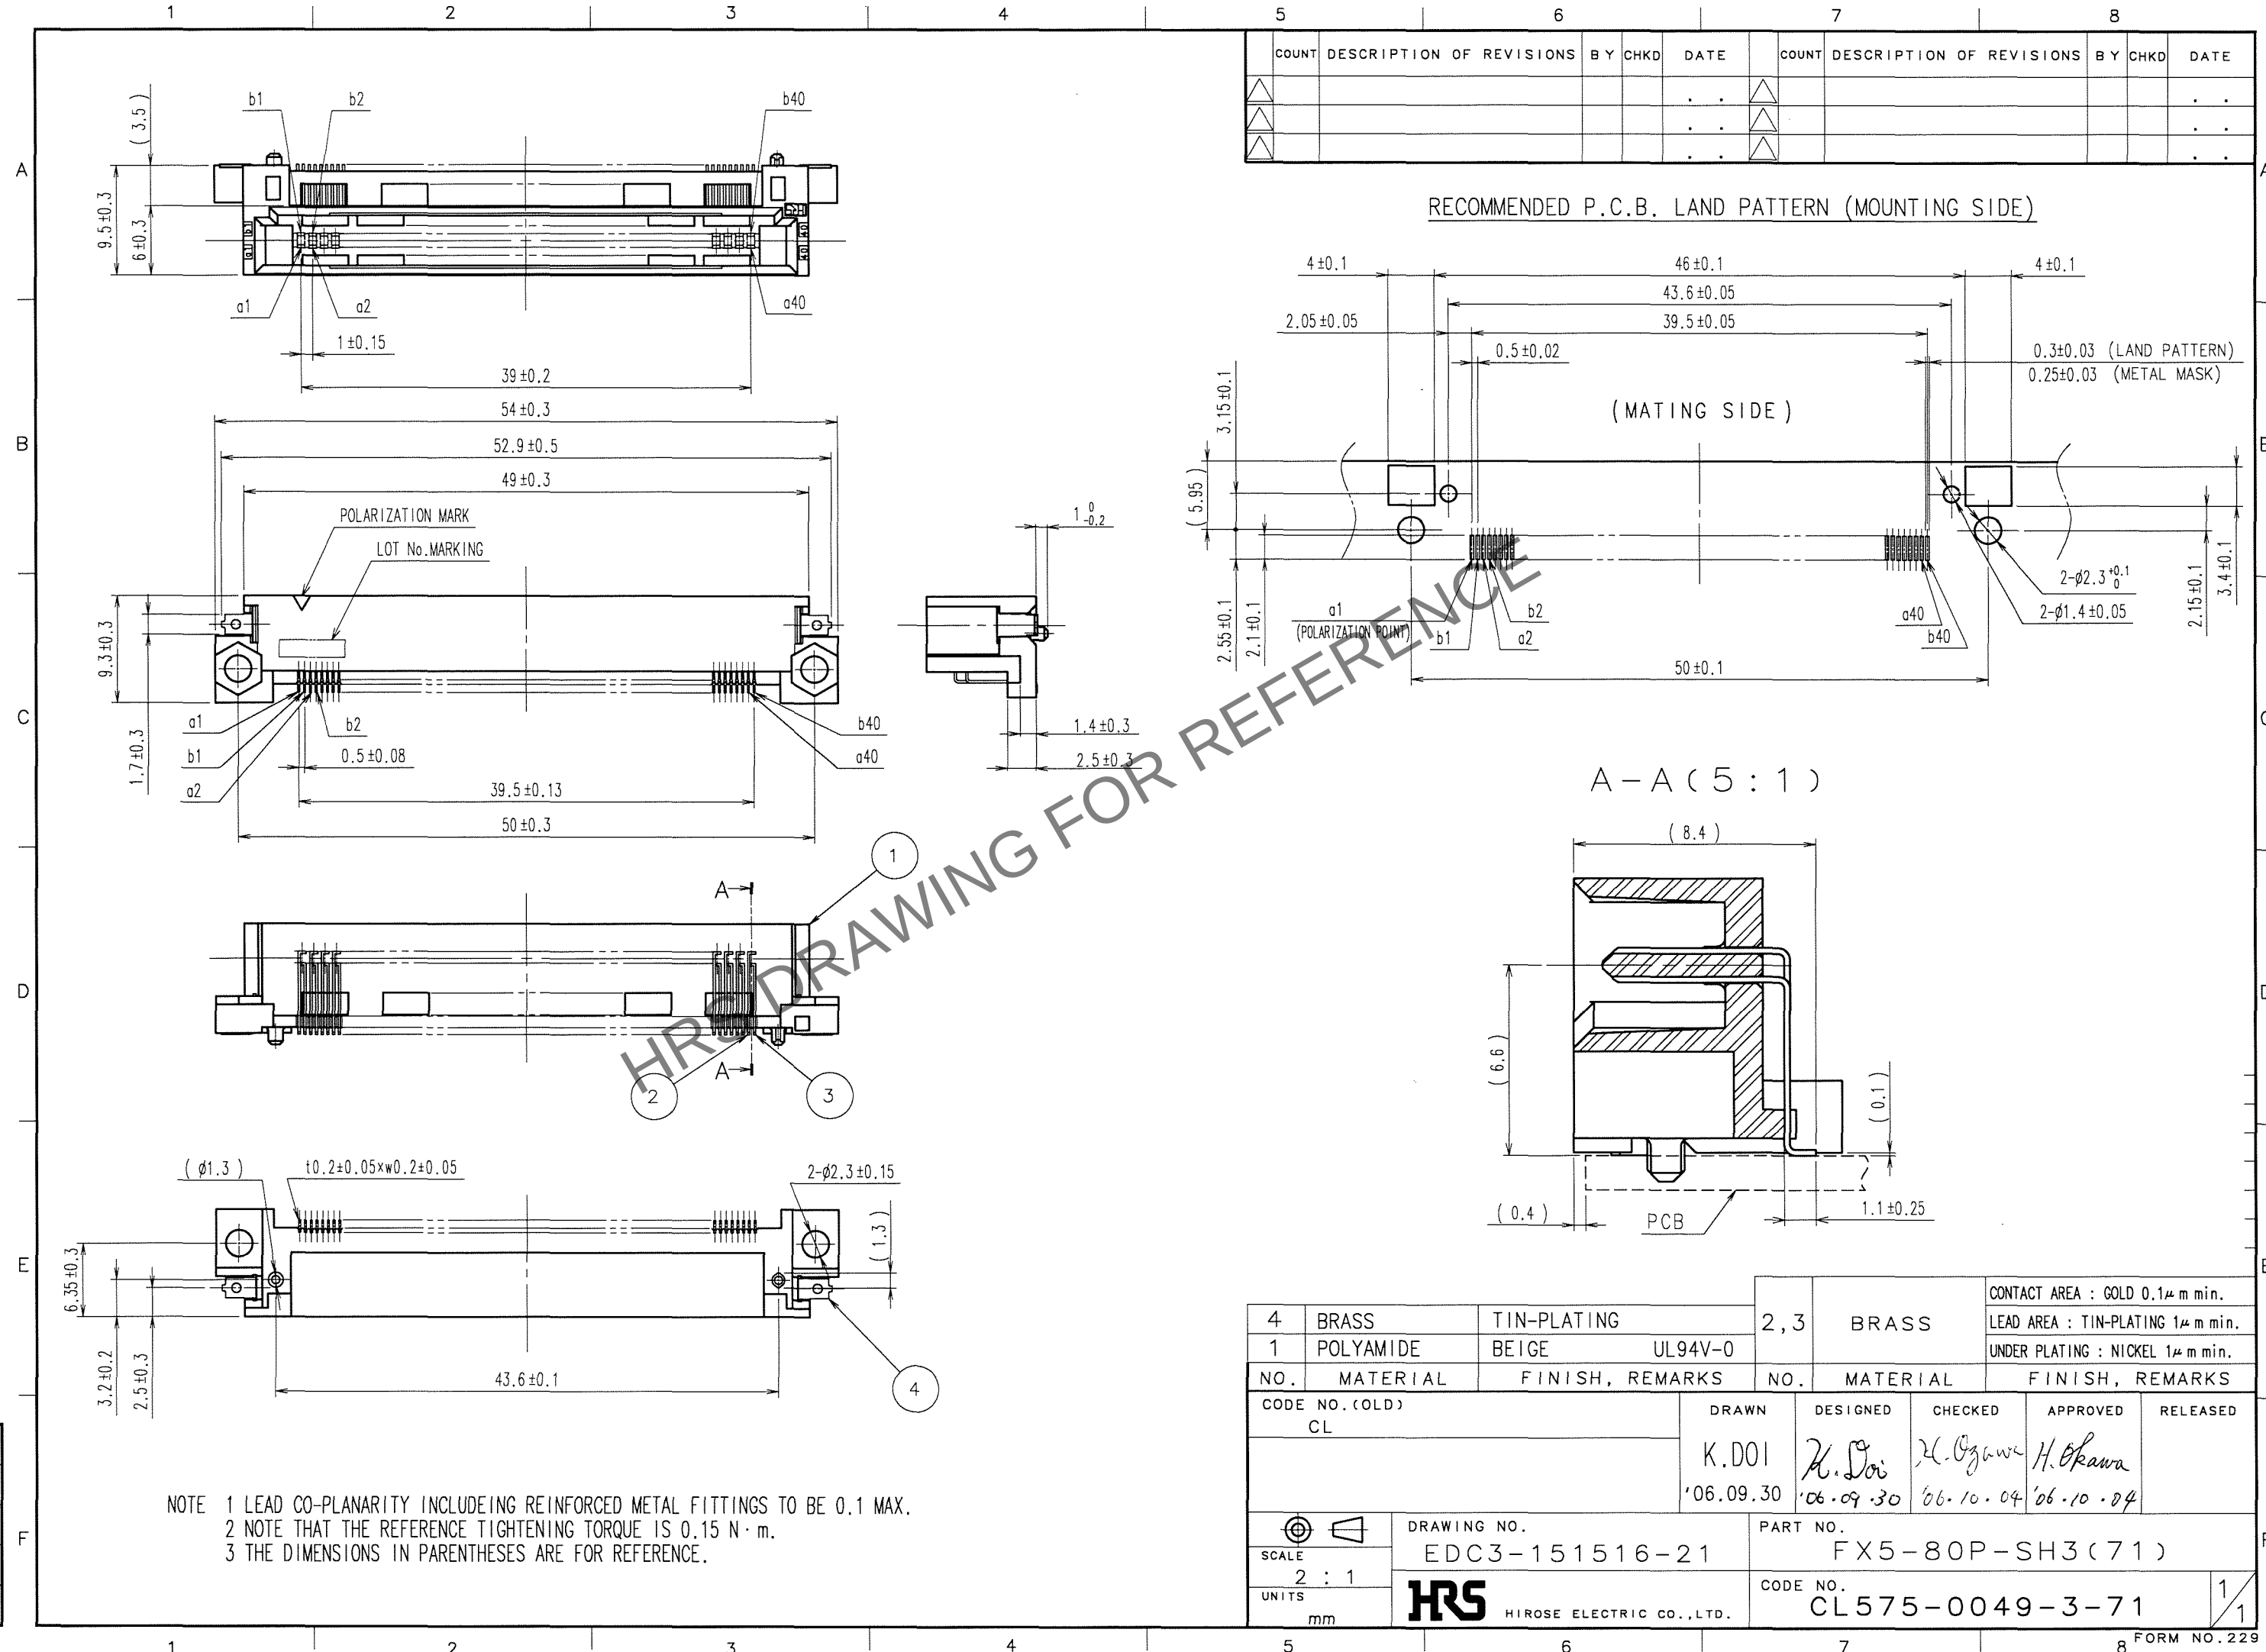

NOTE 1 LEAD CO-PLANARITY INCLUDING REINFORCED METAL FITTINGS TO BE 0.1 MAX.
2 NOTE THAT THE REFERENCE TIGHTENING TORQUE IS 0.15 N·m.
3 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE

4	BRASS	TIN-PLATING	2, 3	BRASS	CONTACT AREA : GOLD 0.1μm min.
1	POLYAMIDE	BEIGE UL94V-0			LEAD AREA : TIN-PLATING 1μm min.
					UNDER PLATING : NICKEL 1μm min.
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD)	CL		DRAWN	DESIGNED	CHECKED
			K.DOI	K. Doi	K. Ogawa
			'06.09.30	'06.09.30	'06.10.04
					H. Okawa
					'06.10.04
SCALE	DRAWING NO.	PART NO.			
2 : 1	EDC3-151516-21	FX5-80P-SH3(71)			
UNITS	mm	CODE NO.			
		CL575-0049-3-71			