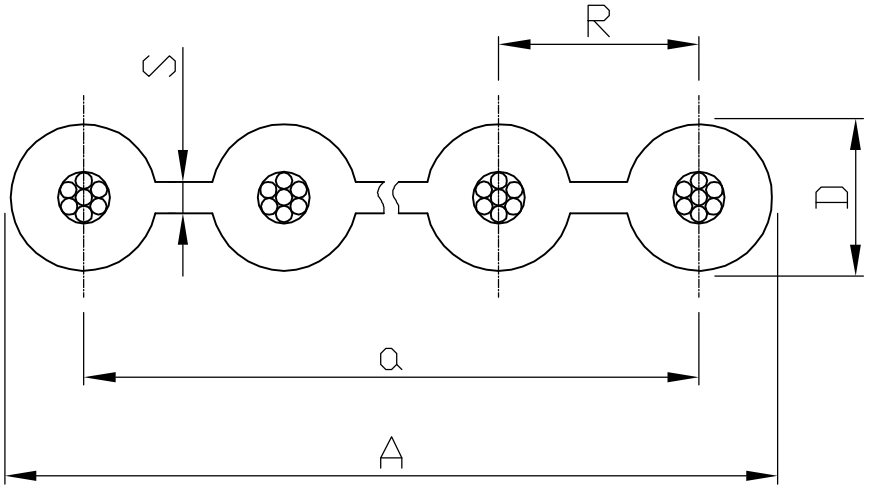

a=(n-1)x1.27 mm
A=(n-1)x1.27 mm+D

NOTES:

MATERIAL
1. Conductor : 7x0.127 mm
2. Color:Grey(RAL 7032)
3. Polarity marking: Red
4. Cross Area:0.09mm²(AWG28/7)
5. Hardness: 94 Shore (A)
6. Pitch: R=1.27 mm
7. Bridge: S=0,23±0,05 mm
8. Diameter: D=0.93 mm

ELECTRICAL
1. Conductor Resistance : <216 Ω/km
2. Insulation Resistance: >100 MΩ
3. Operating voltage : < 300V/50Hz
4. Test voltage: 2KV
5. Capacitance: 60pF/m

ENVIRONMENT
1. Temperature Range: -30°C to +105°C
2. Flammability Rating:UL94 VW-1
3. UL-style : UL2651

RoHS compliant

Scale	FREE					Date	Name	Customer-No.
TOLERANCE		⑤	Update	14.05.2011	Schulz	Drawn	29.09.1997	J.Schulte
X.	±X	④	Update	17.02.2011	Schulz	Approved	14.05.2012	Erdmann
X.X	±X	③	Redraw	13.02.2009	Dean			ASSMANN WSW-No. AWG 28-xx/G
X.XX	±X	②	add new information(H5/6)	29.09.1999	Hellwig			Drawing-No. ASS 0253 CA rev05
DIM	TOL	①	Drawn	29.09.1997	J.Schulte			
X.°	±X°							
X.X°	±X°							
Angle	TOL	Id.	Modification	Date	Name			Replace / Sheet

ASSMANN WSW components

KKXXX

Downloaded from Arrow.com.