
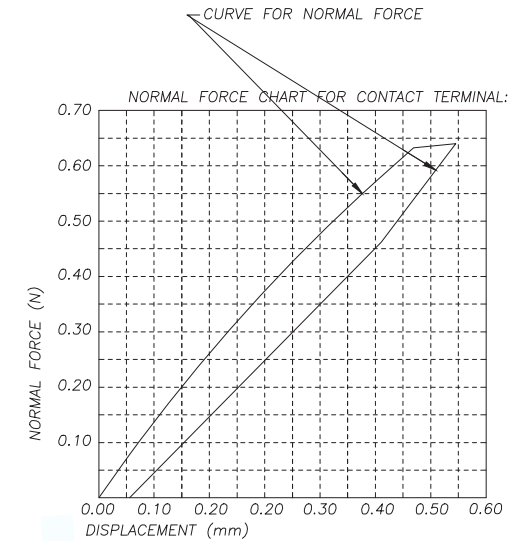
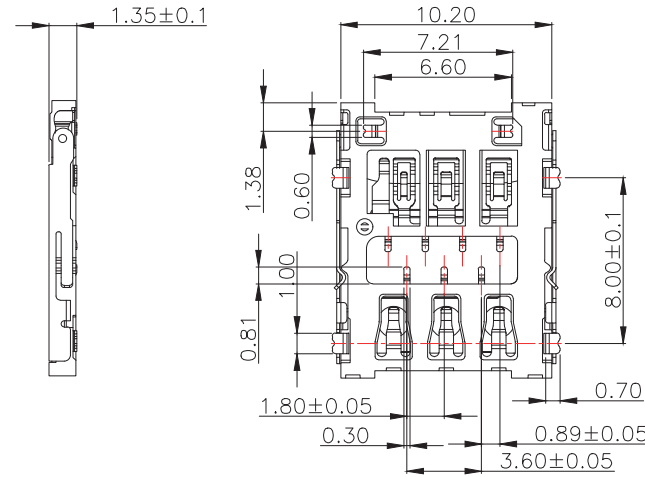


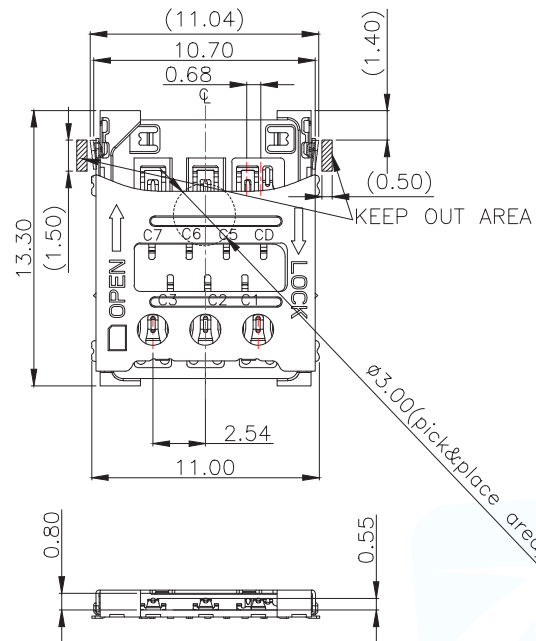

NOTES:

1. MATERIAL:SEE TABLE
2. SPECIALITY:
 - 2.1 RATED CURRENT: 0.5A MAX
 - 2.2 RATED VOLTAGE: 30V AC
 - 2.3 CONTACT RESISTANCE:100MOHM MAX
 - 2.4 INSULATION RESISTANCE:1000MOHM MIN 500V DC
 - 2.5 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/MINUTE.
 - 2.6 SOLDER ABILITY:250±5 10±0.5S.
 - 2.7 DURABILITY:5000 CYCLES
 - 2.8 MATING AND UNMATING FORCE
INSERTION FORCE 10N MAX
WITHDRAWAL FORE 0.5N MIN

③	TERMINAL	6	C5210-EH,T=0.12	Au 3u" PLATING
②	BASE INSULATOR	1	LCP+GF30%	BLACK
①	SHELL	1	SUS304-H,T=0.15	AU/Ni PLATING
NO.	PART NAME	Q'TY	DESCRIPTION	NOTE

MANUFACTURE DWG



UNLESS OTHERWISE SPECIFIED TOLERANCES



TITLE:6+1P 1.35H HINGE NANO SIM CARD CONN.

DECIMALS:

ANGLES:

X.:±0.50

X':±2°

X.X:±0.20

X.X':±1°

X.XX:±0.10

CUSTOMER COPY

PAR

SMN-306-ARP7

DWN

CHKD

APVD


SCALE1:1

UNIT:MM


SIZE:A4

SHEET:1F1

REV:A

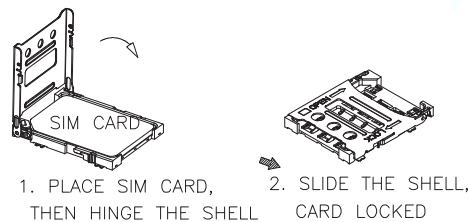

NANO SIM CARD	
Pin No.	NAME
C1	VCC OF SIM
C2	RST OF SIM
C3	CLK OF SIM
C5	GND OF SIM
C6	VPP OF SIM
C7	I/O OF SIM
C4/C8	N/A
CD	DETECTION SWITCH

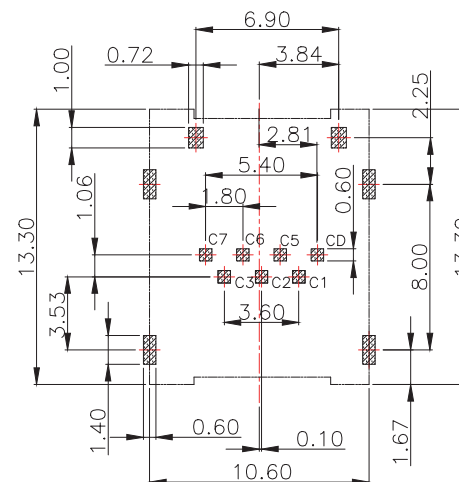


PAD AREA

KEEP OUT AREA

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05

Circuit Diagram for Detect Switch



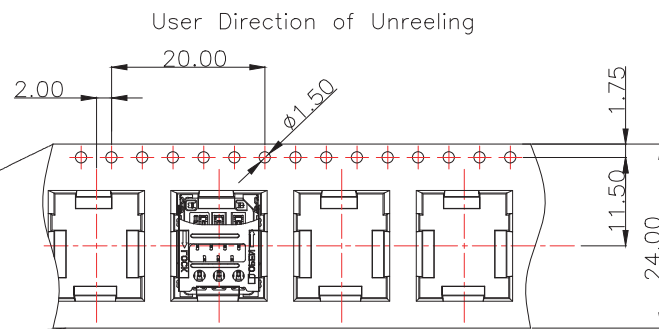


COVER TAPE PEELING ANGLE: $165^{\circ} \sim 180^{\circ}$
PEELING FORCE: 20~130g

CARRIER TAPE

User Direction of Unreeling


DETAIL B



DETAIL B

NOTES

1. NUMBER OF CONNECTORS: 1700PCS/REEL
2. LEAD TAPE LENGTH

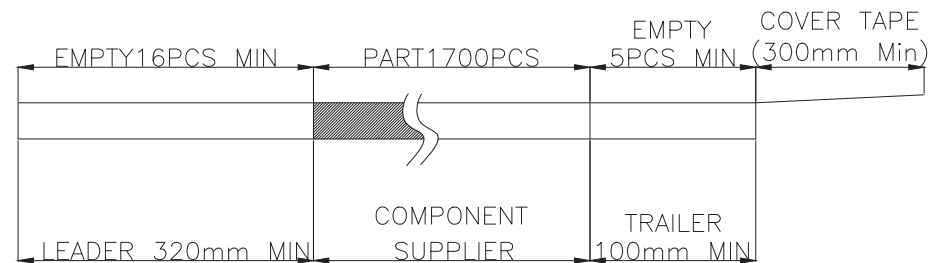


3. QUANTITY: 17,000PCS/CARTON

4. WEIGHT :

3.1 NET WEIGHT : 2.4Kg

3.2 GROSS WEIGHT : 6.5Kg

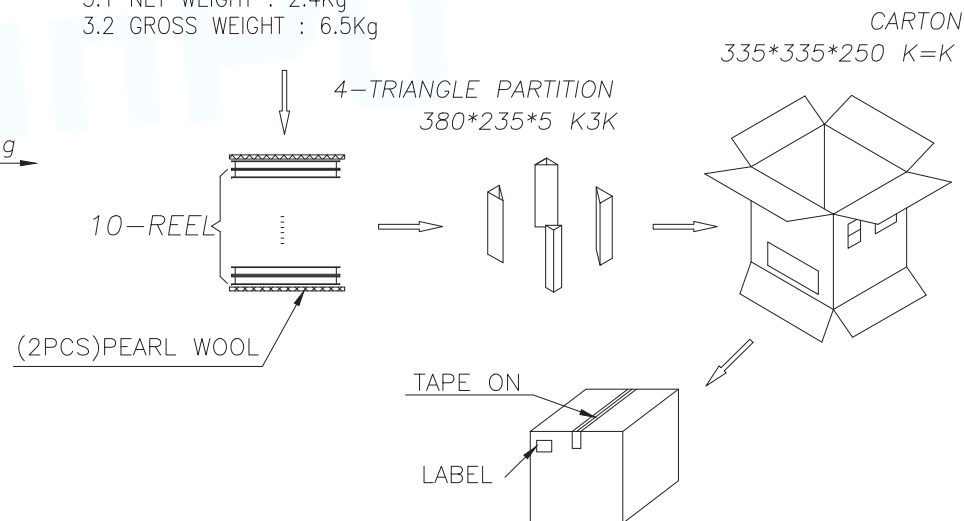

1	SMN-306-ARP7	1700	10	17000
ITEM		PCS/REEL	REEL/CARTON	PCS/CARTON

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd		
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE:6+1P 1.35H HINGE NANO SIM CARD CONN.	
			PAR	SMN-306-ARP7
DECIMALS:	ANGLES:		DWN	
X.:±0.50	X':±2°		CHKD	
X.X:±0.20	X.X':±1°		APVD	
X.XX:±0.10			SCALE1:1	UNIT:MM
CUSTOMER COPY		SIZE:A4	SHEET:1F1	
			REV:A	