
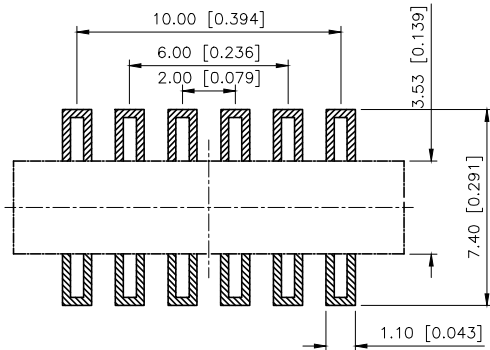
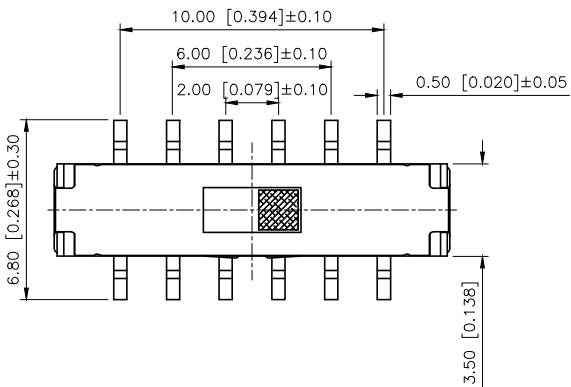
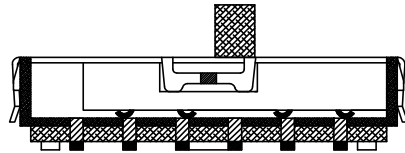





REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.21	阿树

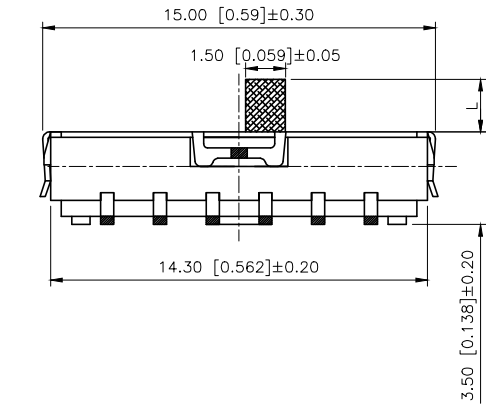

PCB LAYOUT

NOTE:
Rating: DC 12V 50mA
Operating Force:200±100gf
Lifetime:10,000 Cycles

PAPT NO	L
SS-3268S-L1	2.0
SS-3268S-L2	3.0
SS-3268S-L3	4.0
SS-3268S-L4	5.0

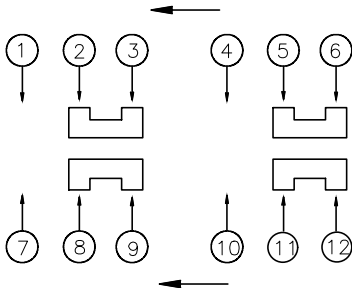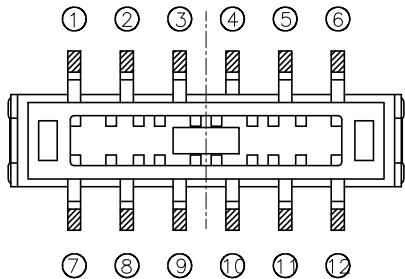

SCHEMATIC

5	Terminal	12	Brass (0.30t)	Ag Plated
4	Contact spring	1	Phosphor branze	Ag Plated
3	Base	1	LCP	Black
2	Cover	1	Sus	Natural
	Keystake	1	PA46	Black
ITEM	PAPT NAME	QTY	MATERIAL	FINISHING

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN	阿树	VIEW:	MODEL TYPE: SLIDE SWITCH
CHECKED		UNIT: mm/in	PART NO.: SS-3268S-x
APPROVED		SIZE: A4	DWG NO.: