


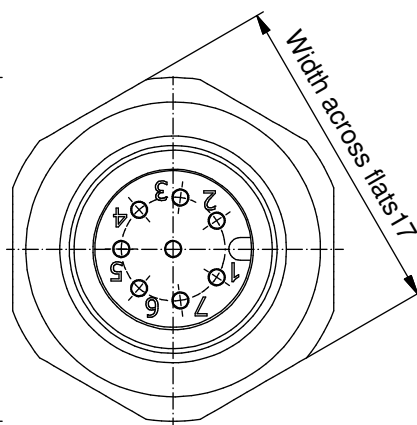


Total spring forces
shroud:
6.00mm 8-9N

Contact:	CuZn, Ni b / Au 0,2 gal.
Contact carrier:	LCP GF
Sealing:	FPM
Socket housing:	CuZn, nickel plated
Grouting:	Polyurethane-resin, UL 94
Shroud:	CuSn, nickel / sel. tin plated
Soldering sheet:	CuZn, nickel / tin plated

Recommended torque:	1-1,2 Nm
Conec installation tool:	Torque wrench: 36-000200 Insert across flats 17: 36-000230
Mounting situation:	see fig. 4 43K1A1791

Contact carrier module suitable
for reflow soldering max. 60s / 250°C

Coplanarity of all contacts, soldering sheets
and shroud max 0.1mm

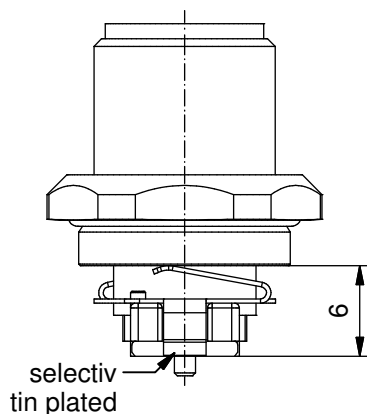[illegible]

Part no. packing unit Tape & Reel:	Part no. packing unit in bulk:	Description:	Pos
43-02114TR	43-02114	SAL - 12S - FS8 - X9 / 14 / SMT	8

see table