

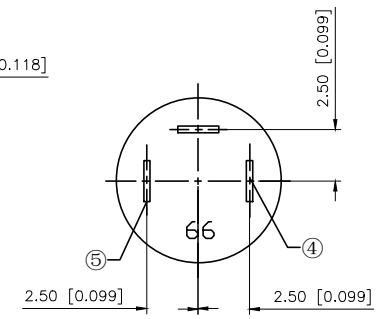
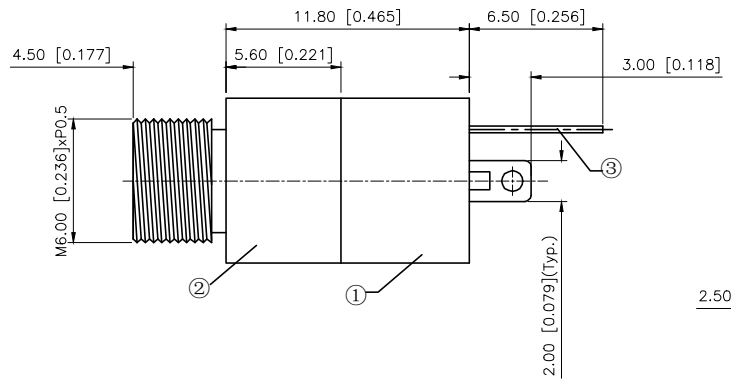

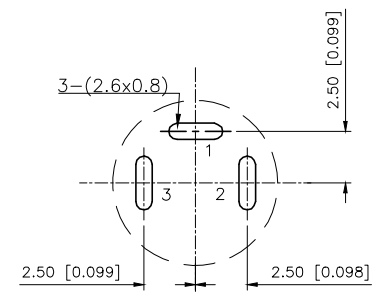




REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.27	阿树

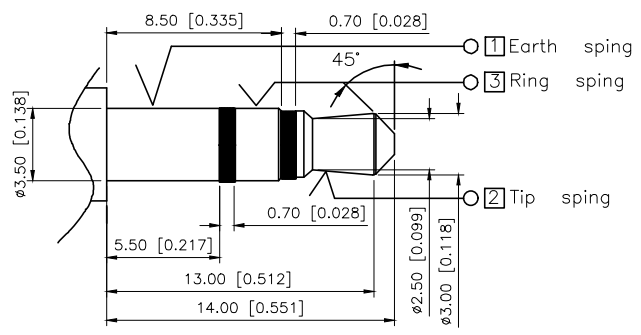

Specification:
1.Rating: DC 30V 0.5A.
2.Contact resistance: ≤30mΩ
After test: ≤50mΩ.
3.Insulation resistance:≥100mΩ (500VDC).
After test:≥50mΩ.
4.Withstanding voltage:500vac.
5.Insertion and extraction force:3N~30N.
6.life test:5000cycles min.
7.Operation temperature range:−20℃+70℃.
8.Preservative temperature range:−40℃+85℃.
9.Sign" "is importance dimension.

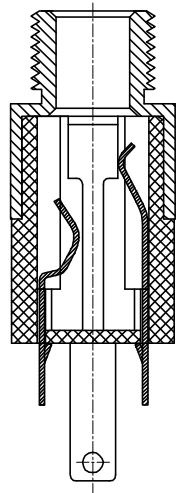

RECOMMENDED P.C.B LAYOUT
UNSPECIFIED TOLERANCE:±0.05
(BOTTOM VIEW)



Matching Plug

CODE	PLATING
_ =B	Bushing&Nut (Ni Plated) Terminal (Ag Plated)
_ =D	Bushing&Nut (Ni Plated) Terminal (Au Plated)
_ =F	Bushing&Nut (Au Plated) Terminal (Au Plated)

Plastic	PBT	
Terminal 3	Phosphor Bronze	TIN
Terminal 2	Phosphor Bronze	TIN
Terminal 1	Phosphor Bronze	TIN
PAPT NAMF	MATERIAL	PLATING

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAuces	



DESIGN	阿树	VIEW:	MODEL TYPE: 3.5 PHONE JACK
CHECKED		UNIT: mm/in	PART NO.: PJ-392W-X
APPROVED		SIZE: A4	DWG NO.: